DOSSI 30 - BUILDERS' CHOICE

60 x 31 1/4 x 20 1/4 (1525 x 795 x 515) • Fax on Demand #5121

SOAKER MODEL #7160620



FEATURES (ALL MODELS)

- Integral tile flange
- Slip-resistant floor
- Pre-leveled base
- Lucite® cast acrylic surface
- Limited 10-year warranty
- UL and IAPMO listed

OPTIONS

- Comfort pillow:
 Biscuit, Black, White
- Bolt-on grab bar(s):
 Chrome, Oil-Rubbed Bronze,
 Polished Brass, Brushed Nickel,
 Color Matched (Biscuit, White)
- Cable drive waste & overflow: Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, Color Matched (Biscuit, Bone, White)
- Lift & turn waste & overflow: Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel

AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet

- Centralized customer service
- Field support
- 24-hour fax-on-demand

COLOR & TRIM OPTIONS

Stock

Almond (C) Bone (C) Biscuit (C) White (C)

C = Color Matched Trim












Builders' Choice Series • Fax on Demand #5121

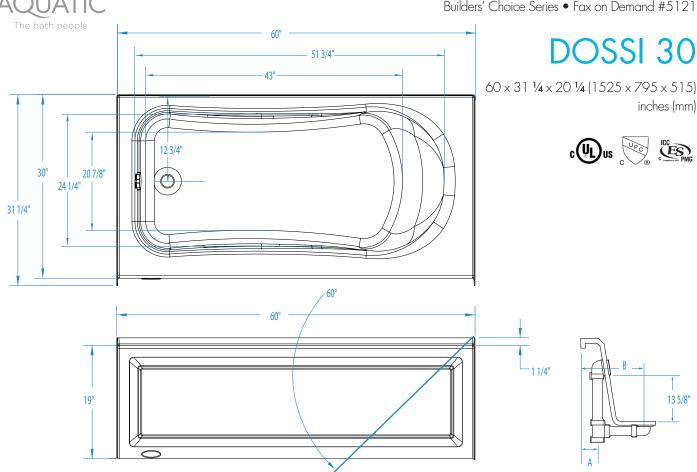

FEATURES Ibs (kg) Dimensional Tolerance ± 38". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Jets	Pump	Air System	Heater	Controls	Drain	Pkg. Wt.
Soaker #7160620	Acrylic	0	-	-	-	-	LH or RH	95 (43)

Overflow

gal (ltr)

53 (201)

DIMENSIONS inches (mm)

Width	Depth	Height	Skirt
Overall / Net	Overall / Net	Overall / Net	Height
60 (1525)	31 ¼ (795) / 30 (760)	20 ½ (515) / 19 (485)	

SUMP DATA inches (mm) Capacity to Min. Operating

Capacity

gal (ltr)

ELECTRICAL DATA				
Component Specification		Requirement		

WIDTH @ centerline

51 3/4 (1315) 43 (1090)

Тор

Bottom

PLUMBING DIMENSIONS inches (mm)

Α	В	Drain to Overflow	Drain Diameter / Clearance
2 1/4 (55)	9 % (240)	13 % (345)	2 (50) / 1 1/4 (30)

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) $16 \times 16 (405 \times 405)$ minimum access required at pump/blower location(s).

DEPTH @ centerline

Тор

24 1/4 (615)

Bottom

20 % (530)