

6030AIS – BUILDERS' CHOICE

inches (mm)

60 x 30 x 17 (1525 x 760 x 430) • Fax on Demand #5110

SOAKER MODEL #6030AIS



FEATURES

- Alcove bath
- Integral skirt
- Slip-resistant floor
- Pre-leveled base
- Lucite® cast acrylic surface
- Limited 10-year warranty
- UL and IAPMO listed

OPTIONS

- Comfort pillow:
Biscuit, Black, White
- Cable drive waste & overflow:
Chrome, Oil Rubbed Bronze,
Polished Brass, Brushed Nickel,
Color Matched (Biscuit, Bone, White)
- Designer drain, waste & overflow:
Bone, Brushed Nickel, Polished
Brass, Polished Chrome, White

AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand

COLOR & TRIM OPTIONS

Stock



Almond (C)
Bone (C)
Biscuit (C)
White (C)

C = Color Matched Trim



6030AIS

60 x 30 x 17 (1525 x 760 x 430)
inches (mm)

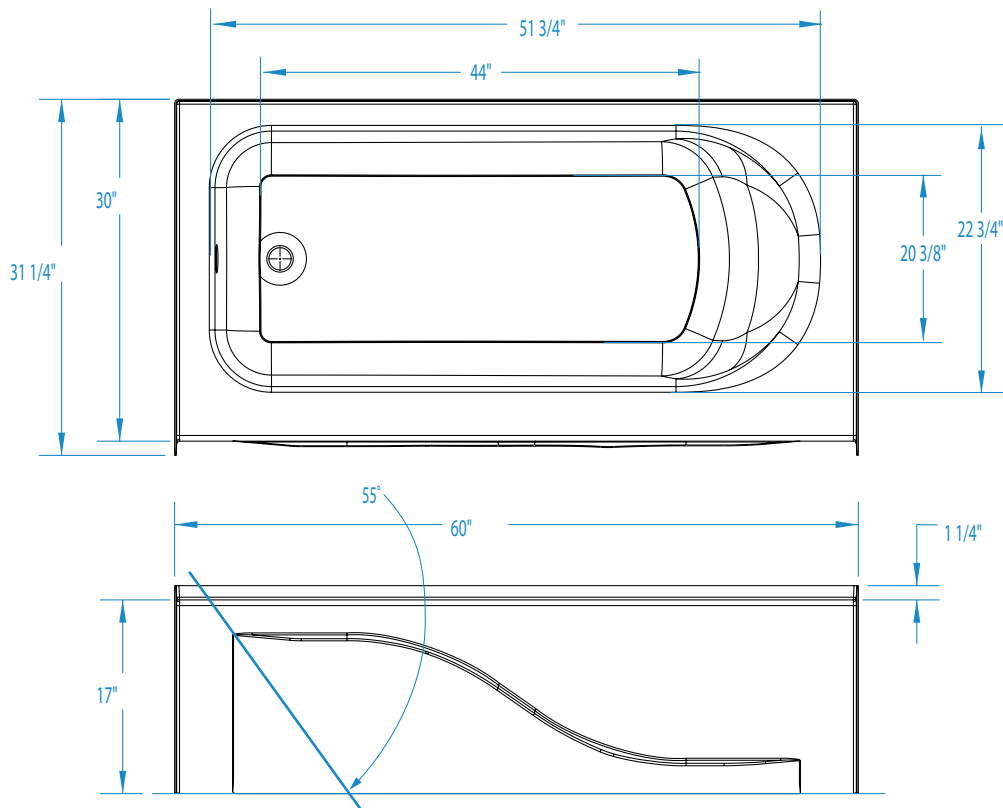

FEATURES lbs (kg) Dimensional Tolerance $\pm 3/8"$. Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Jets	Pump	Air System	Heater	Controls	Drain	Pkg. Wt.
Soaker #6030AIS	Acrylic	0	—	—	—	—	LH or RH	75 (34)

DIMENSIONS inches (mm)

Width Overall / Net	Depth Overall / Net	Height Overall / Net	Skirt Height
60 (1525)	31 1/4 (795) / 30 (760)	18 1/4 (465) / 17 (430)	17 (430)

SUMP DATA inches (mm)

Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
53 (200)	—	51 3/4 (1315)	44 (120)	22 3/4 (575)	20 3/8 (515)

PLUMBING DIMENSIONS inches (mm)

A	B	Drain to Overflow	Drain Diameter / Clearance
2 1/4 (55)	11 3/4 (300)	10 3/4 (275)	2 (50) / 1 1/4 (30)

NOTES:

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 16 (405 x 405) minimum access required at pump/blower location(s).