

### **FEATURES**


- ¼ turn washerless ceramic disc valve cartridges
- Flexible hose connection for 8" to 16" spread installations
- Flow rate 1.5 gpm (5.7 lpm) maximum flow rate
- Solid brass construction
- Listed by IAPMO, CSA, NSF, and other municipalities

- Warranty:
  - Limited lifetime warranty (residential use)
  - One year (commercial use)
- Shipping weight (lbs.) 10
- Shipping dimensions (in.): 29x12x4




r H




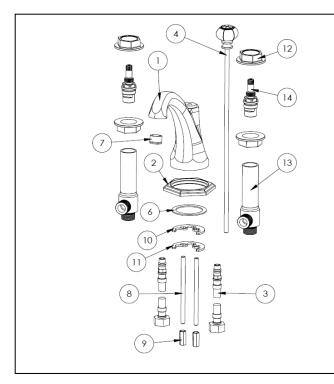


ITEM NO.	PART NUMBER	QTY.
1	205-2-SPT-2	1
2	XX-ESC-RING	1
3	SPPLY-HOSE-0.5-14- NPS	2
4	501-LIFT-ROD-2	1
6	D1R233N-2	1
7	43.6256.010	1
8	SPT-MNTNG-KIT-1- SCRW	2
9	SPT-MNTNG-KIT-1-NUT	2
10	SPT-MNTNG-KIT-2- RBBR-WSHR	1
11	spt-mntng-kit-2- Wshr	1
12	142-LOCK-NUT	4
13H/13C	SS-502 Valve Body	2
14H/14C	SS-502 Cartridge	2

#### HANDLE TRIMS

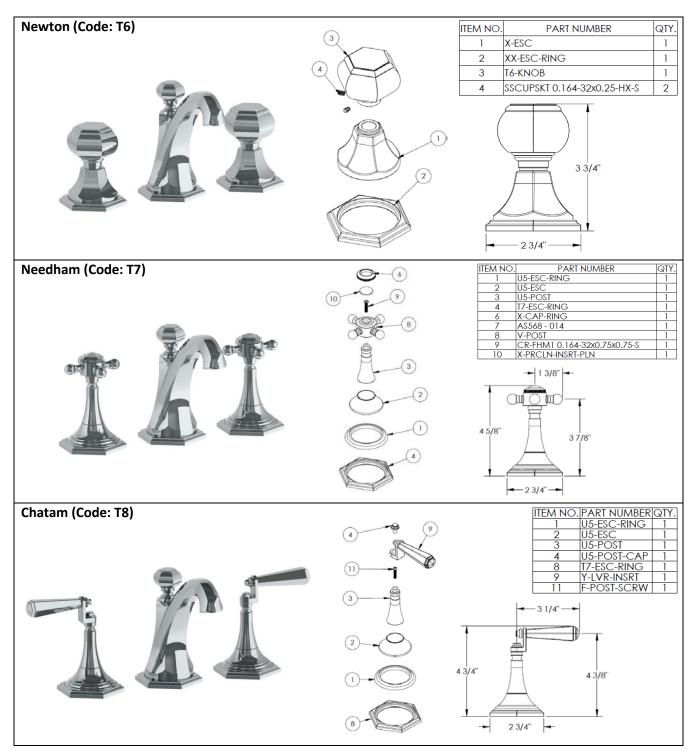

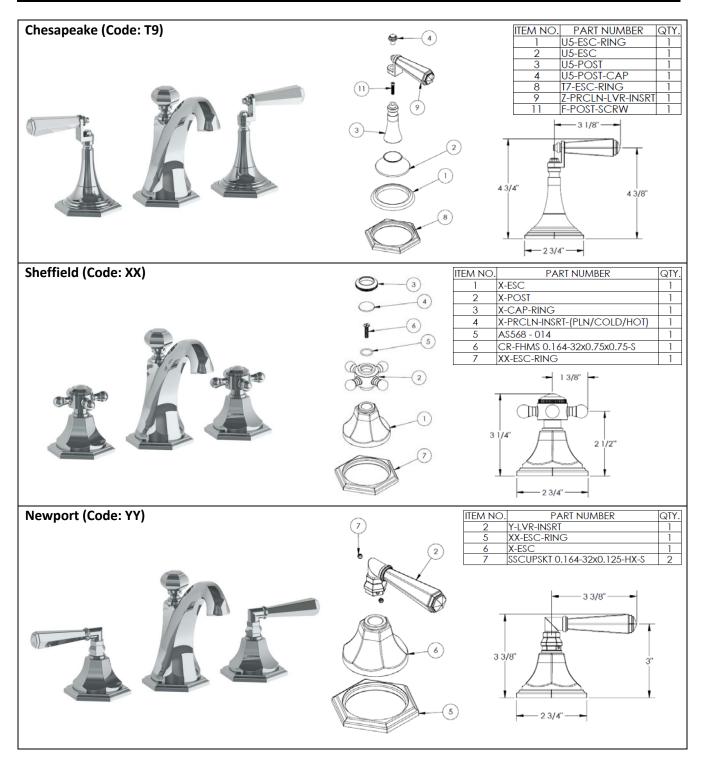

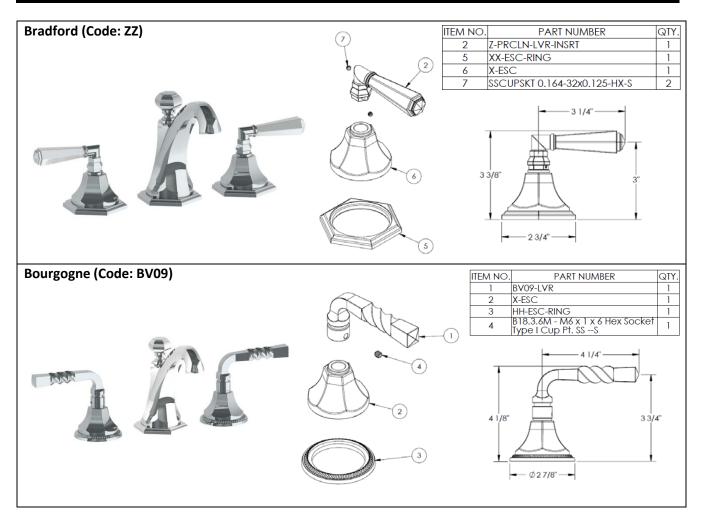

#### **IMPORTANT INSTALLATION INFORMATION**

- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING Overheating may cause damage to internal mechanism
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

For technical support, please call 718-257-2800

Rev. 1/1