

### **FEATURES**

- ¼ turn washerless ceramic disc valve cartridges
- Flexible hose connection for 8" to 16" spread installations
- Flow rate 1.5 gpm (5.7 lpm) maximum flow rate
- Solid brass construction
- Listed by IAPMO, CSA, NSF, and other municipalities


- Warranty:
  - Limited lifetime warranty (residential use)
  - One year (commercial use)
- Shipping weight (lbs.) 10
- Shipping dimensions (in.): 29x12x4







	ITEM NO.	PART NUMBER	QTY.
	1	SPT-MNTNG-KIT-2- WSHR	1
	2	SPT-MNTNG-KIT-2- RBBR-WSHR	1
	3	SPT-MNTNG-KIT-1- SCRW	2
	4	spt-mntng-kit-1-nut	2
	7	AS568 - 226	1
	8	311-2-BASE-RING	1
	9	311-2-LIFT KNOB AND ROD	1
	10	502-AERTR-SHLL	1
	11	PCA Perlator Reg	1
	12	311-2-SPT-2H	1
	13	502-AERTR-GSKT	1
	14	142-LOCK-NUT	4
	15H/15C	SS-502 Valve Body	2
	16H/16C	SS-502 Cartridge	2
	17	SPPLY-HOSE-0.5-14- NPS	2


### HANDLE TRIMS

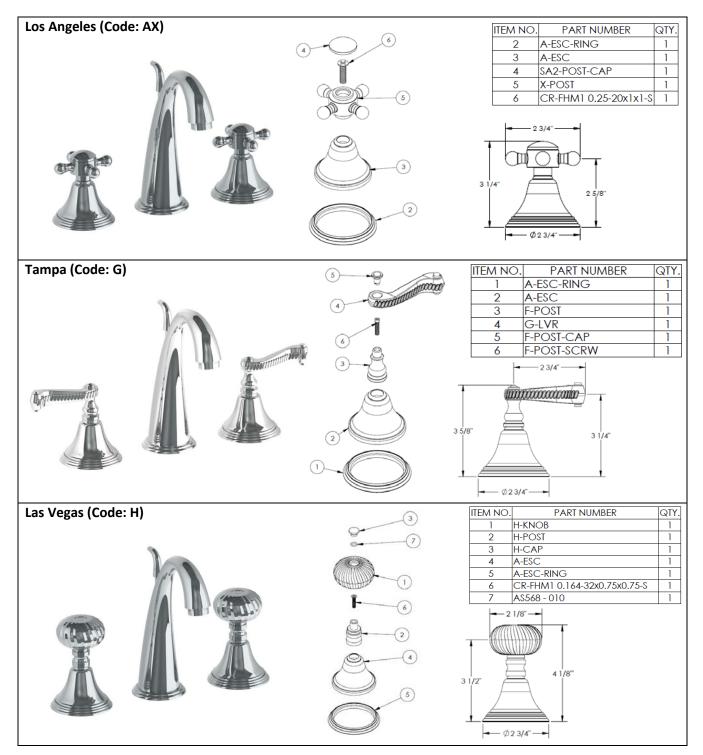

### Hampton Widespread Lavatory Set

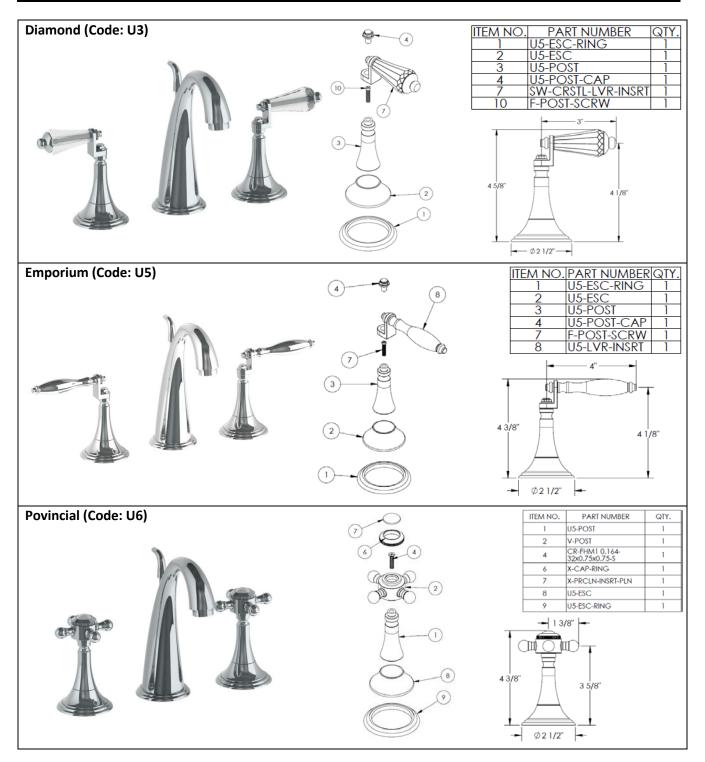

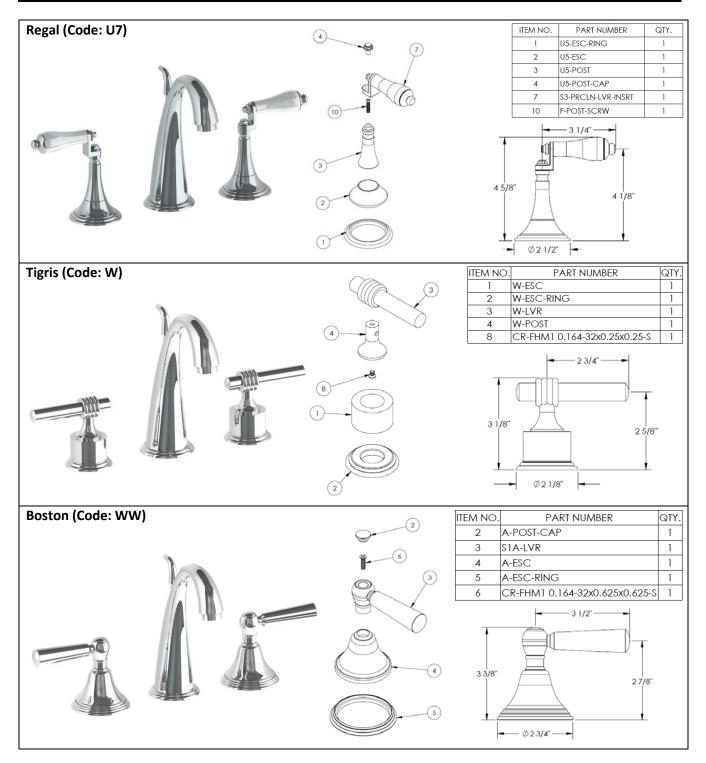

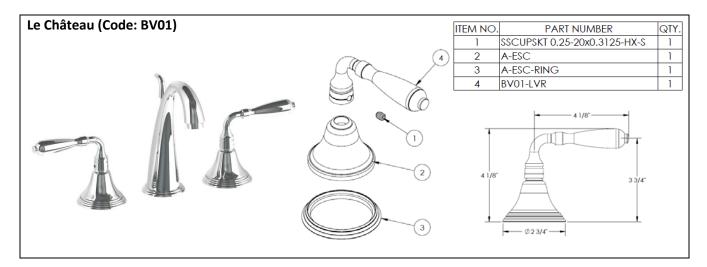

#### **IMPORTANT INSTALLATION INFORMATION**

- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS
- This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING Overheating may cause damage to internal mechanism
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

### For technical support, please call 718-257-2800

Rev. 1/1