

SS-PB50


1/2" Remote Pressure Balance Valve (Anti-scalding)

New York state - building code requirement


Note: To protect from pressure surges and pressure loss - which can cause fluctuations in hot/cold water delivery.

Note: Check valves (not supplied) need to be installed at the inlets of this valve to prevent potential cross connection.

Caution: Some plumbing codes may require hot water not to exceed 120°F.

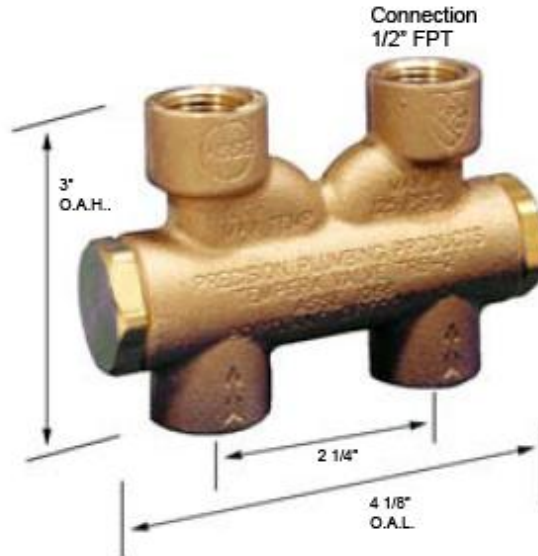

Flow Rate vs. Inlet Pressure

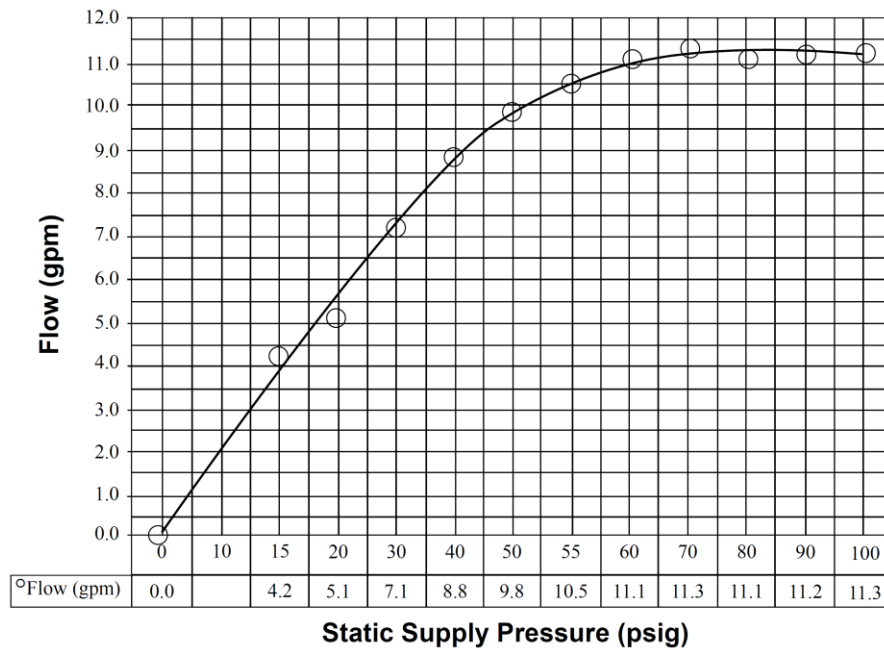

WATERMARK DESIGNS

350 Dewitt Avenue Brooklyn NY 11207 USA T 718 257 2800 F 718 257 2144 info@watermark-designs.com