Rowan[™] Close Coupled Toilet, 1.6GPF

FEATURES

- Gravity flushing system, low consumption (1.6GPF/6.0LPF)
- Round bowl
- Universal Height
- Close coupled, round front bowl and tank set, less toilet seat
- Chrome trip lever
- 12" Rough-in

MODELS

CST405F

COMPONENTS

- C405F Round Front Bowl
- ST406 Tank and Cover only
- SS113 SoftClose® seat (sold separately)

COLORS/FINISHES

 Standard #01 Cotton #03 Bone #11 Colonial White #12 Sedona Beige

PRODUCT SPECIFICATION

The two-piece, universal height, low consumption Gravity flushing system toilet shall be 1.6GPF. Toilet shall have high-profile tank, round front bowl and chrome trip lever. Toilet shall be TOTO Model CST405F____.



CODES/STANDARDS

- Meets or exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance



Rowan™ Close Coupled Toilet, 1.6GPF

SPECIFICATIONS

• Water Use 1.6 GPF (6.0 LPF)

Flush System Gravity
Min. Water Pressure 8 psi (flowing)
Water Surface 7-3/8" x 9-3/8"

Trap Diameter 1-7/8"Rough-in 12"Trap Seal 2"

• Warranty One Year Limited Warranty

 Material Vitreous china
 Shipping Weight C405F - 47lbs ST406 - 35lbs


Shipping Dimensions C405F - 26-1/2" x 16" x 17"


ST406 - 20-1/2" X 8" X 18-3/4"

INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

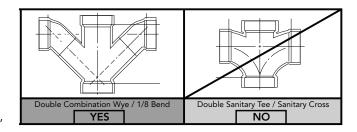

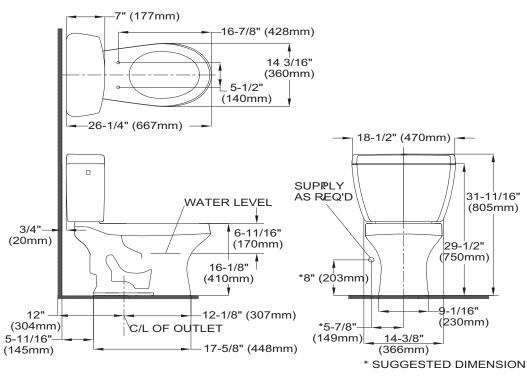

TOTO_®

These dimensions and specifications are subject to change without notice