Classic Series Aero Rain Shower

FEATURES

- Air injected and pulsating AeroJet+™ Technology
- 2.5 gpm (9.5 lpm) maximum flow rate
- 12" diameter spray face
- Rubber nozzles to prevent lime scale build up



COLORS/FINISHES

#CP Polished Chrome #BN Brushed Nickel #PN Polished Nickel

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



PRODUCT SPECIFICATION

The show shall have air injected and pulsating Aero-Jet+ technology. Product shall have 2.5 gpm (9.5 lpm) max flow rate. Product shall have 12" diameter spray face. Product shall have rubber nozzles to prevent lime scale build up. Product shall be TOTO Model TS112B12#_____.

Please note the following required components are sold separately:



TS110MW16 Shower Arm Wall Mount



TS110MC6 Shower Arm Ceiling Mount

Classic Series Aero Rain Shower

SPECIFICATIONS

Warranty Lifetime Limited Warranty

(Residential Use)


One Year (Commercial Use)

Material Brass

Shipping Weight 8.2 lbs.

Shipping Dimensions 13-1/8" x 14-1/8" x 4-1/4"

Maximum Flow Rate 2.5 gpm (9.5 lpm)

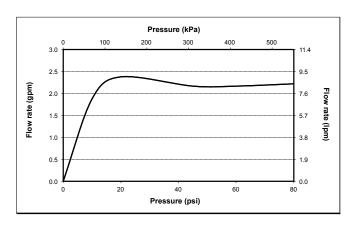

INSTALLATION NOTES

Required Components:

- TS110MW16* (Wall Mount Shower Arm)
- -TS110MC6* (Ceiling Mount Shower Arm)

*These components are compatible with the following TOTO rain shower products only: TS111B8, TS111BL8, TS111B12, TS111BL12, TS112B8, TS112BL8, TS112B12, TS112BL12

