

## Guinevere® Thermostatic Mixing Valve with Two-Way Volume Control Trim

### FEATURES

- Temperature control trim with anti-scald safety stop at 108°F
- For use with the SMA thermostatic mixing valve (TSTD or TSTD R)

### COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel
- #RB Oil Rubbed Bronze

### CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1, ASSE 1016
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



### PRODUCT SPECIFICATION

Thermostatic mixing valve shall include mixing handle and separate two-way volume control trim. Product shall have a temperature control trim with anti-scald safety stop at 108°F. Product shall be TOTO Model TS970D#\_\_\_\_\_ and required SMA thermostatic mixing valve shall be TSTD/TSTD R.

# TS970D

## Guinevere® Thermostatic Mixing Valve with Two-Way Volume Control Trim


### SPECIFICATIONS

- Warranty Lifetime Limited Warranty  
(Residential Use)  
One Year (Oil Rubbed Bronze)  
One Year (Commercial Use)
- Material Brass
- Shipping Weight 6.0 lbs.
- Shipping Dimensions 11-3/4" L x 10-3/4" W x  
3-1/2" H

### INSTALLATION NOTES

#### VALVE REQUIRED:

SMA thermostatic mixing valve, model TSTD or TSTD  
sold separately.

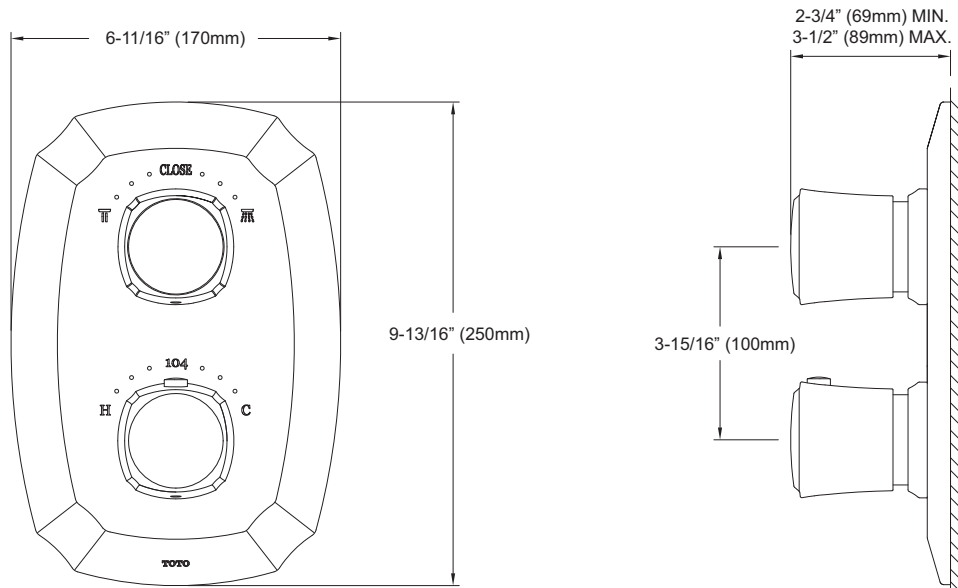

**TOTO®**

*These dimensions and specifications are subject to change without notice*