

FEATURES

- Maximum flow rate of 0.8 gpm (3.0 lpm)
- Rotating head creates a spiral spray for wider coverage
- 4" Cover plate
- Flush mount
- For use with Gyrostream Body Spray Valve (TS1B)

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance



PRODUCT SPECIFICATION

Body spray shall have a maximum flow rate of 0.8 gpm (3.0 lpm). Product shall have a rotating head that creates a spiral spray for wider coverage. Body spray shall have a 4" cover plate and a flush mount. Body spray shall be TOTO Model TS100J#_____ and required valve shall be TS1B sold separately.

TS100J

Gyrostream® Body Spray



SPECIFICATIONS

- Warranty Lifetime Limited Warranty (Residential Use)
One Year (Commercial Use)
- Shipping Weight 2.4 lbs.
- Shipping Dimensions 7-5/8" L x 5-1/8" W x 6-1/2" H
- Maximum Flow Rate 0.8 gpm (3.0 lpm)

INSTALLATION NOTES

VALVE REQUIRED:

Gyrostream body spray valve model TS1B sold separately.

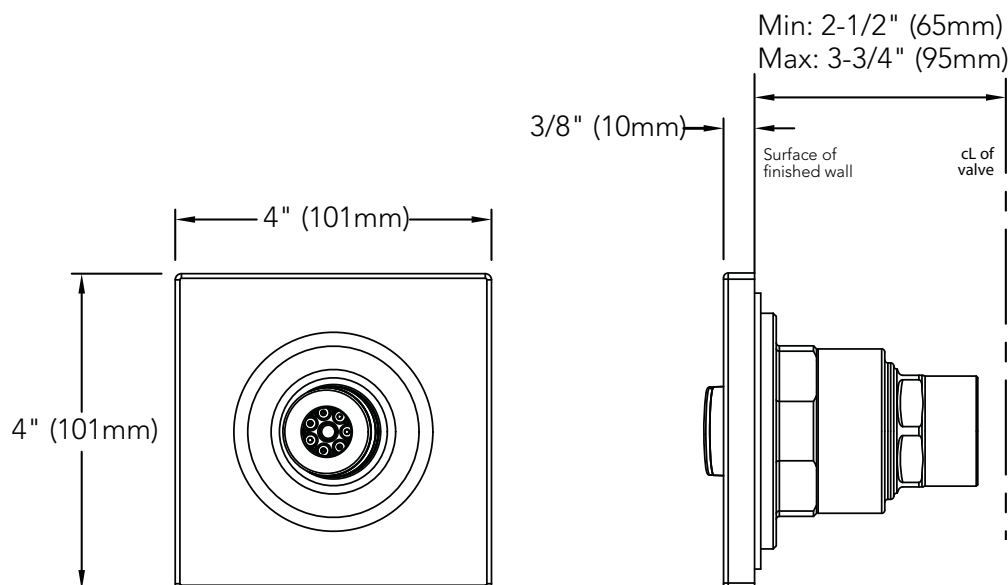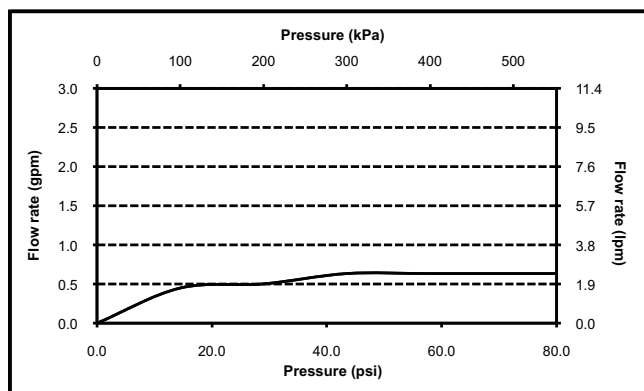

TOTO®

These dimensions and specifications are subject to change without notice