


COLONY® SOFT PRESSURE BALANCE BATH/SHOWER FITTING



T675.502 Bath/Shower Trim Shown

MODEL NUMBER:

TRIM KITS:

- T675.502 Colony Soft BATH/SHOWER Trim Kit Metal Lever Handle. LESS Valve Body.
- T675.501 Colony Soft SHOWER ONLY Trim Kit Metal Lever Handle. LESS Valve Body.
- ☐ T675.500 Colony Soft VALVE ONLY Trim Kit Metal Lever Handle. LESS Valve Body.

For use with R120 Series Pressure Balance Valves. See reverse side for available Rough Valves.

GENERAL DESCRIPTION:

SHOWERHEAD


Single function showerhead at maximum 2.5 gpm/9.5 L/min. flow rate.

WALL TUB SPOUT

Metal slip-on diverter spout.

WALL VALVE TRIM

Available with metal lever handle. Plastic wall escutcheon.

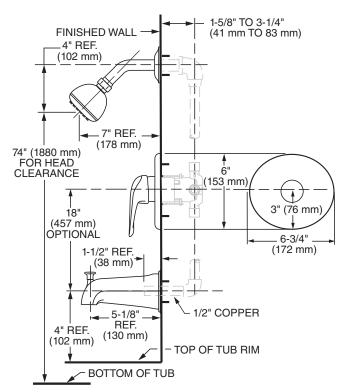

SUGGESTED SPECIFICATION:

Bath/shower fitting shall feature water saving showerhead with Max. 2.5 gpm/9.5 L/min. flow rate. Fitting shall be: American Standard - Trim Kit Model # T675.50_.___. and Valve Body Model # R12_.




COLONY® SOFT PRESSURE BALANCE BATH/SHOWER FITTING


CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A 117.1 ASSE 1016 ASME A112.18.1 CSA B 125.1



*To modify a product, add suffix after the 4th digit (ex. T064ITP502.002)



		* TRIM & ROUGH MUST BE ORDERED SEPARATELY.	Finish Options	
* ST	Product		Polished Chrome	PVD Satin Nickel
¥	Number	Description	002	295
M	T675.502	Bath/Shower Trim Kit. Metal Lever Handle. LESS Valve Body.		
F	T675.501	Shower Only Trim Kit. Metal Lever Handle. LESS Valve Body.		
	T675.500	Valve Only Trim Kit. Metal Lever Handle. LESS Valve Body.		

	Product Number	Description
		•
	R121	Rough Valve Body less trim. Universal inlets/outlets.
ES	R121SS	Rough Valve Body less trim. Universal inlets/outlets with Screwdriver Stops.
٥	R120	Rough Valve Body less trim. Direct Sweat inlets/outlets.
BO	R120SS	Rough Valve Body less trim. Direct Sweat inlets/outlets with Screwdriver Stops.
Æ	R125	Rough Valve Body less trim. Female Thread inlets/outlets.
4	R125SS	Rough Valve Body less trim. Female Thread inlets/outletswith Screwdriver Stops.
\$	R127	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807).
UGH	R127SS	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807) with Screwdriver Stops.
Ö	R128	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960).
ш	R128SS	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960) with Screwdriver Stops.
	R129	Rough Valve Body less trim. CPVC inlets/universal outlets.
	R129SS	Rough Valve Body less trim. CPVC inlets/universal outlets with Screwdriver Stops.

Ŀ	Meets the American Disabilities Act Guidelines and ANSI A117.
CL	Meets the American Disabilities Act Guidelines and ANSI A117. Requirements for the physically challenged.