
American Standard

UPGRADABLE

PRESSURE BALANCE BATH/SHOWER FITTING VOLUME AND TEMPERATURE CONTROL VALVE

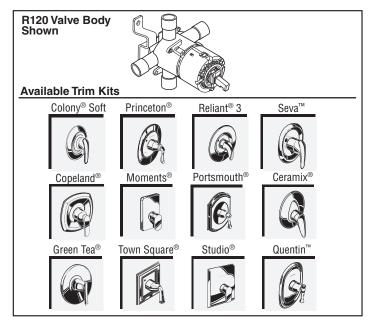

GENERAL DESCRIPTION:

Cast brass body, washerless 47 mm ceramic disc valve cartridge with volume and temperature control, back-to-back capability, integrated check valves, and hot limit safety stop. Pressure balancing cartridge maintains constant output temperature in response to changes in relative hot and cold supply pressure. One-half inch inlets and outlets (choice of universal, direct sweat, threaded, PEX or CPVC). Available with screwdriver stops. Rough-in plaster guard designed for use as thin-wall mounting adaptor. Valve body will accept a variety of decorative Bath/Shower trim kits.

PRODUCT FEATURES:

Cast Brass Valve Body: Durable - Quality that will last a lifetime. Ideal material for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance. Allows easy control over both water temperature and volume.

Pressure Balancing Valve Cartridge: Maintains constant output temperature in response to changes in relative hot and cold supply pressure. Diaphragm system with integrated check valves engineered to eliminate cross flow. Avoids failure due to mineral deposits - ideal for use in hard water.

Back-to-Back Capability: Hot and cold can be reversed quickly and easily.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Exclusive Plaster Guard: Plaster guard is designed to protect valve during installation and serve as a mounting plate for thin-wall installations. Two-piece design allows valve to be tested prior to trim installation.

Wide Rough-in Range: From 1-5/8" to 3-1/4".

MODEL NUMBER:

- R121 Pressure Balance Rough Valve Body only Universal inlets/outlets. LESS trim.
- R121SS Pressure Balance Rough Valve Body only with Screwdriver stops

Universal inlets/outlets. Screwdriver stops. LESS trim.

- R120 Pressure Balance Rough Valve Body only Direct sweat inlets/outlets. LESS trim.
- R120SS Pressure Balance Rough Valve Body only with Screwdriver stops

Direct sweat inlets/outlets. Screwdriver stops. LESS trim.

- ☐ R125 Pressure Balance Rough Valve Body only Female thread inlets/outlets. LESS trim.
- ☐ R125SS Pressure Balance Rough Valve Body only with Screwdriver stops

Female thread inlets/outlets. Screwdriver stops. LESS trim.

- ☐ R127 Pressure Balance Rough Valve Body only PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807). LESS trim.
- R127SS Pressure Balance Rough Valve Body only with Screwdriver stops

PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807). Screwdriver stops. LESS trim.

- R128 Pressure Balance Rough Valve Body only PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960). LESS trim.
- ☐ R128SS Pressure Balance Rough Valve Body only
 PEX inlets/universal outlets for Cold Expansion PEX system
 (ASTM F1960). Screwdriver stops. LESS trim.
- R129 Pressure Balance Rough Valve Body only CPVC inlets/universal outlets. LESS trim.
- R129SS Pressure Balance Rough Valve Body only CPVC inlets/universal outlets. Screwdriver stops. LESS trim.

 See reverse side for dimensional valve drawings.


SUGGESTED SPECIFICATION:

Bath/shower fitting shall feature a cast brass valve body. Shall feature ceramic disc valve cartridge which allows user to control both water temperature and volume. Fitting shall be equipped with pressure balancing cartridge engineered to eliminate cross flow and avoid failure due to mineral deposits. Shall also feature a hot limit safety stop. Fitting shall be: Rough Valve Body - American Standard Model # R12 _____, Trim Kit - American Standard Model # _____. ___.



UPGRADABLE

PRESSURE BALANCE BATH/SHOWER FITTING VOLUME AND TEMPERATURE CONTROL VALVE

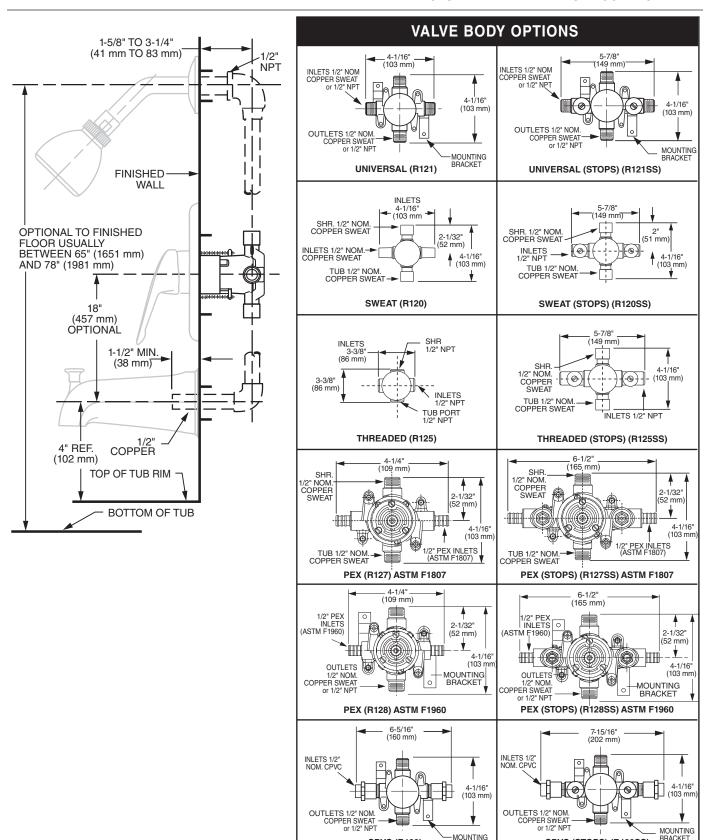

B11

CPVC (R129)

BRACKET

CPVC (STOPS) (R129SS)



UPGRADABLE

PRESSURE BALANCE BATH/SHOWER FITTING VOLUME AND TEMPERATURE CONTROL VALVE

Valve + Trim: Trim Kit & Valve Body Packaged Separately

To order: Specify valve body and


trim kit desired


Example: R120 - Direct Sweat Valve Body

T420.502 - Portsmouth Bath/

Shower Trim Kit

	R121	R121SS	R120	R120SS	R125	R125SS
/ES	Universal Inlets/ Outlets	Universal Inlets/Outlets w/ Screwdriver Stops	Diret Sweat Inlets/ Outlets	Diret Sweat Inlets/Outlets w/ Screwdriver Stops	Female Thread Inlets/ Outlets	Female Thread Inlets/Outlets w/ Screwdriver Stops
VALVES						
	R127	R127SS	R128	R128SS	R129	R129SS
	PEX Inlets/ Universal Outlets (ASTM F1807)	PEX Inlets/Universal Outlets w/ Screwdriver Stops (ASTM F1807)	PEX Inlets/ Universal Outlets (ASTM F 1960)	PEX Inlets/Universal Outlets w/ Screwdriver Stops (ASTM F 1960)	CPVC Inlets/ Universal Outlets	CPVC Inlets/Universal Outlets w/ Screwdriver Stops

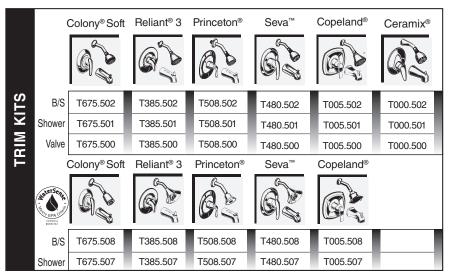



CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A 117.1 ASSE 1016 ASME A112.18.1 CSA B 125

		Moments®			Green Tea®	Town Square®		Quentin®
	B/S	T506.502			T010.502	T555.522		T440.502
KITS	Shower	T506.501			T010.501	T555.521		T440.501
¥	Valve	T506.500			T010.500	T555.520		T440.500
TRIM		Moments®	Portsmouth®	Portsmouth®	Green Tea®	Town Square®	Studio®	Quentin®
F	LE CESCARE LE CONTROL OF THE SECOND							G.
	B/S	T506.508	T420.508	T415.508	T010.508	T555.528	T590.508	T440.508
	Shower	T506.507	T420.507	T415.507	T010.507	T555.527	T590.507	T440.507
	Valve		T420.500	T415.500			T590.500	



Trim Kits for R120, R120SS, R125, R125SS, R127, R127SS rough valve bodies.

Trim Kit	Model # / Description	Finishes	Roughing-In Dimensions
COLONY® SOFT	T675.502 BATH/SHOWER Trim Kit Metal lever handle "Easy Clean" showerhead Shower arm and flange Metal slip-on diverter tub spout T675.501 SHOWER ONLY Trim Kit Metal lever handle "Easy Clean" showerhead Shower arm and flange T675.500 VALVE ONLY Trim Kit Metal Lever handle 2.5 gpm/9.5 L/min. maximum	.002 Polished Chrome .295 Satin Nickel (PVD)	FINISHED WALL 4' REF. (102 mm) 74' FOR HEAD CLEARANCE (188 mm) OPTIONAL (38 mm) 4' REF. (102 mm) (130 mm) 18' (172 mm) 18' (172 mm) 18' (172 mm) 19' 10' 10' 10' 10' 10' 10' 10'
COLONY® SOFT	flow rate T675.508 BATH/SHOWER Trim Kit Metal lever handle Water Saving FloWise® showerhead Turbine spray - 1.5gpm max. flow Angle adjustable Showerhead, arm and flange Metal slip-on diverter tub spout T675.507 SHOWER ONLY Trim Kit Metal lever handle Water Saving FloWise showerhead Turbine spray - 1.5gpm max. flow Angle adjustable Showerhead, arm and flange 1.5 gpm/5.7 L/min. maximum flow rate	.002 Polished Chrome .295 Satin Nickel (PVD)	FINISHED WALL 4" REF. (102 mm) 7" REF. (1880 mm) OPTIONAL 1-12" REF. (138 mm) (153 mm) (153 mm) (153 mm) (153 mm) (153 mm) OPTIONAL 1-12" COPPER 102 mm) 103 mm TOP OF TUB RIM
RELIANT® 3	T385.502 BATH/SHOWER Trim Kit Metal wall escutcheon Metal lever handle "Easy Clean" showerhead Shower arm and flange Metal slip-on diverter tub spout T385.501 SHOWER ONLY Trim Kit Metal wall escutcheon Metal lever handle "Easy Clean" showerhead Shower arm and flange T385.500 VALVE ONLY Trim Kit Metal wall escutcheon Metal lever handle 2.5 gpm/9.5 L/min. maximum flow rate	.002 Polished Chrome .295 Satin Nickel (PVD)	4-1-16* TO 3-1/4* (41 mm TO 83 mm) FINISHED WALL 4-1/4* REF. (108 mm) FINISHED WALL 4-1/4* REF. (108 mm) FINISHED WALL 4-1/4* REF. (152 mm) OPTIONAL 4-1-1/2* REF (152 mm) OPTIONAL 1-1/2* REF (102 mm) TOP OFTUB RIM BOTTOM OF TUB
RELIANT® 3	T385.522 BATH/SHOWER Trim Kit Large metal wall escutcheon Metal lever loop handle "Easy Clean" showerhead Shower arm and flange Metal slip-on diverter tub spout 2.5 gpm/9.5 L/min. maximum flow rate	.002 Polished Chrome .295 Satin Nickel (PVD)	1-5/8" TO 3-1/4" (41 mm TO 83 mm) FINISHED WALL 4-1/4" REF. (108 mm) 6" REF. (152 mm) Optional 1-1/2" REF. (1657 mm) Optional 1-1/2" REF. (102 mm) TOP OF TUB RIM BOTTOM OF TUB



Trim Kits for R120, R120SS, R125, R125SS, R127, R127SS rough valve bodies. **TRIM KITS ONLY. VALVE MUST BE ORDERED SEPARATELY.**

Trim Kit	Model # / Description	Finishes	Roughing-In Dimensions
RELIANT® 3	T385.508 BATH/SHOWER Trim Kit Metal wall escutcheon Metal lever handle Water Saving FloWise® showerhead Turbine Spray-1.5gpm max. flow Angle adjustable Shower arm and flange Metal slip-on diverter tub spout T385.507 SHOWER ONLY Trim Kit Metal wall escutcheon Metal lever handle Water Saving FloWise® showerhead Turbine Spray-1.5gpm max. flow Angle adjustable Shower arm and flange 1.5 gpm/5.7 L/min. maximum flow rate	.002 Polished Chrome .295 Satin Nickel (PVD)	(41 mm TO 83 mm) FINISHED WALL FINISHED WALL 74' FOR HEAD CLEARANCE (1880 mm) OPTIONAL 1-1/2' REF (192 mm) OPTIONAL 1-1/2' REF (194 mm) TOP OF TUB RIM BOTTOM OF TUB
PRINCETON®	T508.502 BATH/SHOWER Trim Kit Metal Lever Handle Wall escutcheon showerhead, arm and flange Metal slip-on diverter tub spout T508.501 SHOWER ONLY Trim Kit Metal Lever Handle Wall escutcheon Showerhead, arm and flange T508.500 VALVE ONLY Trim Kit Metal Lever Handle Wall escutcheon 2.5 gpm/9.5 L/min. maximum flow rate	.002 Polished Chrome .224 Oil Rubbed Bronze .295 Satin Nickel (PVD)	74" FOR HEAD (158 mm) 11/2 REF (102 mm) 11/2 REF
PRINCETON®	T508.508 BATH/SHOWER Trim Kit • Metal Lever Handle • Wall escutcheon • Water Saving FloWise® s howerhead • Shower arm and flange • Metal slip-on diverter tub spout T508.507 SHOWER ONLY Trim Kit • Metal Lever Handle • Wall escutcheon • Water Saving FloWise® Showerhead • Shower arm and flange 1.5 gpm/5.7 L/min. maximum flow rate	.002 Polished Chrome .224 Oil Rubbed Bronze .295 Satin Nickel (PVD)	4-78° REF. FINISHED (41 mm - 63 mm) 8-1/2° REF. (216 mm) 1-1/2° REF. (217 mm) 1-1/2° REF. (217 mm) 1-1/2° COPPER (102 mm)
SEVA™ SEVA™	T480.502 BATH/SHOWER Trim Kit Brass wall escutcheon Metal Lever handle "Vario" adjustable showerhead Shower arm and flange Metal slip-on Diverter tub spout T480.501 SHOWER ONLY Trim Kit Brass wall escutcheon Metal Lever handle "Vario" adjustable showerhead Shower arm and flange T480.500 VALVE ONLY Trim Kit Brass wall escutcheon Metal Lever handle 2.5 gpm/9.5 L/min. maximum flow rate	.002 Polished Chrome .295 Satin Nickel (PVD)	FINISHED WALL 4° REF. (102 mm) 7° REF. (178 mm) (203 mm) 180 mm) 181 mm) 182 mm) 183 mm) 184 mm TO 83 mm) (41 mm TO 83 mm)



Trim Kits for R120, R120SS, R125, R125SS, R127, R127SS rough valve bodies. TRIM KITS ONLY. VALVE MUST BE ORDERED SEPARATELY.

Tuine 1711	RIM KITS ONLY. VALVE MUST BE ORDERED SEPARATELY.						
Trim Kit	Model # / Description	Finishes	Roughing-In Dimensions				
SEVA TM	T480.508 BATH/SHOWER Trim Kit Brass wall escutcheon Metal lever handle Water Saving FloWise® showerhead Turbine Spray-1.5 gpm max. flow Angle adjustable Shower arm and flange Metal slip-on diverter tub spout T480.507 SHOWER ONLY Trim Kit Metal wall escutcheon Metal lever handle Water Saving FloWise showerhead Turbine Spray-1.5 gpm max. flow Angle adjustable Shower arm and flange 1.5 gpm/5.7 L/min. maximum flow rate	.002 Polished Chrome .295 Satin Nickel (PVD)	FINISHED WALL 41 mm TO 83 mm) 47 REF (102 mm) 78 FOR HEAD (178 mm) OPTIONAL 1-1/2* REF (102 mm) 113 mm) TOP OF TUB RIM BOTTOM OF TUB				
CERAMIX®	T000.502 BATH/SHOWER Trim Kit Brass wall escutcheon Metal lever handle "Vario" adjustable showerhead Cast brass shower arm Cast brass diverter tub spout T000.501 SHOWER ONLY Trim Kit Brass wall escutcheon Metal lever handle "Vario" adjustable showerhead Cast brass shower arm T000.500 VALVE ONLY Trim Kit Brass wall escutcheon Metal lever handle 2.5 gpm/9.5 L/min. maximum flow rate	.002 Polished Chrome Note: Trim kits CANNOT be used with Ceramix spool type valves.	FINISHED WALL 4' REF. (102 mm) 7' REF. (102 mm) 7' REF. (102 mm) 7' REF. (178 mm) 7' REF. (188 mm) 18" (188 mm) 18" (188 mm) 18" (182 mm) 182 mm) 4' REF. (121 mm) 4' REF. (122 mm) 12" COPPER 12" COPPER 10" TOP OF TUB RIM				
PORTSMOUTH®	T420.502 BATH/SHOWER Trim Kit Metal wall escutcheon Metal lever handle Water Saving FloWise 3-function showerhead Metal slip-on diverter tub spout T420.501 SHOWER ONLY Trim Kit Metal wall escutcheon Metal lever handle Water Saving FloWise 3-Ffnction showerhead T420.500 BATH/SHOWER Trim Kit Metal wall escutcheon Metal lever handle 2.0 gpm/7.6 L/min. maximum flow rate	.002 Polished Chrome .224 Oil Rubbed Bronze .295 Satin Nickel (PVD)	4-7/8' 1-5/8' TO 3' 141 mm TO 76 mm) WALL 1-5/8' TO 3' 141 mm TO 76 mm) HEF MWALL 1-1/2' NPT 1-1/2' NPT PRINCHED FLOOR USUALLY BETWEEN 65' AND 76' (1851 mm AND 1881 mm) 18' OPTIONAL (457 mm) 18' OPTIONAL (457 mm) 18' OPTIONAL (457 mm) 19' TOP OF TUB RIM BOTTOM OF TUB				
PORTSMOUTH®	T415.502 BATH/SHOWER Trim Kit Decorative square wall escutcheon Metal lever handle Water Saving FloWise 3-function showerhead Metal slip-on diverter tub spout T415.501 SHOWER ONLY Trim Kit Decorative square wall escutcheon Metal lever handle Water Saving FloWise 3-function showerhead T415.500 BATH/SHOWER Trim Kit Decorative square wall escutcheon Metal lever handle 2.0 gpm/7.6 L/min. maximum flow rate	.002 Polished Chrome .224 Oil Rubbed Bronze .295 Satin Nickel (PVD)	4-7/8" FINSHED 1-5/8" TO 3" (125 mm) WALL 12" NPT REF WALL 125 mm) WALL 12" NPT OPTIONAL TO FINSHED FLOOR (185 mm) MAU 1881 mm) 18" OPTIONAL (457 mm) 1-1/2" REF (130 mm) 18" OPTIONAL (457 mm) 1-1/2" REF (130 mm) TOPTIONAL (457 mm) 1-1/2" REF (130 mm) OPTIONAL (457 mm) 1-1/2" REF (130 mm) TOPTIONAL (457 mm) 1-1/2" REF (130 mm) OPTIONAL (457 mm) 1-1/2" REF (130 mm) TOPTIONAL (457 mm) 1-1/2" REF (130 mm) OPTIONAL (457 mm) 1-1/2" REF (130 mm)				



Trim Kits for R120, R120SS, R125, R125SS, R127, R127SS rough valve bodies. TRIM KITS ONLY. VALVE MUST BE ORDERED SEPARATELY.

Trim Kit	Model # / Description	Finishes	Roughing-In Dimensions
COPELAND®	T005.502 BATH/SHOWER Trim Kit Metal lever handle Metal wall escutcheon Metal slip-on diverter tub spout	.002 Polished Chrome .224 Oil Rubbed Bronze .295 Satin Nickel (PVD)	FINISHED WALL 1-5.68* TO 3* (41 mm TO 76 mm)
	T005.501 SHOWER ONLY Trim Kit Metal lever handle Metal wall escutcheon		6° (152mm) REF (1980 mm) FOR HEAD (1914 mm)
	T005.500 VALVE ONLY Trim Kit • Metal lever handle • Metal wall escutcheo		(457 mm) OPTIONAL (38 mm)
E	2.5 gpm /9.5 L/min. maximum flow rate		4* 4-7/8* 1/2* 1/2* (102 mm) (124mm) REF COPPER TOP OF TUB RIM
COPELAND®	T005.508 BATH/SHOWER Trim Kit • Metal wall escutcheon • Metal lever handle • Water Saving FloWise® 3-function showerhead • Metal slip-on diverter tub spout T005.507 BATH/SHOWER Trim Kit	.002 Polished Chrome .224 Oil Rubbed Bronze .295 Satin Nickel (PVD)	15.88" TO 2" 15.88" TO 2" 15.88" TO 2" 17.88" TO 2" 17.8
OREEN CAREEN	Metal wall escutcheon Metal lever handle Water Saving FloWise® 3-function showerhead		74 FOR HEAD CLEARANCE (1880 mm) 18° OPTIONAL (457 mm) REF. (38 mm) REF. (22° COPPER (124 mm) REF. (24 mm) REF. (74 mm) REF. (74 mm) REF. (74 mm) REF. (75 R) SLIP-ON (102 mm) REF. (105 R) SLIP-ON (1
	2.0 gpm/7.6 L/min. maximum flow rate		TOP OF TUB RIM BOTTOM OF TUB
MOMENTS®	T506.502 BATH/SHOWER Trim Kit Brass wall escutcheon Adjustable 3-function showerhead Brass slip-on diverter tub spout T506.501 SHOWER ONLY Trim Kit Brass wall escutcheon Adjustable 3-function showerhead	.002 Polished Chrome	FINISHED WALL 3/4" TO 2-3/8" (19 mm TO 60 mm) 5-5/8" REF. (143 mm) (80 mm) HEAD CLEARANCE (1880 mm) (215 mm) REF. (457 mm)
	T506.500 VALVE ONLY Trim Kit • Brass wall escutcheon		OPTIONAL 12" REF. 12" COPPER (102 mm) - (6.1/2" 1/2" COPPER
E	2.5 gpm/9.5 L/min. maximum flow rate		BOTTOM OF TUB
MOMENTS®	T506.508 BATH/SHOWER Trim Kit Brass wall escutcheon Water Saving FloWise 3-function showerhead Brass slip-on diverter tub spout	.002 Polished Chrome	FINISHED WALL -1-1/4* (32 mm) DIA HOLE 1/2* NPT 4-7/8* (124 mm) HEF. 4-3/4* 4-3/
GREEN GREEN	T506.507 SHOWER ONLY Trim Kit Brass wall escutcheon Water Saving FloWise 3-function showerhead		1/22 mm) 1/24 mm) 1/24 mm) 1/24 mm
E United	2.0 gpm/7.6 L/min. maximum flow rate		BOTTOM OF TUB



Trim Kits for R120, R120SS, R125, R125SS, R127, R127SS rough valve bodies.

RIM KITS ONLY. VALVE MUST BE ORDERED SEPARATELY.						
Trim Kit	Model # / Description	Finishes	Roughing-In Dimensions			
GREEN TEA®	T010.502 BATH/SHOWER Trim Kit Metal wall escutcheon 6 3/4" Rain showerhead 12" Brass shower arm Metal slip-on diverter tub spout Metal lever handle T010.501 SHOWER ONLY Trim Kit Metal wall escutcheon 6 3/4" Rain showerhead 12" Brass shower arm Metal lever handle T010.500 VALVE ONLY Trim Kit Metal wall escutcheon Metal lever handle 2.5 gpm/9.5 L/min. maximum flow rate	.002 Polished Chrome .075 Stainless Steel (PVD)	FINISHED WALL 5' (127 mm) REF. 12.14' 2.14' 305 mm 12') REF. 74' (1820 mm) FOR HEAD OPTIONAL (177 mm) FOR HEAD OPTIONAL 18' 18' 19' 19' 19' 19' 19' 19'			
GREEN TEA®	T555.522 BATH/SHOWER Trim Kit Metal wall escutcheon Metal lever handle Water Saving FloWise® 3-function showerhead Metal slip-on diverter tub spout T555.521 SHOWER ONLY Trim Kit Metal wall escutcheon Metal lever handle Water Saving FloWise® 3-function showerhead	.002 Polished Chrome	## 1/2" NPT 1/2" NPT			
TOWN SQUARE®	T555.522 BATH/SHOWER Trim Kit Metal wall escutcheon Metal lever handle Cast brass shower arm 4-1/2" Rain showerhead Metal slip-on diverter tub spout T555.521 SHOWER ONLY Trim Kit Metal wall escutcheon Metal lever handle Cast brass shower arm 4-1/2" Rain showerhead T555.520 VALVE ONLY Trim Kit Metal wall escutcheon Metal lever handle	.002 Polished Chrome .224 Oil Rubbed Bronze .295 Satin Nickel (PVD)	FINISHED WALL 158' TO 3' (41 mm TO 76 mm) 12' I.P.S. (25 mm) REE. 12' I.P.S. 12' I.P.S. 12' I.P.S. 12' I.P.S. 18' FOR HEAD (203 mm) REF. CLEARANCE (1880 mm) 18' OPTIONAL 18' OPTIONAL 18' TOP OF TUB RIM BOTTOM OF TUB			
TOWN SQUARE®	T555.528 BATH/SHOWER Trim Kit Metal wall escutcheon Metal lever handle Cast brass shower arm Water Saving FloWise 3-function showerhead Metal slip-on diverter tub spout T555.527 SHOWER ONLY Trim Kit Metal wall escutcheon Metal lever handle Cast brass shower arm Water Saving FloWise 3-Function showerhead 2.0 gpm/7.6 L/min. maximum flow rate	.002 Polished Chrome .224 Oil Rubbed Bronze .295 Satin Nickel (PVD)	FINISHED WALL 1-5/8* TO 3* (41 mm TO 76 mm) 1/2* I.P.S. 1/2* I.P.S. 1/2* FOR HEAD (216 mm) REF. CLEARANCE (1880 mm) 18* OPTIONAL (457 mm) 7.1/4* REF. (194 mm) 18* OPTIONAL (457 mm) TOP OF TUB RIM BOTTOM OF TUB RIM BOTTOM OF TUB RIM			



Trim Kits for R120, R120SS, R125, R125SS, R127, R127SS rough valve bodies. TRIM KITS ONLY. VALVE MUST BE ORDERED SEPARATELY.

Trim Kit Model # / Description		ELY. Finishes	Roughing-In Dimensions
	woder # / Description	FIIIISHES	noughing-in Dimensions
STUDIO® with FloWise®	T590.508 BATH/SHOWER Trim Kit Brass wall escutcheon Metal lever handle Shower arm and flange Water Saving FloWise 3-function showerhead Metal slip-on diverter tub spout T590.507 SHOWER ONLY Trim Kit Brass wall escutcheon Metal Lever Handle Shower arm and flange Water Saving FloWise 3-Function showerhead T590.500 VALVE ONLY Trim Kit Brass wall escutcheon Metal lever handle 2.0 gpm/7.6 L/min. maximum flow rate	.002 Polished Chrome .295 Satin Nickel (PVD)	FINISHED WALL 4.58° TO 3° 4.78° REF (124 mm) (2.38° (60 mm) (127 NPT (127 mm) NPT (127 mm) NPT (128 mm) (128 mm) (210 mm) (25 mm)
QUENTIN™	T440.502 BATH/SHOWER Trim Kit	.002 Polished Chrome	FINISHED WALL → 4 1-5/8° TO 3°
	Brass wall escutcheon Metal lever handle 12" Shower arm and flange 6" Brass rain showerhead Metal slip-on diverter tub spout T440.501 SHOWER ONLY Trim Kit Brass wall escutcheon Metal lever handle 12" Shower arm and flange 6" Brass rain showerhead T440.500 VALVE ONLY Trim Kit Brass wall escutcheon Metal lever handle 2.5 gpm/9.5 L/min. maximum flow rate	.224 Oil Rubbed Bronze .295 Satin Nickel (PVD)	(41 mm TO 76 mm) (152 mm) (166 mm) (152 mm) DIA. (152 mm) DIA. (152 mm) NPT (127 mm) NPT (127 mm) NPT (128 mm) (152 mm) DIA. (152 mm) DIA. (152 mm) DIA. (152 mm) NPT (152 mm) NPT (152 mm) NPT (153 mm) (154 mm) (154 mm) (157 mm) (158 mm) (158 mm) (158 mm) (158 mm) (159 mm)
QUENTIN	T440.508 BATH/SHOWER Trim Kit • Metal wall escutcheon • Metal lever handle • Water Saving FloWise® • 3-function showerhead • Metal slip-on diverter tub spout T440.507 SHOWER ONLY Trim Kit • Metal wall escutcheon • Metal lever handle • Water Saving FloWise® • 3-function showerhead	.002 Polished Chrome .224 Oil Rubbed Bronze .295 Satin Nickel (PVD)	14.7/8" TO 3" 1/4" mm TO 76 mm) 1/2" NPT 1/2" N
GREEN	2.0 gpm/7.6 L/min. maximum flow rate		TOP OF TUB RIM BOTTOM OF TUB