
Submitted Model No.:	
Specific Features:	



▲ Designate proper finish suffix

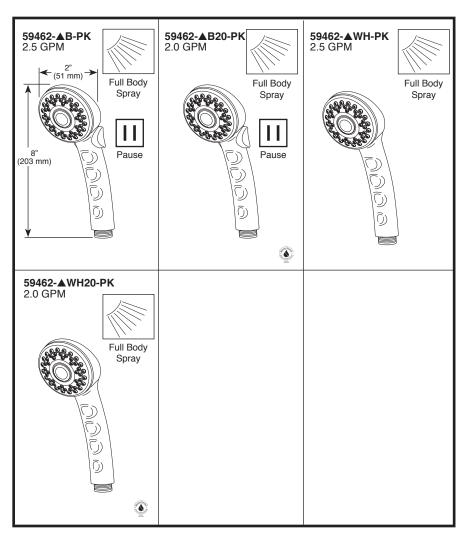

SHOWERS

NO MOUNT

■ Full Spray Handshower

STANDARD SPECIFICATIONS:

- 2.5 gpm @ 80 psi, 9.5 L/min @ 552 kPa
- 2.0 gpm @ 80 psi, 7.6 L/min @ 552 kPa
- Full spray handshower
- Rub-clean nozzles to remove mineral deposits
- Pushbutton reduces water flow to a trickle (59462-▲B-PK & 59462-▲B20-PK)
- Manufactured using engineering grade plastics

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1/CSA B125.1 ◆
 EPA WaterSense® (2.0 GPM only)

Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.