


Submitted Model No.:

Specific Features:

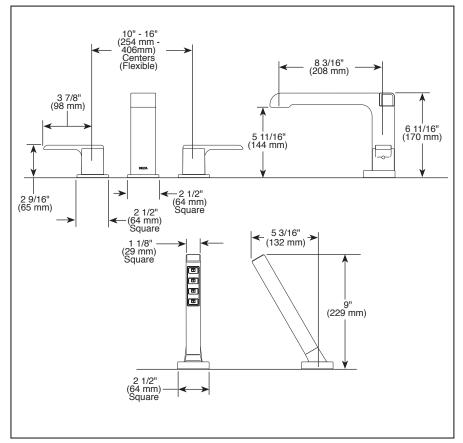

- Designate Proper Finish Suffix
- Your Delta Faucet hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3, CSA B125.1 and ASME A112.18.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

\Lambda DELTA

ROMAN TUB/WHIRLPOOL **FAUCET TRIM**

- Ara[™] Bath Collection
- Three Hole Installation (T2767 Series)
- Four Hole Installation (T4767 Series)
- Rough-In Kit Must Also be Ordered to Complete Installation (R4707 for four hole and R2707 for three hole)

STANDARD SPECIFICATIONS:

- Trim Only for two handle Roman Tub faucet for concealed mounting
- Temperature and volume controlled with handles Red/blue button covers on handle for
- hot/cold identification
- Rough-In kit must also be ordered to complete installation (R4707 for four hole and R2707 for three hole). There are separate specification sheets on each rough-in kit if more details are required.
- Handshower includes double check valves for backflow prevention (T4767).
- H₂Okinetic[®] Handshower water efficient flowrate of 2.00 gốm @ 80 psi, 7.6 L/min @ 550 kPa

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLETE VALVE COMPLIES WITH:

ASME A112.18.1 / CSA B125.1

Indicates compliance to ICC/ANSI A117.1 - Valve control only

- EPA WaterSense® Applies to handshower only -59567*
- Pressure (kPa) 138 207 276 345 414 483 552 69 621 113.6 Flov 94.6 Roman Tub ية 20 75.7 (Liters 15 Callons 10 56.8 Per 10 37.9 S (U.S. ute) 5 Hand Showe 18.9 PIOW 0 0 10 20 30 40 50 60 70 80 on. Pressure (PSI)

FAUCET COMPANY 55 E. 111th Street. Indianapolis. Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2016 Masco Corporation of Indiana