

Highest quality sink formed of #18 (1.2mm) gauge, type 304 (18-8) nickel bearing stainless steel with Perfect Drain. Top mount.

DESIGN FEATURES

Bowl Depth: See Chart on next page.

Coved Corners: 1-3/4" (44mm) vertical and horizontal radius. Rim Height: 5/32"(4mm), or 3/8"(10mm)(LRS3322PD only) Finish: Exposed surfaces are hand polished to a Lustrous

Highlighted Satin finish.

Underside: Fully undercoated to dampen sound and reduce condensation. LR2521PD is fully protected by heavy duty

Sound Guard® undercoating.

Perfect Drain: Seamlessly welded stainless steel collar eliminates the gap between a traditional drain and the sink for a sanitary and gap free installation. Each sink shipped with one LKPD1 drain kit, or a garbage disposer can be installed on sink bowl for user convenience.

Patent Pending


OTHER

Drain opening: 3-3/8" (86mm)


Waste Fitting complies with ASME A112.18.2/CAN/CSA-B125.2 Sink complies with ASME A112.19.3-2008 / CSA B45.4-08.



These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada.




Installation Profile



In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkavusa.com for most current version of Elkav product specification sheets.

Models LR and LRS Series



Model LR2219PD3





Elkay[®] Perfect Drain[™] sinks are designed and approved for compatible disposers manufactured by InSinkErator® utilizing the Quick Lock® mounting configuration. Use of non-approved disposers may void Elkay warranty.

InSinkErator, Quick Lock and the mounting collar configuration are trademarks of Emerson Electric Co.




This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



SINK DIMENSIONS*


	Overall L W D			Inside Bowl			Cutout in Countertop [1 ¹ / ₂ " (38mm) Radius Corners]		No. of 1 ¹ / ₂ " (38mm) Dia. Faucet Holes	Minimum
Model Number	A	B	С	D	W E	D F	L	W	4" (102mm) Center	Cabinet Size
LR1722PD	17 (432mm)	22 (559mm)	91/8 (232mm)	13 ¹ / ₂ (343mm)	16 (406mm)	7 ⁵ / ₈ (194mm)	16 ³ / ₈ (422mm)	21 ³ / ₈ (543mm)	1, 2, MR2, 3, or OS4	21 (533mm)
LR1919PD	19 ¹ / ₂ (495mm)	19 (483mm)	9 (229mm)	16 (406mm)	13 ¹ / ₂ (343mm)	7 ¹ / ₂ (190mm)	18 ⁷ / ₈ (479mm)	18 ³ / ₈ (467mm)	1, 2, MR2, 3, or OS4	24 (610mm)
LR2219PD	22 (559mm)	19 ¹ / ₂ (495mm)	9 ^{1/8} (232mm)	18 (457mm)	14 (356mm)	7 ⁵ / ₈ (194mm)	21 ³ / ₈ (543mm)	18 ⁷ / ₈ (479mm)	1, 2, MR2, 3, 4 or 5	27 (686mm)
LR2521PD	25 (635mm)	21 ¹ / ₄ (540mm)	9 ¹ / ₂ (241mm)	21 (533mm)	15 ³ / ₄ (400mm)	8 (203mm)	24 ³ / ₈ (619mm)	20 ⁵ / ₈ (524mm)	1, 2, MR2, 3, 4 or 5	30 (762mm)
LR3122PD	31 (787mm)	22 (559mm)	9 ¹ / ₈ (232mm)	28 (711mm)	16 (406mm)	7 ⁵ / ₈ (194mm)	30 ³ / ₈ (772mm)	21 ³ / ₈ (543mm)	1, 2, MR2, 3, 4 or 5	36 (914mm)
LRS3322PD	33 (838mm)	22 (559mm)	9 ¹ / ₈ (232mm)	28 (711mm)	16 (406mm)	7 ⁵ / ₈ (194mm)	32 ³ / ₈ (822mm)	21 ³ / ₈ (543mm)	1, 2, MR2, 3, 4 or 5	36 (914mm)

^{*}Length is left to right. Width is front to back.

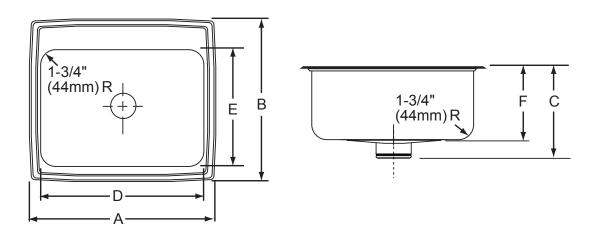

Hole Drilling Configurations

1-1/2" (38mm) Diameter Faucet Holes on 4" (102mm) Centers

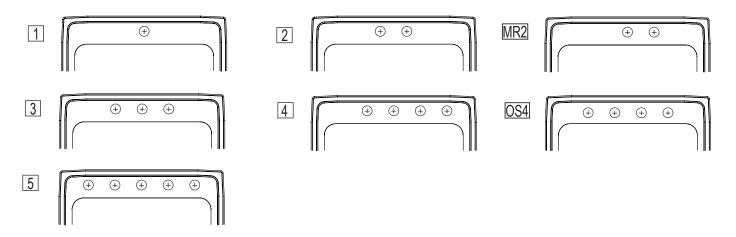

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.