

Pacemaker® Single Bowl Hospitality Sink and Sink Packages

SPECIFICATIONS Models BPSRA150C, BPSH15C, BPSR15 and BPSRQ15

GENERAL

Fine quality sink bowl seamlessly formed of #20 gauge, type 304 (18-8) nickel bearing stainless steel. Top Mount.

DESIGN FEATURES

Bowl Depth: 6-1/8" (156mm).

Coved Corners: 1-3/4" (44mm) vertical and horizontal radius. Rim Height: 3/16" (5 mm) below outside edge of sink. Finish: Exposed surfaces are hand polished to a Bright

Satin finish.

Underside: Fully undercoated to reduce condensation

and dampen sound.

OTHER

Drain Opening: 2" (51mm).

NOTE: BPSH15C is furnished with 3 faucet holes. Sink complies with ASME A112.19.3/ CSA B45.4



Sinks are listed by IAPMO® as meeting the applicable requirements of the Uniform Plumbing Code®, International Plumbing Code®, and National Plumbing Code of Canada.



These sinks are compliant to ADA and ANSI/ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.

SINK PACKAGES

BPSRA150C Package includes:

- (1) BPSR15 Sink.
- (1) **LKD20888C** Deluxe two-handle faucet with 4-1/2" (114mm) rigid goose-neck spout.
- (1) **LK36** Strainer.

BPSH15C Package includes:

- (1) **BPSR15** Sink.
- (1) **LKDA2437C** Hi-Arc® two-handle bar faucet with 9" (229mm) high (deck to aerator height) traditional swing spout.
- (1) LK36 Strainer.

OPTIONAL ACCESSORIES


Bottom Grid: LKWBG1209SS

Cutting Board: CB912

Drain: LK36

Rinsing Basket: LKWRB1209SS

Utensil Caddy for Rinsing Basket: LKWUCSS











SINK DIMENSIONS (INCHES)*

U-Channel Model	Quick-Clip Model	Overall		Inside Bowl			Cutout in Countertop (1-1/2" (38mm) Radius Coners		No. of 1-1/4" (32mm) or 1-1/2" (38mm) Dia. Faucet Holes 4" (102 mm) centers	Minimum Cabinet Size
Number	Number	L	W	L	W	D	L	W	4 (102 min) centers	
BPSRA150C	-	15 (381mm)	15 (381mm)	12 (318mm)	9-1/4 (318mm)	6-1/8 (318mm)	14-3/8 (318mm)	14-3/8 (318mm)	1	18 (457mm)
BPSH15C	-	15 (381mm)	15 (381mm)	12 (318mm)	9-1/4 (318mm)	6-1/8 (318mm)	14-3/8 (318mm)	14-3/8 (318mm)	3	18 (457mm)
BPSR15	BPSRQ15	15 (381mm)	15 (381mm)	12 (318mm)	9-1/4 (318mm)	6-1/8 (318mm)	14-3/8 (318mm)	14-3/8 (318mm)	1, 2, MR2, or 3	18 (457mm)


^{*}Length is left to right. Width is front to back

SEE OTHER SIDE FOR PRODUCT DIMENSIONS.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.


This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



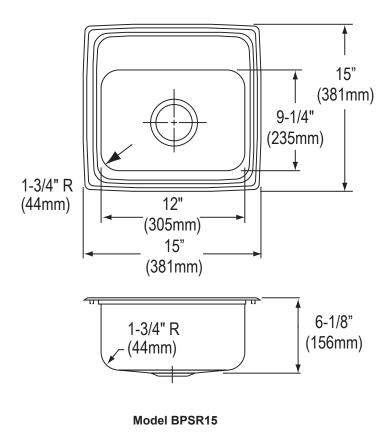


Hole Drilling Configurations

1-1/4" (32mm) Diameter Faucet Holes For 1 and 2 Hole Models 1-1/2" (38mm) Diameter Faucet Holes For 3 Hole Model Faucet Holes on 4" (102 mm) Centers

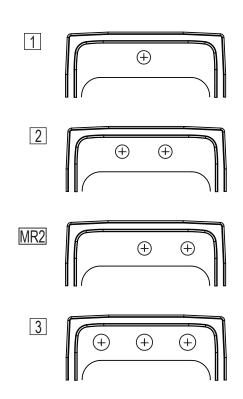


Installation Profile



In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.

Installation Profile Quick-Clip® Mounting System



This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.