

PRODUCT SPECIFICATIONS

Food Service Wall Mount Faucet. Faucet has a flow rate of 1.5 GPM, and is made of Chrome Plated Brass material, with a Quarter Turn Ceramic Disc valve. Faucet requires 2 faucet holes.

Mounting Type:	Wall Mount
Special Features:	Low Flow Solid Brass Construction Spout swing restriction pin
Finish:	Chrome (CR)
Handle Type:	2" Lever Handle
Deck Clearance:	7-11/16"
Spout Reach:	10"
Spout Height:	10-3/16"
Hole Drillings:	2
Material:	Chrome Plated Brass
Valve Type:	Quarter Turn Ceramic Disc
Valve Connection:	Offset Adj 1/2" NPT Female Inl
Flow Rate:	1.5 GPM
Faucet Hole Spread:	8"
Countertop Thickness:	0.0000
Spout Type:	High Arc

Special Note: 1.5 GPM VR aerator installed with 2.2 and .5 GPM inserts included




AMERICAN PRIDE. A LIFETIME TRADITION.
Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.



Product Compliance: ADA & ICC A117.1
ASME A112.18.1/CSA B125.1
NSF 61
NSF 372 (lead free)

[Clean and Care Manual \(PDF\)](#)
[Installation Instructions \(PDF\)](#)
[Limited Warranty \(PDF\)](#)

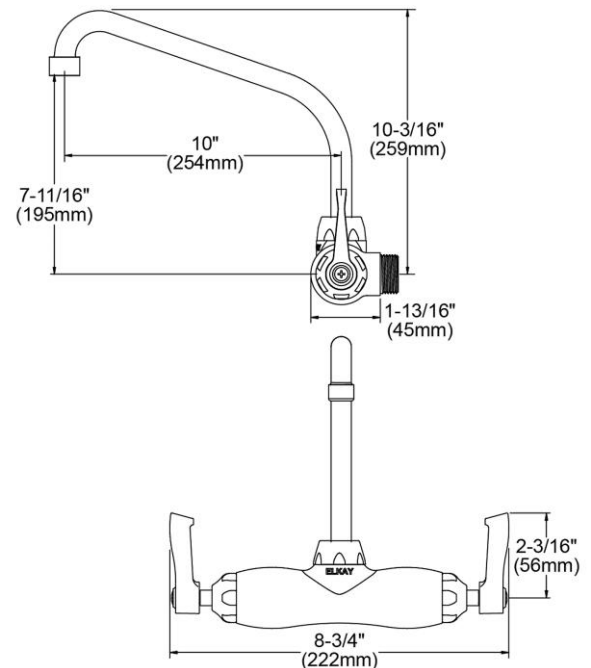

PART: _____ QTY: _____

PROJECT: _____

CONTACT: _____


DATE: _____

NOTES: _____

APPROVAL: _____

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.





ITEM	IND. PART	DESCRIPTION
1	A55445	Spout
2	45918C	Handle, 2"
3	45923C	Right Cold Cartridge
4	45924C	Left Hot Cartridge
5	A55413	2" Adjustable Inlet
6	45913C	Body
7	LK734	2.2 GPM VR Aerator

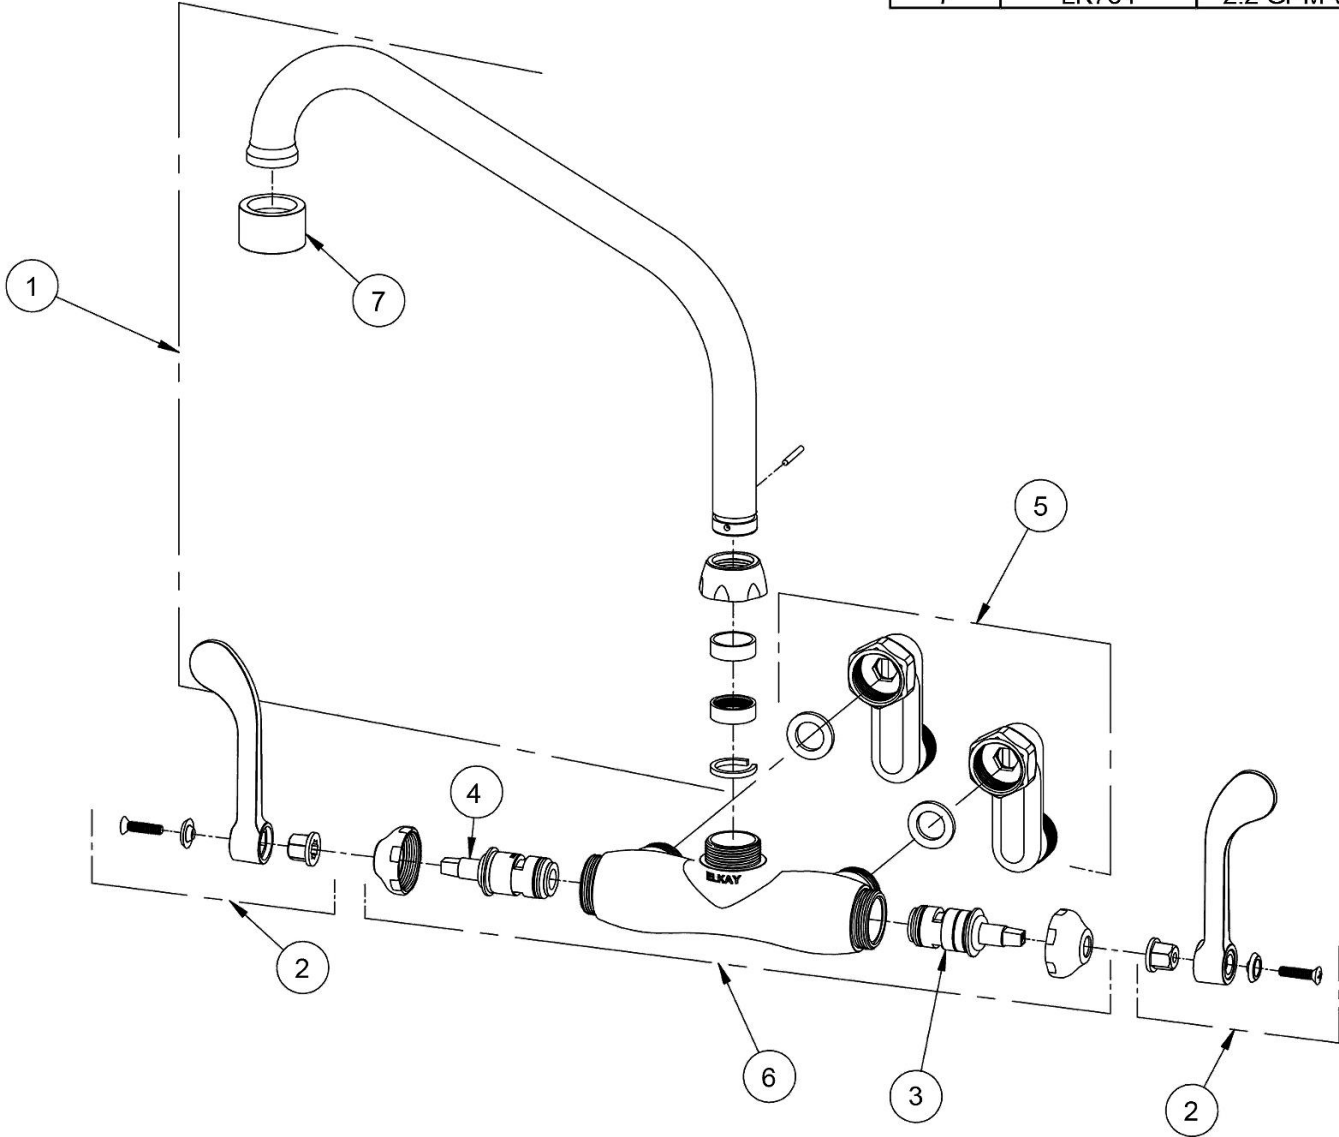

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.


ELKAY®

Installation Instructions for Wall Mount and Deck Mount Faucets

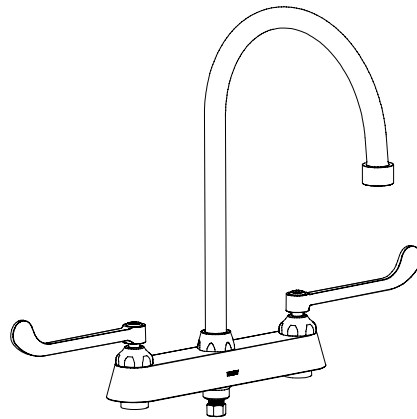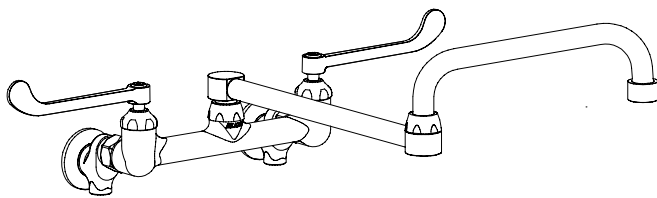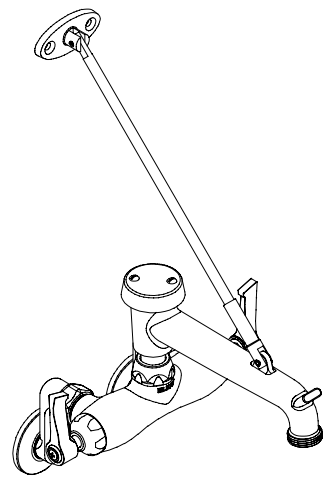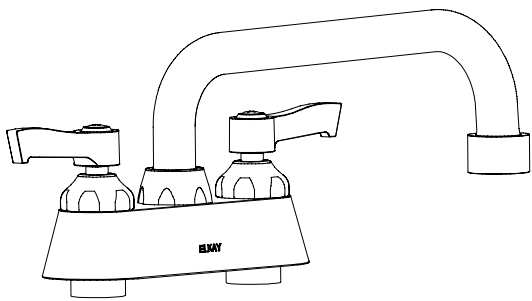


ELKAY ■ 2222 CAMDEN COURT ■ OAK BROOK, IL. 60523 USA

WALL MOUNT ASSEMBLY

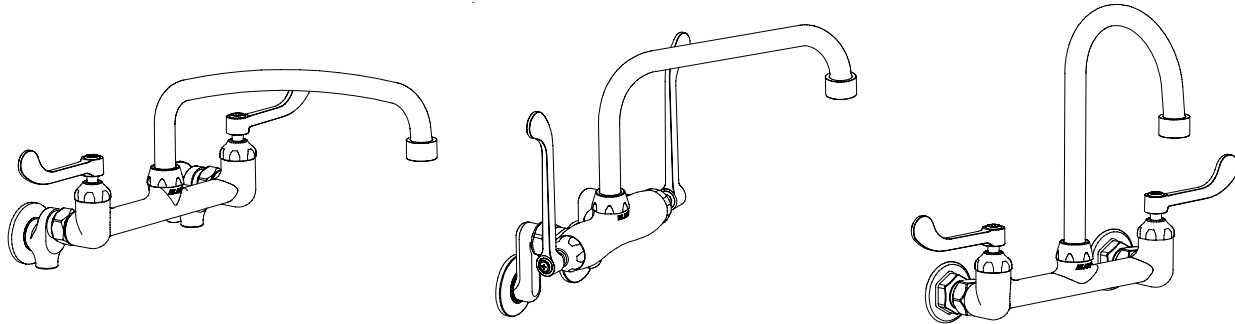


General Instructions

- Turn off the water supply at the main source.
- Hand tighten all parts prior to tightening with wrench. Do not force parts together.
- Handle plated surfaces with care, being careful not to scratch with tools.
- Wall mount faucets have a 1/2" I.P.S. female flanged inlet.
- For easier assembly, you may purchase as an accessory, the LKMK462 mounting kit (see Figure 2).

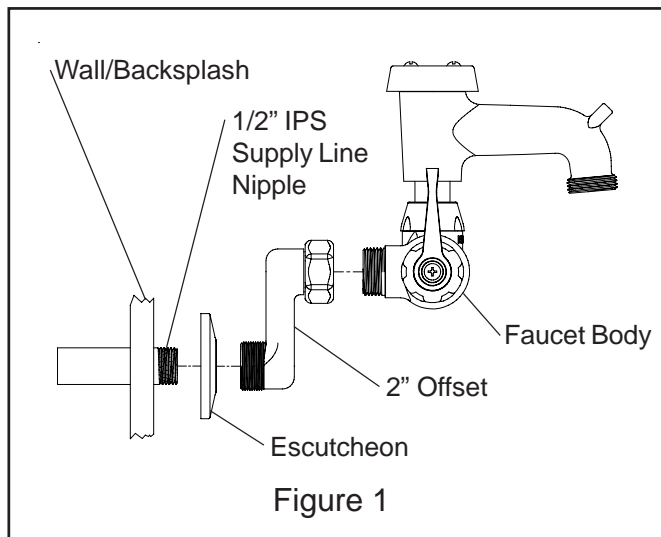

Assemble Faucet to Backsplash




1. Apply teflon tape or pipe joint compound to supply line nipples.
2. Place nipples through holes in backsplash.
3. Assemble each flanged inlet to one nipple, then the other.
4. Using the optional LKMK462, apply in order behind the back-splash: rubber washer, washer, lock nut and elbow (see Figure 2).
5. Thread flanged inlet loosely against wall or backsplash.
6. Carefully orient, mount and hand tighten the faucet to the two flanges. Be sure to include the washers provided.
7. Use wrench to tighten flange against backsplash. (Maintain alignment of faucet or spout to sink while tightening).
8. Wrench tighten flanges to faucet body.
9. Make sure drain is attached and turn on water supply - being sure to check for leaks. Wrench tighten where needed.

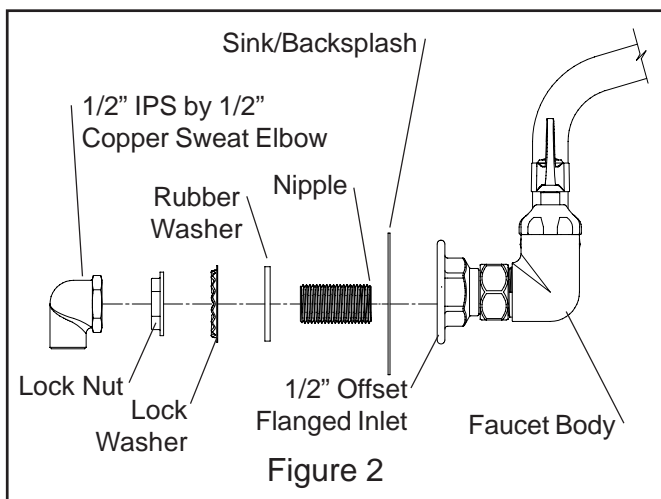

TO FIX SPOUT IN POSITION

1. Prior to spout installation, remove provided lock pin from sealed bag.
2. Place lock pin in the pierced hole at the base of the spout.
3. Align pin with slots in the ring found inside the throat of the spout connection on the faucet body.
4. Tighten spout nut to appropriate torque.

DECK MOUNT ASSEMBLY




General Instructions

- Turn off the water supply at the main source.
- Hand tighten all parts prior to tightening with wrench. Do not force parts together.
- Handle plated surfaces with care, being careful not to scratch with tools.
- All deck mount faucets and spouts come complete with compression nut and one piece nutwasher for ½" O.D. tube.

Assemble Base to Sink Deck

1. Apply Teflon tape or pipe joint compound to the threads on the shank(s).
2. Place shank(s) through holes in deck.
3. Apply in order: nutwasher and nut (see Figure 3).
4. Hand tighten nutwasher against deck of sink. (Maintain alignment of faucet or spout to sink while tightening.)
5. Attach supply lines.
6. Make sure drain is attached and turn on water supply – being sure to check for leaks. Tighten with wrench where needed.

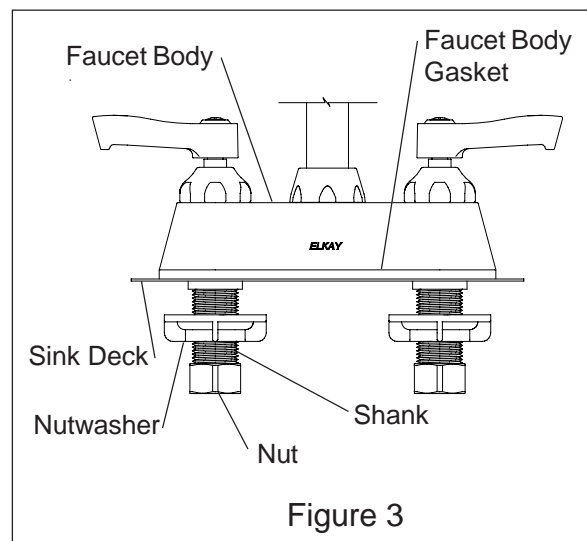

IMPORTANT END USER INFORMATION

Care and Cleaning Instructions

Your Elkay faucet has been constructed of the finest materials. However, certain precautions must be taken to maintain the lustrous decorative finish.

Do not use abrasive cleaners or harsh chemical cleansers on this product which could damage the finish.

A warm water wash with a wipedown using a soft cloth will generally remove dry water spots. Never use alcohol or other organic solvents.



COMMERCIAL SINKS AND FAUCETS LIMITED WARRANTY





Elkay warrants commercial sink and faucet products to be free of defects in workmanship and materials for a period of 5 years from the date of purchase. This warranty does not cover transportation or installation charges. Contact Elkay customer service (630-572-3192) for complete details and conditions.

TO OBTAIN SERVICE UNDER WARRANTY

1. Write to: Elkay
Attention: Consumer Service
2222 Camden Court
Oak Brook, Illinois 60523
2. Include a letter containing the following information:
 - a. Date of purchase and installation
 - b. Description of nature of defect.
 - c. Model number or description of model and/or component part if possible.


ELKAY®

Installation Instructions for Wall Mount and Deck Mount Faucets

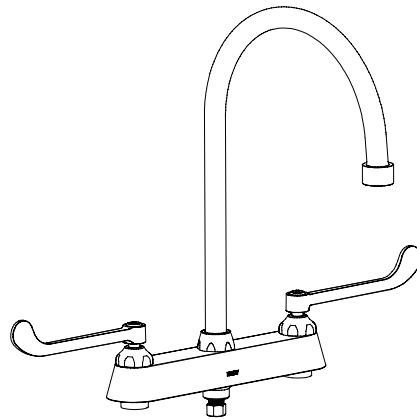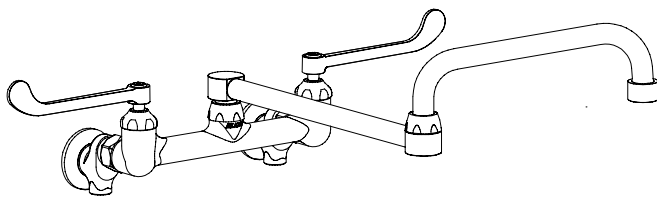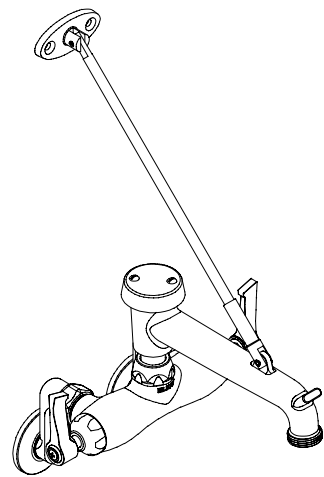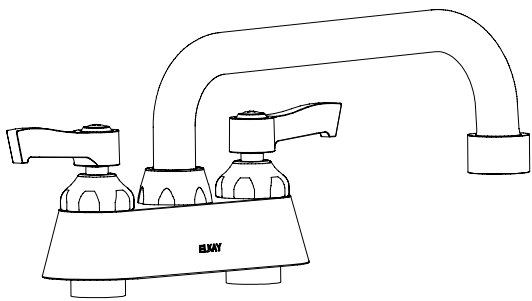


ELKAY ■ 2222 CAMDEN COURT ■ OAK BROOK, IL. 60523 USA

WALL MOUNT ASSEMBLY

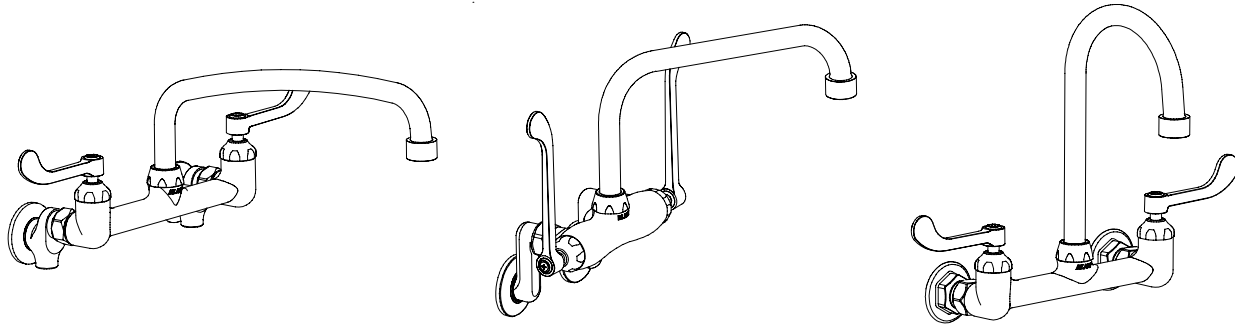


General Instructions

- Turn off the water supply at the main source.
- Hand tighten all parts prior to tightening with wrench. Do not force parts together.
- Handle plated surfaces with care, being careful not to scratch with tools.
- Wall mount faucets have a 1/2" I.P.S. female flanged inlet.
- For easier assembly, you may purchase as an accessory, the LKMK462 mounting kit (see Figure 2).

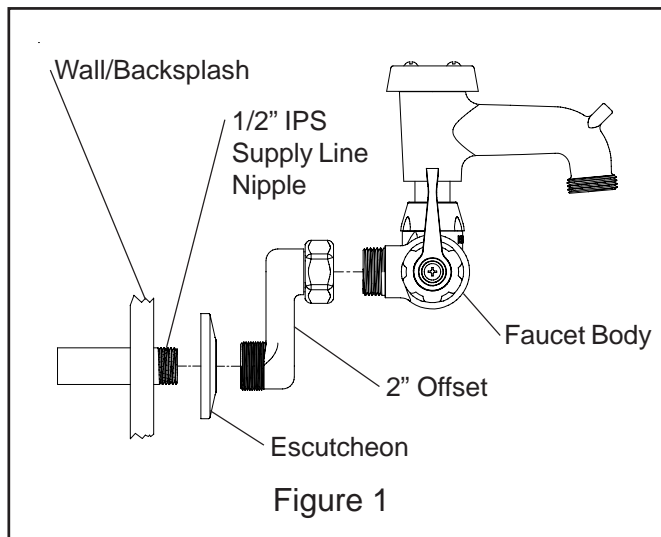

Assemble Faucet to Backsplash




1. Apply teflon tape or pipe joint compound to supply line nipples.
2. Place nipples through holes in backsplash.
3. Assemble each flanged inlet to one nipple, then the other.
4. Using the optional LKMK462, apply in order behind the back-splash: rubber washer, washer, lock nut and elbow (see Figure 2).
5. Thread flanged inlet loosely against wall or backsplash.
6. Carefully orient, mount and hand tighten the faucet to the two flanges. Be sure to include the washers provided.
7. Use wrench to tighten flange against backsplash. (Maintain alignment of faucet or spout to sink while tightening).
8. Wrench tighten flanges to faucet body.
9. Make sure drain is attached and turn on water supply - being sure to check for leaks. Wrench tighten where needed.

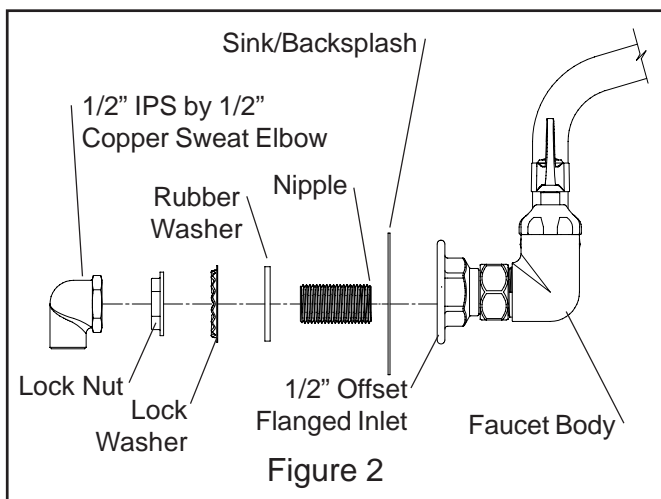

TO FIX SPOUT IN POSITION

1. Prior to spout installation, remove provided lock pin from sealed bag.
2. Place lock pin in the pierced hole at the base of the spout.
3. Align pin with slots in the ring found inside the throat of the spout connection on the faucet body.
4. Tighten spout nut to appropriate torque.

DECK MOUNT ASSEMBLY




General Instructions

- Turn off the water supply at the main source.
- Hand tighten all parts prior to tightening with wrench. Do not force parts together.
- Handle plated surfaces with care, being careful not to scratch with tools.
- All deck mount faucets and spouts come complete with compression nut and one piece nutwasher for ½" O.D. tube.

Assemble Base to Sink Deck

1. Apply Teflon tape or pipe joint compound to the threads on the shank(s).
2. Place shank(s) through holes in deck.
3. Apply in order: nutwasher and nut (see Figure 3).
4. Hand tighten nutwasher against deck of sink. (Maintain alignment of faucet or spout to sink while tightening.)
5. Attach supply lines.
6. Make sure drain is attached and turn on water supply – being sure to check for leaks. Tighten with wrench where needed.

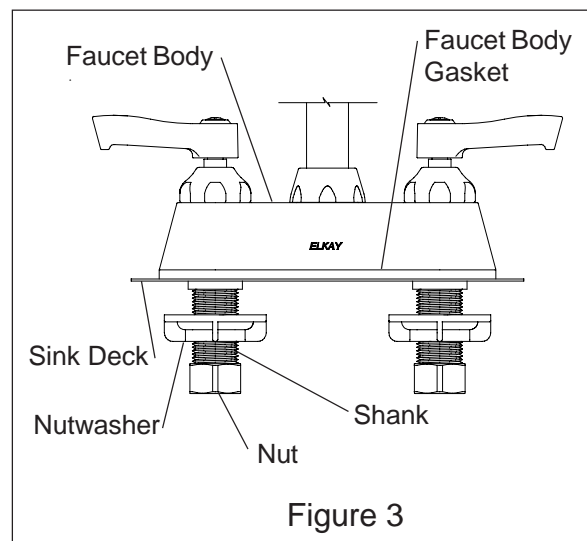

IMPORTANT END USER INFORMATION

Care and Cleaning Instructions

Your Elkay faucet has been constructed of the finest materials. However, certain precautions must be taken to maintain the lustrous decorative finish.

Do not use abrasive cleaners or harsh chemical cleansers on this product which could damage the finish.

A warm water wash with a wipedown using a soft cloth will generally remove dry water spots. Never use alcohol or other organic solvents.



COMMERCIAL SINKS AND FAUCETS LIMITED WARRANTY

Elkay warrants commercial sink and faucet products to be free of defects in workmanship and materials for a period of 5 years from the date of purchase. This warranty does not cover transportation or installation charges. Contact Elkay customer service (630-572-3192) for complete details and conditions.

TO OBTAIN SERVICE UNDER WARRANTY

1. Write to: Elkay
Attention: Consumer Service
2222 Camden Court
Oak Brook, Illinois 60523
2. Include a letter containing the following information:
 - a. Date of purchase and installation
 - b. Description of nature of defect.
 - c. Model number or description of model and/or component part if possible.