

3000K Llena LED Path AZT

15820AZT (Textured Architectural Bronze)

Project Name: _____
Location: _____
Type: _____
Qty: _____
Comments: _____



Ordering Information

Product ID	15820AZT
Finish	Textured Architectural Bronze
Available Finishes	AZT, BBR, CO, AZT, BBR, CO

Dimensions

Weight	1.50 LBS
--------	----------

Specifications

Material	Aluminum
----------	----------

Electrical

Voltage	12V
---------	-----

Qualifications

Safety Rated	Wet
Warranty	www.kichler.com/warranty

Primary Lamping

Light Source	LED
Lamp Included	Integrated

Dimensions

Height	22.50"
Length	6.25"
Width	6.25"

3000K Llena LED Path BBR

15820BBR (Bronzed Brass)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____



Ordering Information

Product ID 15820BBR

Finish Bronzed Brass

Available Finishes AZT, BBR, CO, AZT, BBR, CO

Dimensions

Weight 1.50 LBS

Specifications

Material Brass

Electrical

Voltage 12V

Qualifications

Safety Rated Wet

Warranty www.kichler.com/warranty

Primary Lamping

Light Source LED

Lamp Included Integrated

Dimensions

Height 22.50"

Length 6.25"

Width 6.25"


Notes:

1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.

2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

3000K Llana LED Path CO

15820CO (Copper)

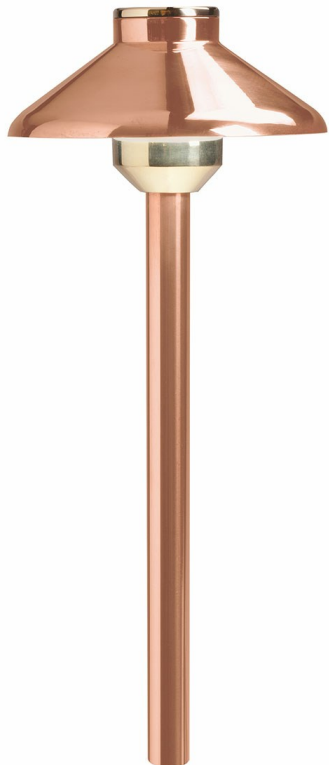

Dimensions

Height	22.50"
Length	6.25"
Width	6.25"

Project Name: _____
Location: _____
Type: _____
Qty: _____
Comments: _____

Ordering Information

Product ID	15820CO
Finish	Copper
Available Finishes	AZT, BBR, CO, AZT, BBR, CO

Dimensions

Weight	1.50 LBS
--------	----------

Specifications

Material	Copper
----------	--------

Electrical

Voltage	12V
---------	-----

Qualifications

Safety Rated	Wet
Warranty	www.kichler.com/warranty

Primary Lamping

Light Source	LED
Lamp Included	Integrated

Notes:

- 1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
- 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.