

Kevlar Collection
60 Inch Kevlar Fan MWH
 310150MWH

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Product Information

| | |
|--------------|-------------------|
| Product ID | 310150MWH |
| Blade Finish | Matte White |
| Collection | Kevlar Collection |

Airflow, Power and Efficiency

| Speed | RPM | CFM | CFM/ Watt | Amps | Watts |
|-------|-----|------|-----------|------|-------|
| High | 148 | 6210 | 83 | .63 | 75 |
| Med | 100 | 4238 | 115 | .44 | 37 |
| Low | 57 | 2244 | 171 | .26 | 13 |

Specifications

| | |
|---------------------------|----------------------------|
| Number of Blades | 5 |
| Blades Included | Yes |
| Blade Pitch | 14 Degrees |
| Blade Sweep | 60" |
| Blades Reversible | No |
| Blade Material | ABS |
| Optional Blades Available | No |
| Downrod 1 | 1.00 OD X 4.50 |
| Primary Control System | Pull Chain |
| Remote Included | No |
| Wall Control Included | No |
| Low Ceiling Adaptable | Yes, Low Ceiling Adaptable |
| Lead Wire Length | 78.00" |
| Motor Size | 188MM X 25MM |
| Motor Type | AC INDUCTION |

Downlight

| | |
|------------------------------|----|
| Optional Light Kit Available | No |
|------------------------------|----|

Safety Listings & Certifications

| | |
|--------------|--|
| Safety Rated | Wet |
| Warranty | www.kichler.com/warranty |


Installation

Installation requirements

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes



Dimensions

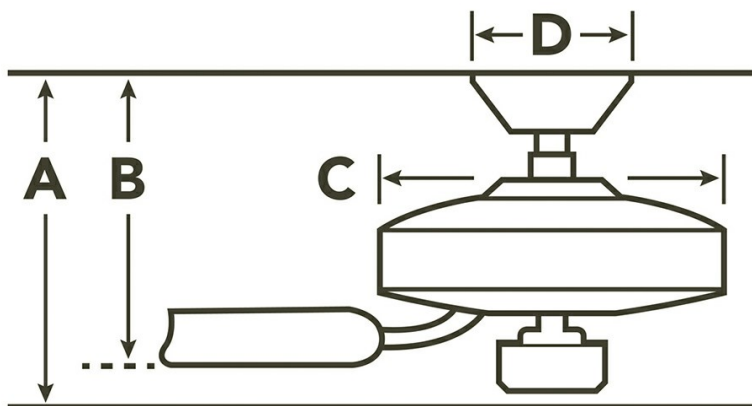

| Downrod | A | B | C | D |
|----------------|-------|-------|-------|------|
| 1.00 OD X 4.50 | 13.75 | 11.50 | 13.00 | 6.75 |

Available Finishes

| Finish | Fixture | Glass | Blade 1 | Blade 2 |
|--------|---------|-------|---------|---------|
| | | | | |

Kevlar Collection
60 Inch Kevlar Fan MWH
 310150MWH

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

| | | | | |
|------------------------------|-----------|--|----------------|--|
| Weathered Steel Powder Coat | 310150WSP | | SATIN BLACK | |
| Matte White | 310150MWH | | MATTE WHITE | |
| Weathered Copper Powder Coat | 310150WCP | | BROWN | |

| | |
|---|----------------------------|
| | marked ""For Fan Support"" |
| Electrical Requirements | 120V 60Hz AC |
| Hanging Weight | 26.20 LBS |
| Minimum Distance Between Bottom Of Fan Blade To Floor | 7 feet |

Kevlar Collection
60 Inch Kevlar Fan WCP
 310150WCP (Weathered Copper Powder Coat)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____



Product Information

| | |
|--------------|------------------------------|
| Product ID | 310150WCP |
| Finish | Weathered Copper Powder Coat |
| Blade Finish | Brown |
| Collection | Kevlar Collection |


Airflow, Power and Efficiency

| Speed | RPM | CFM | CFM/ Watt | Amps | Watts |
|-------|-----|------|-----------|------|-------|
| High | 148 | 6210 | 83 | .63 | 75 |
| Med | 100 | 4238 | 115 | .44 | 37 |
| Low | 57 | 2244 | 171 | .26 | 13 |

Specifications

| | |
|---------------------------|----------------------------|
| Number of Blades | 5 |
| Blades Included | Yes |
| Blade Pitch | 14 Degrees |
| Blade Sweep | 60" |
| Blades Reversible | No |
| Blade Material | ABS |
| Optional Blades Available | No |
| Downrod 1 | 1.00 OD X 4.50 |
| Primary Control System | Pull Chain |
| Remote Included | No |
| Wall Control Included | No |
| Low Ceiling Adaptable | Yes, Low Ceiling Adaptable |
| Lead Wire Length | 78.00" |
| Motor Size | 188MM X 25MM |
| Motor Type | AC INDUCTION |

Dimensions

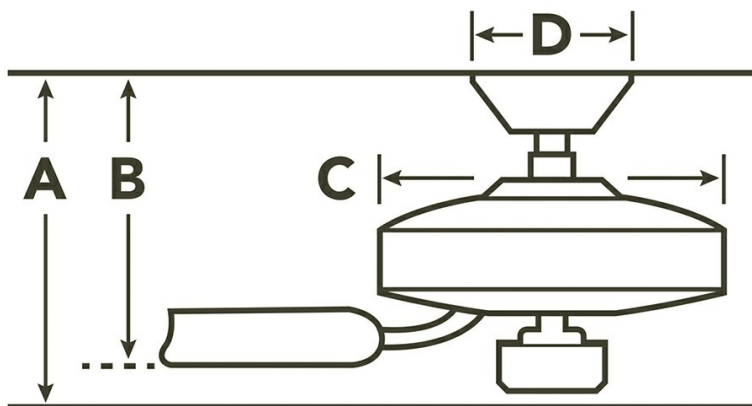

| Downrod | A | B | C | D |
|----------------|-------|-------|-------|------|
| 1.00 OD X 4.50 | 13.75 | 11.50 | 13.00 | 6.75 |

Available Finishes

| Finish | Fixture | Glass | Blade 1 | Blade 2 |
|--------|---------|-------|---------|---------|
| | | | | |

Downlight

| | |
|------------------------------|----|
| Optional Light Kit Available | No |
|------------------------------|----|

Safety Listings & Certifications

| | |
|--------------|--|
| Safety Rated | Wet |
| Warranty | www.kichler.com/warranty |

Installation

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds.

Installation requirements

Kevlar Collection

60 Inch Kevlar Fan WCP

310150WCP (Weathered Copper Powder Coat)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

| | | | | |
|---------------------------------|-----------|--|----------------|--|
| Weathered Steel Powder Coat | 310150WSP | | SATIN BLACK | |
| Matte White | 310150MWH | | MATTE WHITE | |
| Weathered Copper Powder Coat | 310150WCP | | BROWN | |

Use only ETL/UL listed
electrical junction boxes
marked ""For Fan Support""

Electrical Requirements 120V 60Hz AC

Hanging Weight 26.20 LBS

Minimum Distance Between
Bottom Of Fan Blade To 7 feet
Floor

Notes:

- 1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
- 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

Kevlar Collection

60 Inch Kevlar Fan WSP

310150WSP (Weathered Steel Powder Coat)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Product Information

| | |
|--------------|-----------------------------|
| Product ID | 310150WSP |
| Finish | Weathered Steel Powder Coat |
| Blade Finish | Satin Black |
| Collection | Kevlar Collection |

Airflow, Power and Efficiency


| Speed | RPM | CFM | CFM/ Watt | Amps | Watts |
|-------|-----|------|-----------|------|-------|
| High | 148 | 6210 | 83 | .63 | 75 |
| Med | 100 | 4238 | 115 | .44 | 37 |
| Low | 57 | 2244 | 171 | .26 | 13 |



Specifications

| | |
|---------------------------|----------------------------|
| Number of Blades | 5 |
| Blades Included | Yes |
| Blade Pitch | 14 Degrees |
| Blade Sweep | 60" |
| Blades Reversible | No |
| Blade Material | ABS |
| Optional Blades Available | No |
| Downrod 1 | 1.00 OD X 4.50 |
| Primary Control System | Pull Chain |
| Remote Included | No |
| Wall Control Included | No |
| Low Ceiling Adaptable | Yes, Low Ceiling Adaptable |
| Lead Wire Length | 78.00" |
| Motor Size | 188MM X 25MM |
| Motor Type | AC INDUCTION |

Dimensions

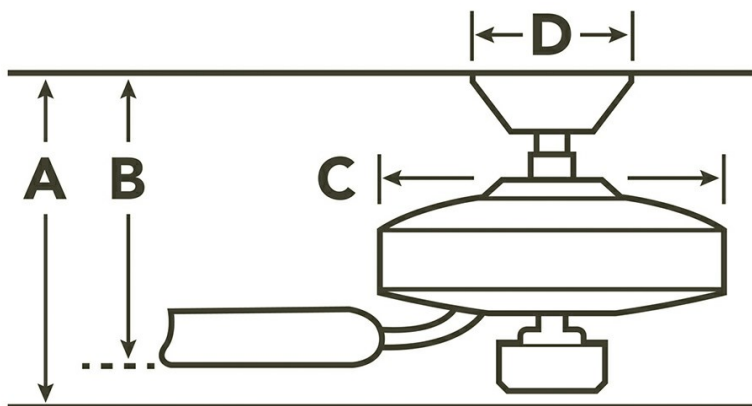

| Downrod | A | B | C | D |
|----------------|-------|-------|-------|------|
| 1.00 OD X 4.50 | 13.75 | 11.50 | 13.00 | 6.75 |

Available Finishes

| Finish | Fixture | Glass | Blade 1 | Blade 2 |
|--------|---------|-------|---------|---------|
| | | | | |

Downlight

| | |
|------------------------------|----|
| Optional Light Kit Available | No |
|------------------------------|----|

Safety Listings & Certifications

| | |
|--------------|--|
| Safety Rated | Wet |
| Warranty | www.kichler.com/warranty |

Installation

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds.

Installation requirements

Notes:

1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.

2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

Kevlar Collection

60 Inch Kevlar Fan WSP

310150WSP (Weathered Steel Powder Coat)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

| | | | | |
|---------------------------------|-----------|--|----------------|--|
| Weathered Steel Powder Coat | 310150WSP | | SATIN BLACK | |
| Matte White | 310150MWH | | MATTE WHITE | |
| Weathered Copper Powder Coat | 310150WCP | | BROWN | |

Use only ETL/UL listed
electrical junction boxes
marked ""For Fan Support""

Electrical Requirements 120V 60Hz AC

Hanging Weight 26.20 LBS

Minimum Distance Between
Bottom Of Fan Blade To 7 feet
Floor

Notes:

- 1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
- 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.