
Starkk Collection 42" Starkk LED Ceiling Fan MWH

330171MWH

Dimensions

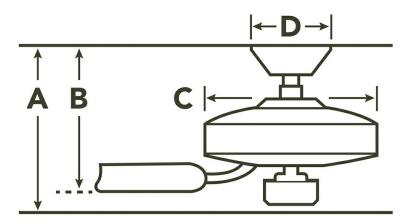

Downrod	Α	В	С	D
1.00 OD X 4.50	14.15	9.75	10.50	6.30

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	

Product Information

Product ID	330171MWH
Blade Finish	Matte White/Matte White
Collection	Starkk Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	228	3560	74	.4	48
Med	172	2916	114	.3	26
Low	116	1826	163	.21	11

Specifications

•	
Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	42"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	153MM X 12MM
Motor Type	AC

Downlight

Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
Number of Lights/LEDs	1
Glass Description	Etched Cased Opal
Optional Light Kit Available	No
Efficacy (LMIW)	94
Kelvin Temperature	3000K
Color Rendering Index	80




7711 East Pleasant Valley Road Cleveland, Ohio 44131-8010 Toll free: 866.558.5706 or kichler.com



Information provided is subject to change without notice.

All values are design or typical values when measured under laboratory conditions.





Starkk Collection 42" Starkk LED Ceiling Fan MWH

330171MWH

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
Natural Brass	330171NBR	ETCHED CASED OPAL	MEDIUM CHERRY	DARK CHERRY
Brushed Nickel	330171NI	ETCHED CASED OPAL	SILVER	WALNUT
Olde Bronze	330171OZ	ETCHED CASED OPAL	WALNUT	CHERRY
Polished Nickel	330171PN	ETCHED CASED OPAL	SILVER	WALNUT
Matte White	330171MWH	ETCHED CASED OPAL	MATTE WHITE	MATTE WHITE

Control Options

Control Options	
Product ID	Descr
371042MUL	56K Wall Control System Basic

Safety Listings & Certifications


Safety Rated	Dry
Warranty	www.kichler.com/warranty
Installation	
Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Starkk Collection 42" Starkk LED Ceiling Fan NBR

330171NBR (Natural Brass)

|--|

Dimensions

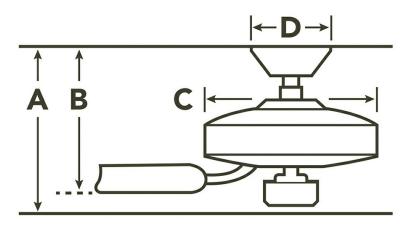

Downrod	Α	В	С	D
1.00 OD X 4.50	14.15	9.75	10.50	6.30

Available Finishes

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	

Product Information

Product ID	330171NBR
Finish	Natural Brass
Blade Finish	Medium Cherry/Dark Cherry
Collection	Starkk Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	228	3560	74	.4	48
Med	172	2916	114	.3	26
Low	116	1826	163	.21	11

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	42"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	153MM X 12MM
Motor Type	AC

Downlight

Downlight Included Yes Light Source LED Downlight Bulb Included Integrated Number of Lights/LEDs 1 Glass Description Etched Cased Opal Optional Light Kit Available No Efficacy (LMIW) 94 Kelvin Temperature 3000K Color Rendering Index 80		
Downlight Bulb Included Integrated Number of Lights/LEDs 1 Glass Description Etched Cased Opal Optional Light Kit Available No Efficacy (LMIW) 94 Kelvin Temperature 3000K	Downlight Included	Yes
Number of Lights/LEDs 1 Glass Description Etched Cased Opal Optional Light Kit Available No Efficacy (LMIW) 94 Kelvin Temperature 3000K	Light Source	LED
Glass Description Etched Cased Opal Optional Light Kit Available No Efficacy (LMIW) 94 Kelvin Temperature 3000K	Downlight Bulb Included	Integrated
Optional Light Kit Available No Efficacy (LMIW) 94 Kelvin Temperature 3000K	Number of Lights/LEDs	1
Efficacy (LMIW) 94 Kelvin Temperature 3000K	Glass Description	Etched Cased Opal
Kelvin Temperature 3000K	Optional Light Kit Available	No
	Efficacy (LMIW)	94
Color Rendering Index 80	Kelvin Temperature	3000K
	Color Rendering Index	80



Starkk Collection 42" Starkk LED Ceiling Fan NBR

330171NBR (Natural Brass)

Finish	Fixture	Glass	Blade 1	Blade 2	
Natural Brass	330171NBR	ETCHED CASED OPAL	MEDIUM CHERRY	DARK CHERRY	
Brushed Nickel	330171NI	330171NI ETCHED CASED OPAL		WALNUT	
Olde Bronze	330171OZ	ETCHED CASED OPAL	WALNUT	CHERRY	
Polished Nickel	330171PN	ETCHED CASED OPAL	SILVER	WALNUT	
Matte White	330171MWH	ETCHED CASED OPAL	MATTE WHITE	MATTE WHITE	

O 1		$\overline{}$	4.5	
('Ont	rol	()n	STIC	ne
Cont	I OI	\mathbf{O}	וטווי	l IO

Product ID	Descr
371042MUL	56K Wall Control System Basic

Project Name:
Location:
Type:
Qty:
Comments:

Safety Listings & Ce Safety Rated	Dry
Warranty	www.kichler.com/warranty
Installation	
Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Minimum Distance Between Bottom Of Fan Blade To	7.5 feet


Floor

Starkk Collection 42" Starkk LED Ceiling Fan NI

330171NI (Brushed Nickel)



Dimensions

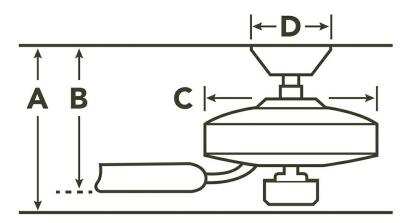

Downrod	Α	В	С	D
1.00 OD X 4.50	14.15	9.75	10.50	6.30

Available Finishes

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	

Product Information

Product ID	330171NI
Finish	Brushed Nickel
Blade Finish	Silver/Walnut
Collection	Starkk Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	228	3560	74	.4	48
Med	172	2916	114	.3	26
Low	116	1826	163	.21	11

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	42"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	153MM X 12MM
Motor Type	AC

Downlight

_ • • • • • • • • • • • • • • • • • • •	
Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
Number of Lights/LEDs	1
Glass Description	Etched Cased Opal
Optional Light Kit Available	No
Efficacy (LMIW)	94
Kelvin Temperature	3000K
Color Rendering Index	80



Starkk Collection 42" Starkk LED Ceiling Fan NI

330171NI (Brushed Nickel)

Finish	Fixture	Glass	Blade 1	Blade 2
Natural Brass	330171NBR	ETCHED CASED OPAL	MEDIUM CHERRY	DARK CHERRY
Brushed Nickel	330171NI	ETCHED CASED OPAL	SILVER	WALNUT
Olde Bronze	330171OZ	ETCHED CASED OPAL	WALNUT	CHERRY
Polished Nickel	330171PN	ETCHED CASED OPAL	SILVER	WALNUT
Matte White	330171MWH	ETCHED CASED OPAL	MATTE WHITE	MATTE WHITE

\sim			4.5
('On'	tral	()n	tione
CULL	II OI	Ou	tions

Product ID	Descr
371042MUL	56K Wall Control System Basic

Project Name:	
Location:	
Туре:	
Qty:	
Comments: _	


Safety Listings & Ce Safety Rated	Dry
Warranty	www.kichler.com/warranty
Installation	
Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Starkk Collection 42" Starkk LED Ceiling Fan OZ

330171OZ (Olde Bronze)



Dimensions

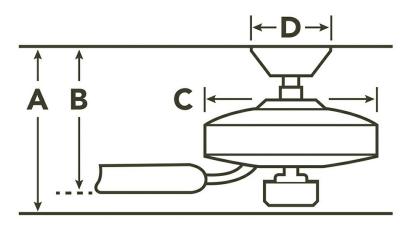

Downrod	Α	В	С	D
1.00 OD X 4.50	14.15	9.75	10.50	6.30

Available Finishes

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	

Product Information

Product ID	330171OZ
Finish	Olde Bronze
Blade Finish	Walnut/Cherry
Collection	Starkk Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	228	3560	74	.4	48
Med	172	2916	114	.3	26
Low	116	1826	163	.21	11

Specifications

•	
Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	42"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	153MM X 12MM
Motor Type	AC

Downlight

Downlight Included Yes Light Source LED Downlight Bulb Included Integrated Number of Lights/LEDs 1 Glass Description Etched Cased Opal Optional Light Kit Available No Efficacy (LMIW) 94 Kelvin Temperature 3000K Color Rendering Index 80		
Downlight Bulb Included Integrated Number of Lights/LEDs 1 Glass Description Etched Cased Opal Optional Light Kit Available No Efficacy (LMIW) 94 Kelvin Temperature 3000K	Downlight Included	Yes
Number of Lights/LEDs 1 Glass Description Etched Cased Opal Optional Light Kit Available No Efficacy (LMIW) 94 Kelvin Temperature 3000K	Light Source	LED
Glass Description Etched Cased Opal Optional Light Kit Available No Efficacy (LMIW) 94 Kelvin Temperature 3000K	Downlight Bulb Included	Integrated
Optional Light Kit Available No Efficacy (LMIW) 94 Kelvin Temperature 3000K	Number of Lights/LEDs	1
Efficacy (LMIW) 94 Kelvin Temperature 3000K	Glass Description	Etched Cased Opal
Kelvin Temperature 3000K	Optional Light Kit Available	No
	Efficacy (LMIW)	94
Color Rendering Index 80	Kelvin Temperature	3000K
	Color Rendering Index	80



Starkk Collection 42" Starkk LED Ceiling Fan OZ

330171OZ (Olde Bronze)

Finish	Fixture	Glass	Blade 1	Blade 2
Natural Brass	330171NBR	ETCHED CASED OPAL	MEDIUM CHERRY	DARK CHERRY
Brushed Nickel	330171NI	ETCHED CASED OPAL	SILVER	WALNUT
Olde Bronze	330171OZ	ETCHED CASED OPAL	WALNUT	CHERRY
Polished Nickel	330171PN	ETCHED CASED OPAL	SILVER	WALNUT
Matte White	330171MWH	ETCHED CASED OPAL	MATTE WHITE	MATTE WHITE

		\sim	er e
COD	trol	()m	tione
CULI	LI OL	OU	tions

Product ID	Descr
371042MUL	56K Wall Control System Basic

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	


Safety Rated	Dry
Warranty	www.kichler.com/warranty
Installation	
Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Starkk Collection 42" Starkk LED Ceiling Fan PN

330171PN (Polished Nickel)

|--|

Dimensions

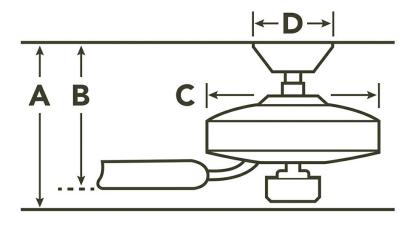

Downrod	Α	В	С	D
1.00 OD X 4.50	14.15	9.75	10.50	6.30

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	

Product Information

Product ID	330171PN
Finish	Polished Nickel
Blade Finish	Silver/Walnut
Collection	Starkk Collection

Airflow, Power and Efficiency

	Speed	RPM	CFM	CFM/ Watt	Amps	Watts	
	High	228	3560	74	.4	48	
	Med	172	2916	114	.3	26	
	Low	116	1826	163	.21	11	

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	42"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Motor Size	153MM X 12MM
Motor Type	AC

Downlight


Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
Number of Lights/LEDs	1
Glass Description	Etched Cased Opal
Optional Light Kit Available	No
Efficacy (LMIW)	94
Kelvin Temperature	3000K
Color Rendering Index	80



7711 East Pleasant Valley Road Cleveland, Ohio 44131-8010 Toll free: 866.558.5706 or kichler.com

Notes

1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.





Starkk Collection 42" Starkk LED Ceiling Fan PN

330171PN (Polished Nickel)

Project Name:	
Location:	
Type:	
Qty:	
Comments:	

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
Natural Brass	330171NBR	ETCHED CASED OPAL	MEDIUM CHERRY	DARK CHERRY
Brushed Nickel	330171NI	ETCHED CASED OPAL	SILVER	WALNUT
Olde Bronze	330171OZ	ETCHED CASED OPAL	WALNUT	CHERRY
Polished Nickel	330171PN	ETCHED CASED OPAL	SILVER	WALNUT
Matte White	330171MWH	ETCHED CASED OPAL	MATTE WHITE	MATTE WHITE

Control Options

Control Options			
	Product ID	Descr	
	371042MUL	56K Wall Control System Basic	

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty
Installation	
Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet