

Starkk Collection
60" Starkk LED Ceiling Fan MWH
 330180MWH

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____



Product Information

Product ID	330180MWH
Blade Finish	Matte White/Matte White
Collection	Starkk Collection


Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	125	6112	86	.61	71
Med	95	4888	105	.49	47
Low	65	3216	141	.35	23

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	60"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	188MM X 25MM
Motor Type	AC

Dimensions

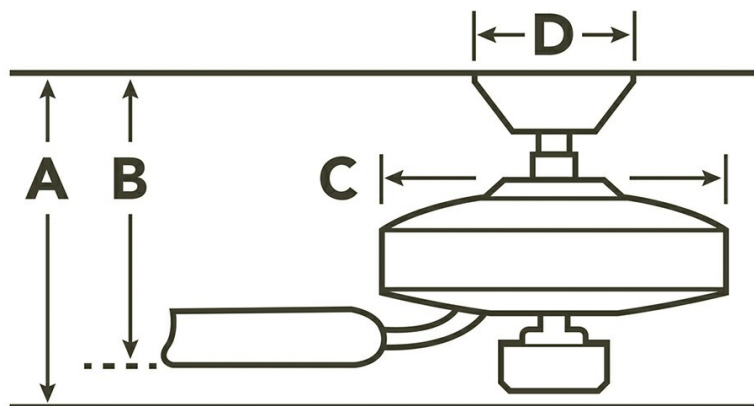

Downrod	A	B	C	D
1.00 OD X 4.50	14.15	9.75	10.50	6.30

Downlight

Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
Number of Lights/LEDs	1
Glass Description	Etched Cased Opal
Optional Light Kit Available	No
Efficacy (LMIW)	94
Kelvin Temperature	3000K
Color Rendering Index	80

Starkk Collection

60" Starkk LED Ceiling Fan MWH

330180MWH

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
Natural Brass	330180NBR	ETCHED CASED OPAL	MEDIUM CHERRY	DARK CHERRY
Brushed Nickel	330180NI	ETCHED CASED OPAL	SILVER	WALNUT
Polished Nickel	330180PN	ETCHED CASED OPAL	SILVER	WALNUT
Matte White	330180MWH	ETCHED CASED OPAL	MATTE WHITE	MATTE WHITE
Olde Bronze	330180OZ	ETCHED CASED OPAL	CHERRY	WALNUT

Control Options

Product ID	Descr
371042MUL	56K Wall Control System Basic

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Starkk Collection
60" Starkk LED Ceiling Fan NBR
 330180NBR (Natural Brass)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____




Product Information

Product ID	330180NBR
Finish	Natural Brass
Blade Finish	Medium Cherry/Dark Cherry
Collection	Starkk Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	125	6112	86	.61	71
Med	95	4888	105	.49	47
Low	65	3216	141	.35	23

Dimensions

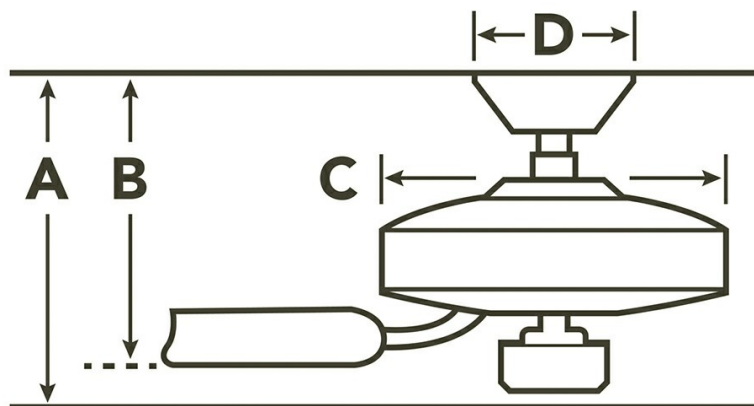

Downrod	A	B	C	D
1.00 OD X 4.50	14.15	9.75	10.50	6.30

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	60"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	188MM X 25MM
Motor Type	AC

Downlight

Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
Number of Lights/LEDs	1
Glass Description	Etched Cased Opal
Optional Light Kit Available	No
Efficacy (LMIW)	94
Kelvin Temperature	3000K
Color Rendering Index	80

Available Finishes

Starkk Collection

60" Starkk LED Ceiling Fan NBR

330180NBR (Natural Brass)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Finish	Fixture	Glass	Blade 1	Blade 2
Natural Brass	330180NBR	ETCHED CASED OPAL	MEDIUM CHERRY	DARK CHERRY
Brushed Nickel	330180NI	ETCHED CASED OPAL	SILVER	WALNUT
Polished Nickel	330180PN	ETCHED CASED OPAL	SILVER	WALNUT
Matte White	330180MWH	ETCHED CASED OPAL	MATTE WHITE	MATTE WHITE
Olde Bronze	330180OZ	ETCHED CASED OPAL	CHERRY	WALNUT

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

Installation requirements

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""

Electrical Requirements	120V 60Hz AC
-------------------------	--------------

Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet
---	----------

Control Options

Product ID	Descr
371042MUL	56K Wall Control System Basic

Starkk Collection
60" Starkk LED Ceiling Fan NI
 330180NI (Brushed Nickel)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Product Information

Product ID	330180NI
Finish	Brushed Nickel
Blade Finish	Silver/Walnut
Collection	Starkk Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	125	6112	86	.61	71
Med	95	4888	105	.49	47
Low	65	3216	141	.35	23

Specifications


Number of Blades	5
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	60"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	188MM X 25MM
Motor Type	AC

Downlight

Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
Number of Lights/LEDs	1
Glass Description	Etched Cased Opal
Optional Light Kit Available	No
Efficacy (LMIW)	94
Kelvin Temperature	3000K
Color Rendering Index	80



Dimensions

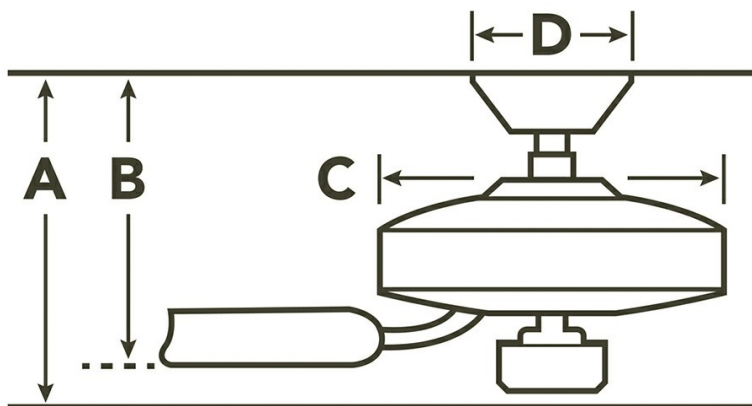

Downrod	A	B	C	D
1.00 OD X 4.50	14.15	9.75	10.50	6.30

Available Finishes

Starkk Collection
60" Starkk LED Ceiling Fan NI
 330180NI (Brushed Nickel)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Finish	Fixture	Glass	Blade 1	Blade 2
Natural Brass	330180NBR	ETCHED CASED OPAL	MEDIUM CHERRY	DARK CHERRY
Brushed Nickel	330180NI	ETCHED CASED OPAL	SILVER	WALNUT
Polished Nickel	330180PN	ETCHED CASED OPAL	SILVER	WALNUT
Matte White	330180MWH	ETCHED CASED OPAL	MATTE WHITE	MATTE WHITE
Olde Bronze	330180OZ	ETCHED CASED OPAL	CHERRY	WALNUT

Safety Listings & Certifications

Safety Rated Dry
 Warranty www.kichler.com/warranty

Installation

Installation requirements The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""

Electrical Requirements 120V 60Hz AC

Minimum Distance Between Bottom Of Fan Blade To Floor 7.5 feet

Control Options

Product ID	Descr
371042MUL	56K Wall Control System Basic

Starkk Collection
60" Starkk LED Ceiling Fan OZ
 330180OZ (Olde Bronze)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Product Information

Product ID	330180OZ
Finish	Olde Bronze
Blade Finish	Cherry/Walnut
Collection	Starkk Collection

Airflow, Power and Efficiency


Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	125	6112	86	.61	71
Med	95	4888	105	.49	47
Low	65	3216	141	.35	23



Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	60"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	188MM X 25MM
Motor Type	AC

Dimensions

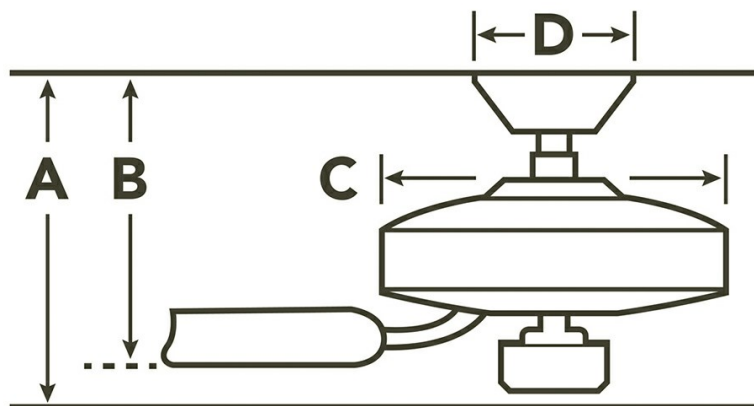

Downrod	A	B	C	D
1.00 OD X 4.50	14.15	9.75	10.50	6.30

Downlight

Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
Number of Lights/LEDs	1
Glass Description	Etched Cased Opal
Optional Light Kit Available	No
Efficacy (LMIW)	94
Kelvin Temperature	3000K
Color Rendering Index	80

Available Finishes

Starkk Collection
60" Starkk LED Ceiling Fan OZ
 330180OZ (Olde Bronze)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Finish	Fixture	Glass	Blade 1	Blade 2
Natural Brass	330180NBR	ETCHED CASED OPAL	MEDIUM CHERRY	DARK CHERRY
Brushed Nickel	330180NI	ETCHED CASED OPAL	SILVER	WALNUT
Polished Nickel	330180PN	ETCHED CASED OPAL	SILVER	WALNUT
Matte White	330180MWH	ETCHED CASED OPAL	MATTE WHITE	MATTE WHITE
Olde Bronze	330180OZ	ETCHED CASED OPAL	CHERRY	WALNUT

Safety Listings & Certifications

Safety Rated: Dry
 Warranty: www.kichler.com/warranty

Installation

Installation requirements: The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""

Electrical Requirements: 120V 60Hz AC

Minimum Distance Between Bottom Of Fan Blade To Floor: 7.5 feet

Control Options

Product ID	Descr
371042MUL	56K Wall Control System Basic

Starkk Collection
60" Starkk LED Ceiling Fan PN
 330180PN (Polished Nickel)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Product Information

Product ID	330180PN
Finish	Polished Nickel
Blade Finish	Silver/Walnut
Collection	Starkk Collection

Airflow, Power and Efficiency


Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	125	6112	86	.61	71
Med	95	4888	105	.49	47
Low	65	3216	141	.35	23



Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	60"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	188MM X 25MM
Motor Type	AC

Dimensions

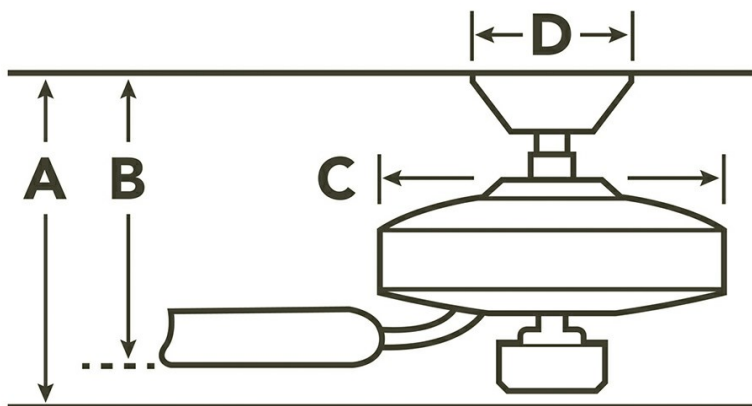

Downrod	A	B	C	D
1.00 OD X 4.50	14.15	9.75	10.50	6.30

Downlight

Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
Number of Lights/LEDs	1
Glass Description	Etched Cased Opal
Optional Light Kit Available	No
Efficacy (LMIW)	94
Kelvin Temperature	3000K
Color Rendering Index	80

Available Finishes

Starkk Collection
60" Starkk LED Ceiling Fan PN
 330180PN (Polished Nickel)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Finish	Fixture	Glass	Blade 1	Blade 2
Natural Brass	330180NBR	ETCHED CASED OPAL	MEDIUM CHERRY	DARK CHERRY
Brushed Nickel	330180NI	ETCHED CASED OPAL	SILVER	WALNUT
Polished Nickel	330180PN	ETCHED CASED OPAL	SILVER	WALNUT
Matte White	330180MWH	ETCHED CASED OPAL	MATTE WHITE	MATTE WHITE
Olde Bronze	330180OZ	ETCHED CASED OPAL	CHERRY	WALNUT

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

Installation requirements: The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""

Electrical Requirements	120V 60Hz AC
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
371042MUL	56K Wall Control System Basic