

Bowen Ceiling Fan Collection

42" Bowen Ceiling Fan MWH

330241MWH

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Product Information

Product ID	330241MWH
Blade Finish	Matte White/Matte White
Collection	Bowen Ceiling Fan Collection

Airflow, Power and Efficiency


Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	200	3897	82	.4	48
Med	150	2997	119	.3	25
Low	96	1822	177	.2	10



Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	42"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	153MM X 15MM
Motor Type	AC

Dimensions

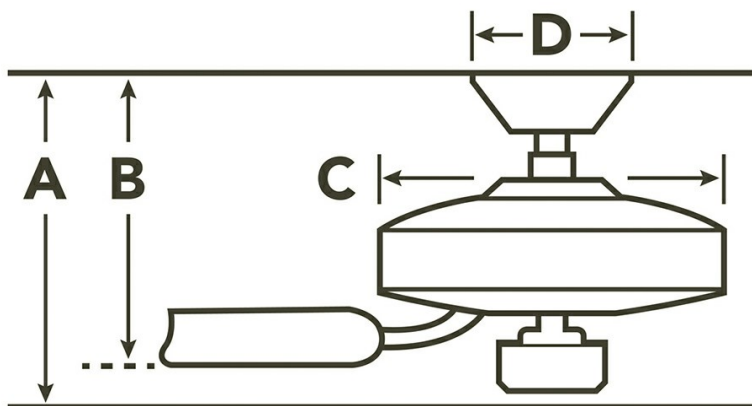

Downrod	A	B	C	D
1.00 OD X 4.50	13.75	11.00	8.00	5.90

Downlight

Optional Light Kit Available	No
------------------------------	----

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds.

Installation requirements

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

Bowen Ceiling Fan Collection
42" Bowen Ceiling Fan MWH
 330241MWH

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Matte White	330241MWH		MATTE WHITE	MATTE WHITE
Olde Bronze	330241OZ		WALNUT	CHERRY
Brushed Nickel	330241NI		WALNUT	SILVER

Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""

Electrical Requirements 120V 60Hz AC

Minimum Distance Between
 Bottom Of Fan Blade To Floor 7.5 feet

Control Options

Product ID	Descr
337001WH	Universal Remote Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
370040	4 Speed Rotary Switch 10 AMP

Bowen Ceiling Fan Collection

42" Bowen Ceiling Fan NI

330241NI (Brushed Nickel)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Product Information

Product ID	330241NI
Finish	Brushed Nickel
Blade Finish	Walnut/Silver
Collection	Bowen Ceiling Fan Collection

Airflow, Power and Efficiency


Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	200	3897	82	.4	48
Med	150	2997	119	.3	25
Low	96	1822	177	.2	10



Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	42"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	153MM X 15MM
Motor Type	AC

Dimensions

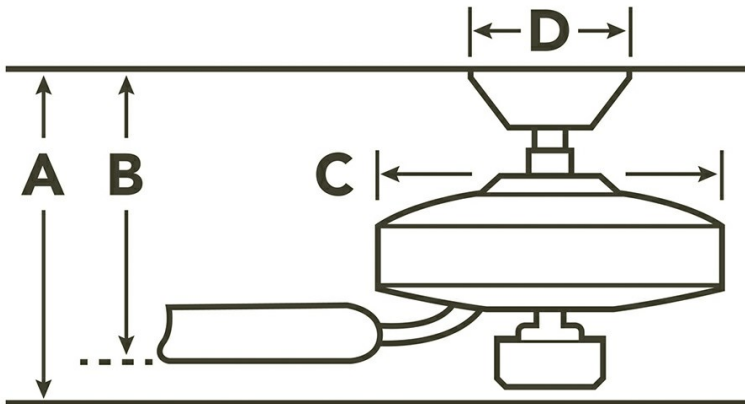

Downrod	A	B	C	D
1.00 OD X 4.50	13.75	11.00	8.00	5.90

Downlight

Optional Light Kit Available	No
------------------------------	----

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

The electrical junction box

Notes:

- 1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
- 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

Bowen Ceiling Fan Collection

42" Bowen Ceiling Fan NI

330241NI (Brushed Nickel)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
Matte White	330241MWH		MATTE WHITE	MATTE WHITE
Olde Bronze	330241OZ		WALNUT	CHERRY
Brushed Nickel	330241NI		WALNUT	SILVER

Installation requirements and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""

Electrical Requirements 120V 60Hz AC

Minimum Distance Between Bottom Of Fan Blade To Floor 7.5 feet

Control Options

Product ID	Descr
337001WH	Universal Remote Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
370040	4 Speed Rotary Switch 10 AMP

Bowen Ceiling Fan Collection

42" Bowen Ceiling Fan OZ

330241OZ (Olde Bronze)

Project Name: _____

Location: _____


Type: _____

Qty: _____

Comments: _____



Dimensions

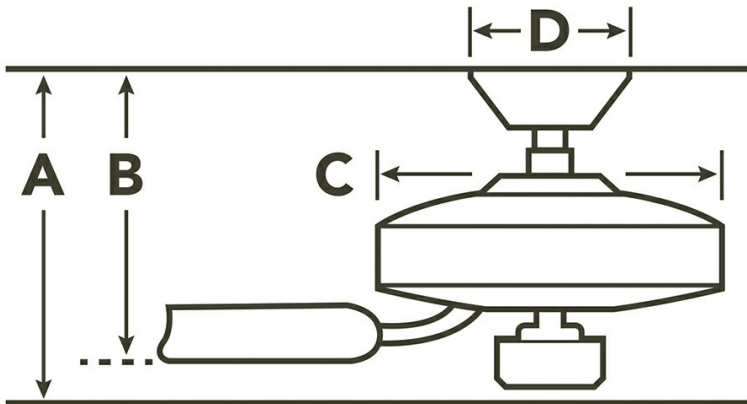

Downrod	A	B	C	D
1.00 OD X 4.50	13.75	11.00	8.00	5.90

Product Information

Product ID	330241OZ
Finish	Olde Bronze
Blade Finish	Walnut/Cherry
Collection	Bowen Ceiling Fan Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	200	3897	82	.4	48
Med	150	2997	119	.3	25
Low	96	1822	177	.2	10

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	42"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	153MM X 15MM
Motor Type	AC

Downlight

Optional Light Kit Available	No
------------------------------	----

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

The electrical junction box

Notes:

1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.

2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

Bowen Ceiling Fan Collection

42" Bowen Ceiling Fan OZ

330241OZ (Olde Bronze)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
Matte White	330241MWH		MATTE WHITE	MATTE WHITE
Olde Bronze	330241OZ		WALNUT	CHERRY
Brushed Nickel	330241NI		WALNUT	SILVER

Installation requirements and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""

Electrical Requirements 120V 60Hz AC

Minimum Distance Between Bottom Of Fan Blade To Floor 7.5 feet

Control Options

Product ID	Descr
337001WH	Universal Remote Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
370040	4 Speed Rotary Switch 10 AMP

Notes:

1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.

2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.