

Sutter Place Select 52"
52 Inch Sutter Place Select Fan AP
 339211AP (Antique Pewter)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Product Information


Product ID	339211AP
Finish	Antique Pewter
Blade Finish	Light Cherry/Dark Cherry
Collection	Sutter Place Select 52"

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	160	4500	76	.49	59
Med	113	3196	114	.35	28
Low	62	1602	169	.2	10



Dimensions

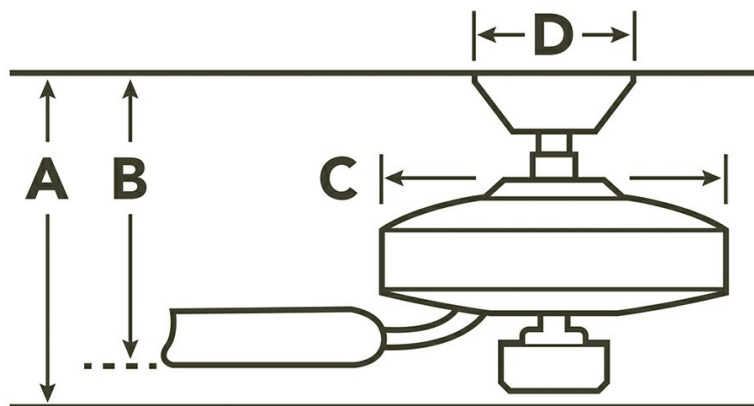

Downrod	A	B	C	D
1.00 OD X 4.00	18.00	10.75	12.00	5.25
FLUSH MOUNT	15.25	8.00	12.00	5.25

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	52"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.00
Downrod 2	FLUSH MOUNT
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes, Dual Mount Included
Lead Wire Length	78.00"
Motor Size	153MM X 15MM
Motor Type	AC

Downlight

Downlight Included	Yes
Light Source	Incandescent
Downlight Bulb Included	Included
Downlight Bulb Type	B10
Number of Lights/LEDs	3
Max or Nominal Watt	60W
Glass Description	Satin Etched
Optional Light Kit Available	No

Sutter Place Select 52"

52 Inch Sutter Place Select Fan AP

339211AP (Antique Pewter)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
Antique Pewter	339211AP	SATIN ETCHED	LIGHT CHERRY	DARK CHERRY
Oil Brushed Bronze	339211OBB	UMBER ALABASTER	WALNUT	CHERRY
Satin Natural White	339211SNW	WHITE ALABASTER	SATIN NAT WHITE	SATIN NAT WHITE
Olde Bronze	339211OZ	UMBER ETCHED	WALNUT	CHERRY
Matte White	339211MWH	WHITE ALABASTER	MATTE WHITE	MATTE WHITE
Sterling Gold	339211SGD	UMBER ETCHED	WALNUT	STERLING GOLD

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

Installation requirements
 The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked "For Fan Support"

Electrical Requirements	120V 60Hz AC
Hanging Weight	18.61 LBS

Minimum Distance Between Bottom Of Fan Blade To Floor
 7.5 feet

Control Options

Product ID	Descr
337001WH	Universal Remote Control
337010ALM	Fan 4 Speed-Light Dimmer
337010IV	Fan 4 Speed-Light Dimmer
337010WH	Fan 4 Speed-Light Dimmer
337011ALM	Fan Light Dimmer Control
337011IV	Fan Light Dimmer Control
337011WH	Fan Light Dimmer Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
371042MUL	56K Wall Control System Basic
3R400AP	CoolTouch Control System R400

Sutter Place Select 52"

52" Sutter Place Select Ceiling Fan MWH

339211MWH

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Product Information

Product ID	339211MWH
Blade Finish	Matte White/Matte White
Collection	Sutter Place Select 52"

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	160	4500	76	.49	59
Med	113	3196	114	.35	28
Low	62	1602	169	.2	10

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	52"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.00
Downrod 2	FLUSH MOUNT
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes, Dual Mount Included
Motor Size	153MM X 15MM
Motor Type	AC

Downlight


Downlight Included	Yes
Light Source	Incandescent
Downlight Bulb Included	Included
Downlight Bulb Type	B10
Number of Lights/LEDs	3
Max or Nominal Watt	60W
Glass Description	Alabaster Swirl
Optional Light Kit Available	No

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty



Dimensions

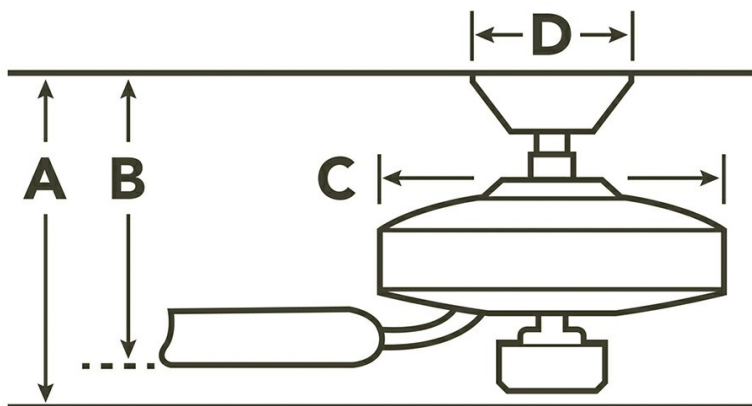

Downrod	A	B	C	D
1.00 OD X 4.00	18.00	10.75	12.00	5.25
FLUSH MOUNT	15.25	8.00	12.00	5.25

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

Kichler
 7711 East Pleasant Valley Road
 Cleveland, Ohio 44131-8010
 Toll free: 866.558.5706 or kichler.com

Notes:

- 1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
- 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

KICHLER.

Sutter Place Select 52"

52" Sutter Place Select Ceiling Fan MWH

339211MWH

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Antique Pewter	339211AP	SATIN ETCHED	LIGHT CHERRY	DARK CHERRY
Oil Brushed Bronze	339211OBB	UMBER ALABASTER	WALNUT	CHERRY
Satin Natural White	339211SNW	WHITE ALABASTER	SATIN NAT WHITE	SATIN NAT WHITE
Olde Bronze	339211OZ	UMBER ETCHED	WALNUT	CHERRY
Matte White	339211MWH	WHITE ALABASTER	MATTE WHITE	MATTE WHITE
Sterling Gold	339211SGD	UMBER ETCHED	WALNUT	STERLING GOLD

Installation

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	18.61 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
337001WH	Universal Remote Control
337010ALM	Fan 4 Speed-Light Dimmer
337010IV	Fan 4 Speed-Light Dimmer
337010WH	Fan 4 Speed-Light Dimmer
337011ALM	Fan Light Dimmer Control
337011IV	Fan Light Dimmer Control
337011WH	Fan Light Dimmer Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
371042MUL	56K Wall Control System Basic
3R400AP	CoolTouch Control System R400

Sutter Place Select 52"
52 Inch Sutter Place Select Fan OBB
 339211OBB (Oil Brushed Bronze)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Product Information

Product ID	339211OBB
Finish	Oil Brushed Bronze
Blade Finish	Walnut/Cherry
Collection	Sutter Place Select 52"

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	160	4500	76	.49	59
Med	113	3196	114	.35	28
Low	62	1602	169	.2	10

Specifications


Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	52"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.00
Downrod 2	FLUSH MOUNT
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes, Dual Mount Included
Lead Wire Length	78.00"
Motor Size	153MM X 15MM
Motor Type	AC

Downlight

Downlight Included	Yes
Light Source	Incandescent
Downlight Bulb Included	Included
Downlight Bulb Type	B10
Number of Lights/LEDs	3
Max or Nominal Watt	60W
Glass Description	Umber Alabaster
Optional Light Kit Available	No



Dimensions

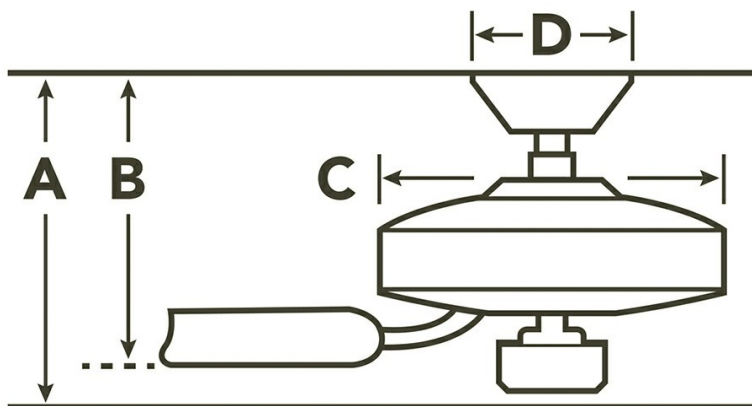

Downrod	A	B	C	D
1.00 OD X 4.00	18.00	10.75	12.00	5.25
FLUSH MOUNT	15.25	8.00	12.00	5.25

Sutter Place Select 52"

52 Inch Sutter Place Select Fan OBB

339211OBB (Oil Brushed Bronze)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
Antique Pewter	339211AP	SATIN ETCHED	LIGHT CHERRY	DARK CHERRY
Oil Brushed Bronze	339211OBB	UMBER ALABASTER	WALNUT	CHERRY
Satin Natural White	339211SNW	WHITE ALABASTER	SATIN NAT WHITE	SATIN NAT WHITE
Olde Bronze	339211OZ	UMBER ETCHED	WALNUT	CHERRY
Matte White	339211MWH	WHITE ALABASTER	MATTE WHITE	MATTE WHITE
Sterling Gold	339211SGD	UMBER ETCHED	WALNUT	STERLING GOLD

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	18.61 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
337001WH	Universal Remote Control
337010ALM	Fan 4 Speed-Light Dimmer
337010IV	Fan 4 Speed-Light Dimmer
337010WH	Fan 4 Speed-Light Dimmer
337011ALM	Fan Light Dimmer Control
337011IV	Fan Light Dimmer Control
337011WH	Fan Light Dimmer Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
371042MUL	56K Wall Control System Basic
3R400AP	CoolTouch Control System R400

Sutter Place Select 52"
52 Inch Sutter Place Select Fan OZ
 339211OZ (Olde Bronze)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Product Information

Product ID	339211OZ
Finish	Olde Bronze
Blade Finish	Walnut/Cherry
Collection	Sutter Place Select 52"

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	160	4500	76	.49	59
Med	113	3196	114	.35	28
Low	62	1602	169	.2	10

Specifications


Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	52"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.00
Downrod 2	FLUSH MOUNT
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes, Dual Mount Included
Lead Wire Length	78.00"
Motor Size	153MM X 15MM
Motor Type	AC

Downlight

Downlight Included	Yes
Light Source	Incandescent
Downlight Bulb Included	Included
Downlight Bulb Type	B10
Number of Lights/LEDs	3
Max or Nominal Watt	60W
Glass Description	Umber Etched
Optional Light Kit Available	No



Dimensions

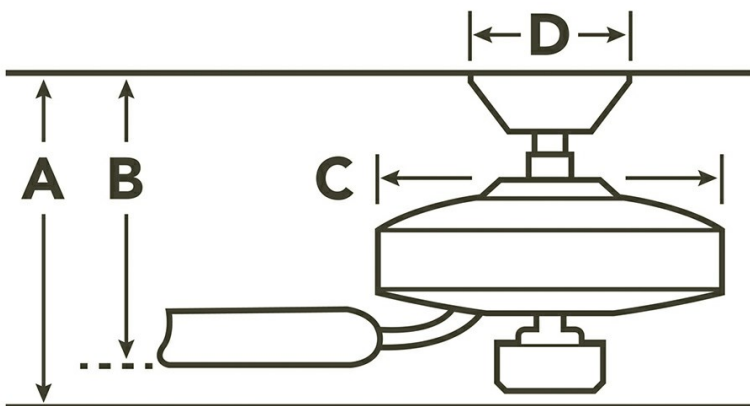

Downrod	A	B	C	D
1.00 OD X 4.00	18.00	10.75	12.00	5.25
FLUSH MOUNT	15.25	8.00	12.00	5.25

Sutter Place Select 52"

52 Inch Sutter Place Select Fan OZ

339211OZ (Olde Bronze)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
Antique Pewter	339211AP	SATIN ETCHED	LIGHT CHERRY	DARK CHERRY
Oil Brushed Bronze	339211OBB	UMBER ALABASTER	WALNUT	CHERRY
Satin Natural White	339211SNW	WHITE ALABASTER	SATIN NAT WHITE	SATIN NAT WHITE
Olde Bronze	339211OZ	UMBER ETCHED	WALNUT	CHERRY
Matte White	339211MWH	WHITE ALABASTER	MATTE WHITE	MATTE WHITE
Sterling Gold	339211SGD	UMBER ETCHED	WALNUT	STERLING GOLD

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	18.61 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
337001WH	Universal Remote Control
337010ALM	Fan 4 Speed-Light Dimmer
337010IV	Fan 4 Speed-Light Dimmer
337010WH	Fan 4 Speed-Light Dimmer
337011ALM	Fan Light Dimmer Control
337011IV	Fan Light Dimmer Control
337011WH	Fan Light Dimmer Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
371042MUL	56K Wall Control System Basic
3R400AP	CoolTouch Control System R400

Sutter Place Select 52"

52" Sutter Place Select Ceiling Fan SGD

339211SGD

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____




Product Information

Product ID	339211SGD
Blade Finish	Walnut/Sterling Gold
Collection	Sutter Place Select 52"

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	160	4500	76	.49	59
Med	113	3196	114	.35	28
Low	62	1602	169	.2	10

Dimensions

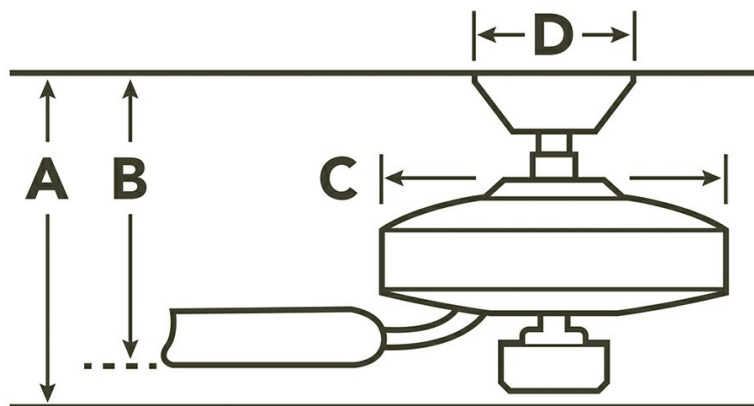

Downrod	A	B	C	D
1.00 OD X 4.00	18.00	10.75	12.00	5.25
FLUSH MOUNT	15.25	8.00	12.00	5.25

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	52"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.00
Downrod 2	FLUSH MOUNT
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes, Dual Mount Included
Motor Size	153MM X 15MM
Motor Type	AC

Downlight

Downlight Included	Yes
Light Source	Incandescent
Downlight Bulb Included	Included
Downlight Bulb Type	B10
Number of Lights/LEDs	3
Max or Nominal Watt	60W
Glass Description	Umber Etched
Optional Light Kit Available	No

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Sutter Place Select 52"

52" Sutter Place Select Ceiling Fan SGD

339211SGD

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Antique Pewter	339211AP	SATIN ETCHED	LIGHT CHERRY	DARK CHERRY
Oil Brushed Bronze	339211OBB	UMBER ALABASTER	WALNUT	CHERRY
Satin Natural White	339211SNW	WHITE ALABASTER	SATIN NAT WHITE	SATIN NAT WHITE
Olde Bronze	339211OZ	UMBER ETCHED	WALNUT	CHERRY
Matte White	339211MWH	WHITE ALABASTER	MATTE WHITE	MATTE WHITE
Sterling Gold	339211SGD	UMBER ETCHED	WALNUT	STERLING GOLD

Installation

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	18.61 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
337001WH	Universal Remote Control
337010ALM	Fan 4 Speed-Light Dimmer
337010IV	Fan 4 Speed-Light Dimmer
337010WH	Fan 4 Speed-Light Dimmer
337011ALM	Fan Light Dimmer Control
337011IV	Fan Light Dimmer Control
337011WH	Fan Light Dimmer Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
371042MUL	56K Wall Control System Basic
3R400AP	CoolTouch Control System R400

Sutter Place Select 52"

52 Inch Sutter Place Select Fan SNW

339211SNW (Satin Natural White)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Product Information

Product ID	339211SNW
Finish	Satin Natural White
Blade Finish	Satin White/Non-Reversible
Collection	Sutter Place Select 52"

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	160	4500	76	.49	59
Med	113	3196	114	.35	28
Low	62	1602	169	.2	10

Specifications


Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	52"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.00
Downrod 2	FLUSH MOUNT
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes, Dual Mount Included
Lead Wire Length	78.00"
Motor Size	153MM X 15MM
Motor Type	AC

Downlight

Downlight Included	Yes
Light Source	Incandescent
Downlight Bulb Included	Included
Downlight Bulb Type	B10
Number of Lights/LEDs	3
Max or Nominal Watt	60W
Glass Description	Alabaster Swirl
Optional Light Kit Available	No



Dimensions

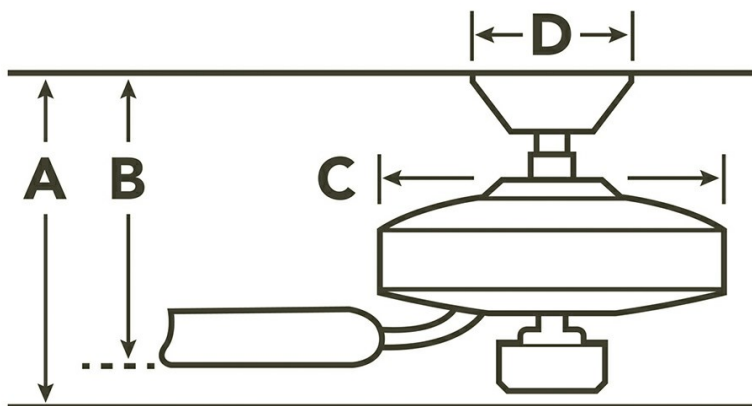

Downrod	A	B	C	D
1.00 OD X 4.00	18.00	10.75	12.00	5.25
FLUSH MOUNT	15.25	8.00	12.00	5.25

Sutter Place Select 52"

52 Inch Sutter Place Select Fan SNW

339211SNW (Satin Natural White)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
Antique Pewter	339211AP	SATIN ETCHED	LIGHT CHERRY	DARK CHERRY
Oil Brushed Bronze	339211OBB	UMBER ALABASTER	WALNUT	CHERRY
Satin Natural White	339211SNW	WHITE ALABASTER	SATIN NAT WHITE	SATIN NAT WHITE
Olde Bronze	339211OZ	UMBER ETCHED	WALNUT	CHERRY
Matte White	339211MWH	WHITE ALABASTER	MATTE WHITE	MATTE WHITE
Sterling Gold	339211SGD	UMBER ETCHED	WALNUT	STERLING GOLD

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	18.61 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
337001WH	Universal Remote Control
337010ALM	Fan 4 Speed-Light Dimmer
337010IV	Fan 4 Speed-Light Dimmer
337010WH	Fan 4 Speed-Light Dimmer
337011ALM	Fan Light Dimmer Control
337011IV	Fan Light Dimmer Control
337011WH	Fan Light Dimmer Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
371042MUL	56K Wall Control System Basic
3R400AP	CoolTouch Control System R400