


CAUTION – RISK OF SHOCK – Disconnect Power at the main circuit breaker panel or main fuse box before starting and during the installation.


CHAIN HUNG INSTALLATION

- 1) Insert recommended bulbs. (Not Supplied).
- 2) Thread the top of the threaded pipe (end with one hexnut) into the bottom of the coupling in the socket cluster.
- 3) Raise the glass, and pass hole over the threaded pipe. Rest the inside of the glass up against the bottom of the cover on the threaded pipe.
- 4) Slip the trim over the protruding pipe at the bottom of the glass.
- 5) Thread the hexnut onto the pipe to secure the glass into place. **DO NOT OVER TIGHTEN**
- 6) Thread the finial onto the pipe. **DO NOT OVER TIGHTEN.**
- 7) Thread small threaded pipe into end of second loop. Pass threaded pipe on loop up through hole in canopy.
- 8) Thread lockwasher onto end of threaded pipe protruding from inside canopy.
- 9 Thread hexnut onto threaded pipe protruding from inside canopy.
- 10) Attach one end of chain to loop on top of fixture. Attach other end of chain to small loop on canopy.
- 11) Weave electrical wire and ground wire through chain links no more than 3 inches apart.
- 12) Find the appropriate threaded holes on mounting strap that align with hole distance in canopy. Thread mounting screws into threaded holes starting from outlet box side.
- 13) Attach mounting strap to outlet box with strap mounting screws. Mounting strap can be adjusted to suit position of fixture.
- 14) Grounding instructions: (See Illus. A or B).
 - A) On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
 - B) On fixtures where a cupped washer is provided. Attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.

If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector. (Not provided.) After following the above steps. Never connect ground wire to black or white power supply wires.

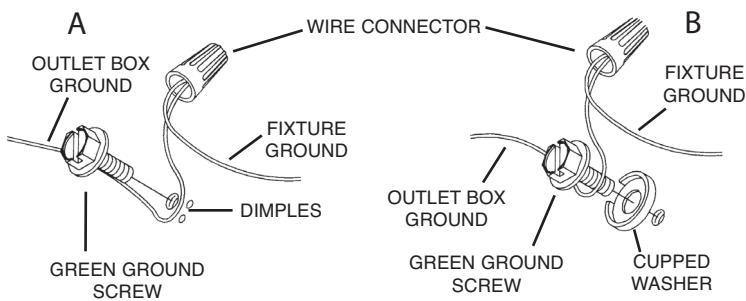

CHAIN HUNG INSTALLATION

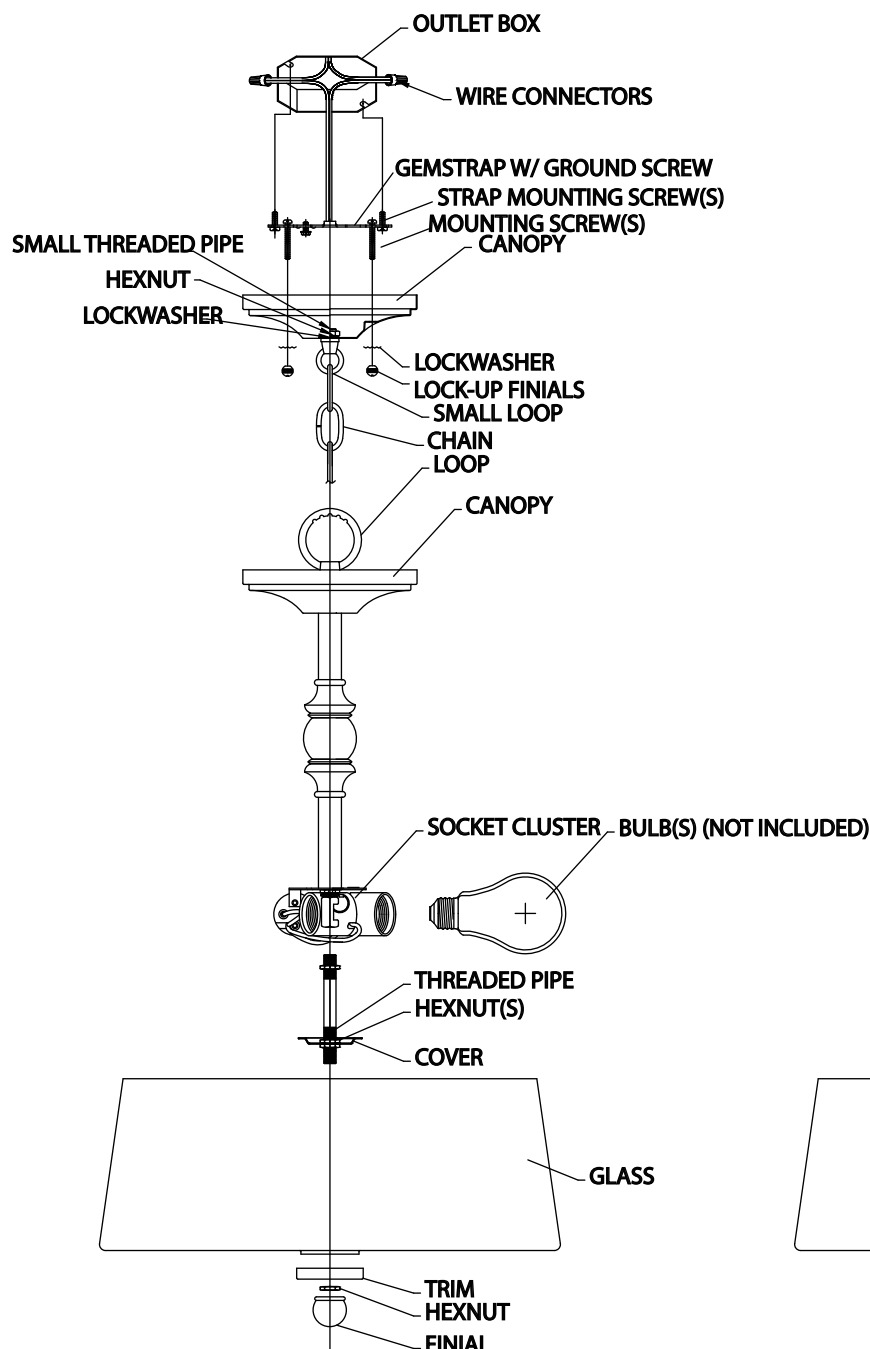


INSTRUCTIONS

For Assembling and Installing Fixtures in Canada
Pour L'assemblage et L'installation Au Canada

- 15) Make wire connections (connectors not provided.) Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



- 16) Push fixture to ceiling, carefully passing mounting screws through holes in canopy.
- 17) Thread lock-up knobs onto mounting screws. Tighten knobs to secure fixture to ceiling.

SEMI-FLUSH INSTALLATION

- 1) Follow steps 1-6 from "Chain Hung Installation".
- 2) Follow steps 12-17 from "Chain Hung Installation".

SEMI FLUSH INSTALLATION

