

59 3/4" x 32" x 19 3/4" [52 gallons]

47 9/16" 32" (813 mm) 26 5/8" (677 mm) (44 (1208 mm) 3/4" 22 [22] 3/8" 10 mm) 35/8" 5 1/4" (133 mm)⁻ 8 1/2" (216 mm)

59 3/4" (1517 mm)

53" (1346 mm)

27/8"

(73 mm)

37/8"

(98 mm)

GENERAL SPECIFICATIONS

- Acrylic thermoformed and reinforced with fiberglass
- Gloss finish resistant to stains and discoloration
- Immersion 12 3/16"
- Adjustable legs
- Weight: 70 pounds
- Textured bottom

GENERAL OPTIONS

Acrylic colors: white

biscuit* or bone* (allow 3 weeks for delivery)

Available in left or right version (integrated tiling flange)

Integrated skirt

White mood light: white, biscuit, bone or chrome finish

Handle: white, biscuit, bone or chrome finish	95.7077.106.XX
(max. 2) (submit drawing with order)	

Drain D105 (20"): chrome finish 62.4020.102.60

Black neck pillow (12" x 4") 18.6000.100.20

WHIRLPOOL OPTIONS

Finish for Whirlpool iets: white, biscuit or bone Other: chrome

Inline heater 110 V

ACTIV-AIR OPTIONS

Finish for Activ-Air jets: white, biscuit or bone Other: chrome

Blower hose extension 36"	95.5013.116.00
Blower hose extension 72"	95.5013.167.00
Blower hose extension 96"	95 5013 168 00

Blower extensions are necessary when the blower is located more than 4' from the pneumatic control.

DIMENSIONS ARE NOMINAL AND MAY VARY BY ± 1/4 "(6MM).

WEIGHT MAY VARY BY ± 5 LBS (2,3KG).

DRAWING IS NOT SCALE. THESE DIMENSIONS MAY BE CHANGED AT THE MANUFACTURER'S

CONSULT THE INSTALLATION GUIDE FOR MORE INFORMATION.



Bathtub only left drain Bathtub only right drain E10.20512.5500

E10.20512.5000



Whirlpool left drain E15.20512.550030 Whirlpool right drain E15.20512.500030

Included: 6 round jets, two air controls,

one 7.5 A (120 V) pump and one pneumatic control.



Activ-Air left drain E15.20512.550010 Activ-Air right drain E15.20512.500010

Included: 30 Activ-Air micro-jets, one blower 9.5 A (120 V) with heating element (200 W) and one pneumatic control.



Whirlpool/Activ-Air combo

E15.20512.550031

left drain

Whirlpool/Activ-Air combo E15.20512.500031

right drain

Included: 6 round jets, 29 Activ-Air micro-jets, two air controls, one 7.5 A (120 V) pump, one blower 9.5 A (120 V) with heating element (200 W) and two pneumatic controls.

: Whirlpool jets

-O: Activ-Air jets

S : Suction

T: Whirlpool control

A: Activ-Air control

P : Pump

L : Light control

Note: The blower is never installed.



COMPLIANCE ATTESTATION Standard bathtubs CAN / CSA.B45.5 Hydromassage Standards CAN / CSA.B45.10 / CSA.C22.2 / UL-1795



Certification ECORESPONSIBLE

First manufacturer of bathroom products in North America to be certified ecoresponsible






6635, Picard street, Saint-Hyacinthe (Quebec) J2S 1H3 Phone: (450) 773-7058 - Fax: (450) 773-5063 produitsneptune.com



JUNA 3260 AFR

WITH INTEGRATED TILING FLANGE AND SKIRT

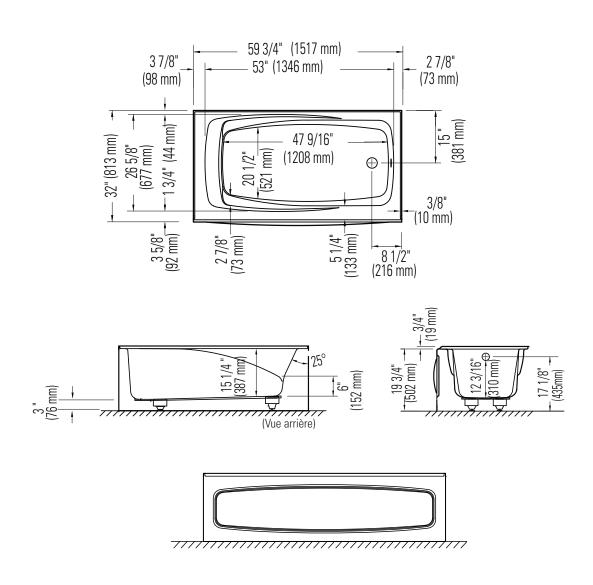

^{*}All dimensions are approximate and subject to change without notice. Please refer to the installation guide before beginning the installation.

produitsneptune.com 01-2017