


DELUXE WALL TUB SPOUT

Features

- 8-1/4" to center spout projection Max flow rate: 16 gpm (60.6 L/min) For use with StyleTherm, 3-VR or 2-VR valves
- Solid brass construction Over 30 finishes including 15 PVD finishes




D-64-64



Codes/Standards Applicable

Meets or exceeds the following at date of manufacture:

ASME A112.18.1/CSA B125.1

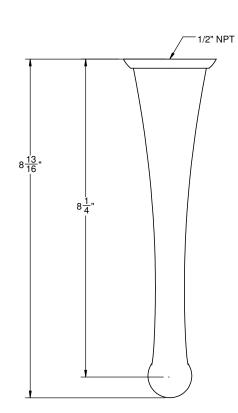

THROUGH-HOLE SPECIFICATIONS		
MIN	RECOMMENDED	<u>MAX</u>
Ø1"	Ø1-1/4"	Ø 1-5/8"

