



California Faucets®

StyleFlow™ GEO

5" MULTI-FUNCTION TRANSITIONAL


Features

- 1/2" FIP inlet
- Swiss shower technology™
- 4 functions: rain, air, booster massage & blade
- Self-cleaning rubber jets
- Solid brass pivot ball, ABS body
- 4-15/16" diameter, gray face
- Replace .FR with desired max flow rate:
SH-514.25 for 2.5 gpm
SH-514.20 for 2.0 gpm
SH-514.18 for 1.8 gpm


Codes/Standards Applicable


Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- CEC (1.8 gpm)
- DOE (2.5, 2.0, & 1.8 gpm)
- Commonwealth of MA
- EPA WaterSense (2.0 gpm)

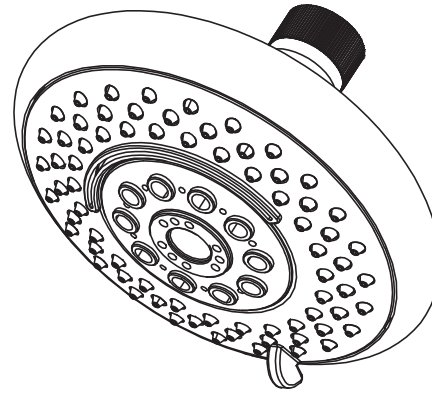

SH-514.25
SH-514.20
SH-514.18

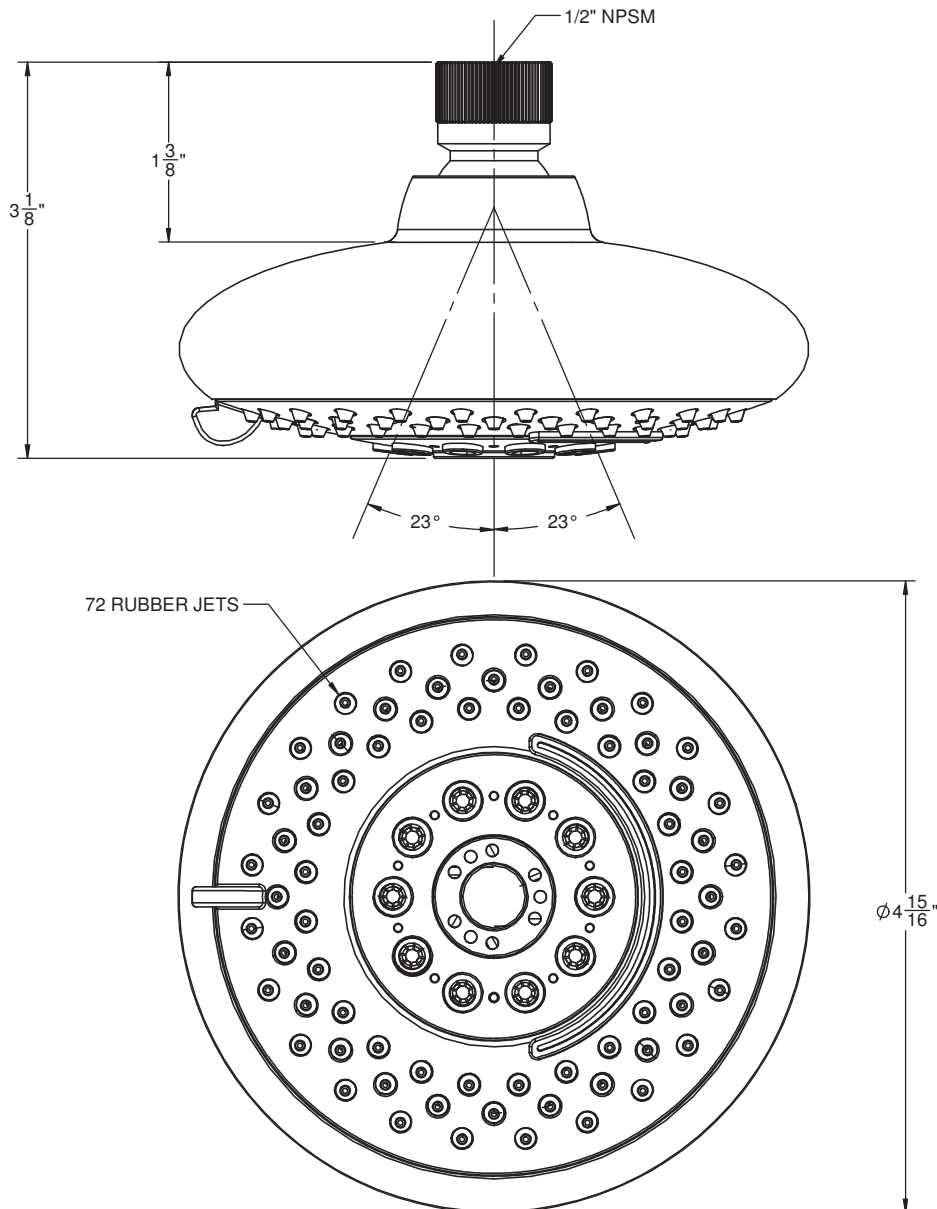

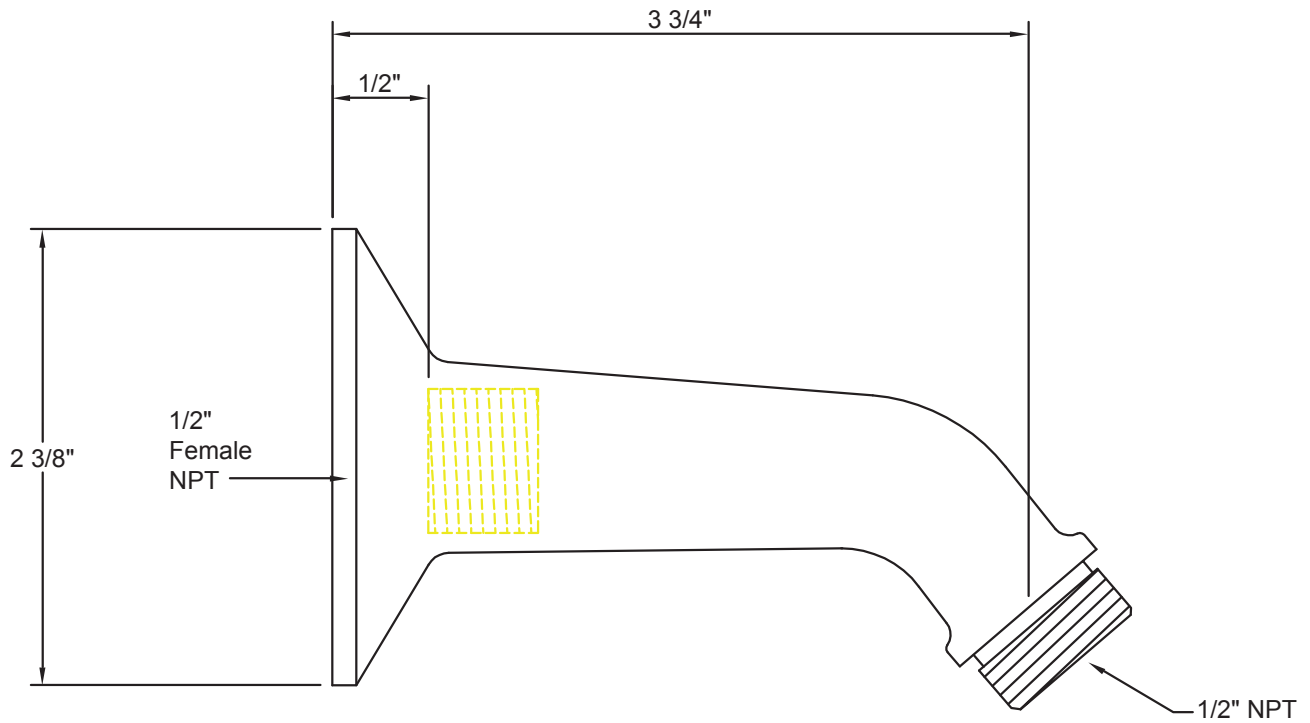

A Division of
California Faucets

Decorative Trim for Bath & Kitchen
info@calfaucets.com
www.calfaucets.com

5231 Argosy Drive
Huntington Beach, CA 92649

Tel: 714-891-7797
Fax: 714-891-2478
Toll Free: 800-822-8855

Fixture:

SH-01

Revision date: April 1, 2005

Date: October 1, 2004

Scale: None

Drawn by: William Linares
william@calfaucets.com

Technical Supervisor: Joe Mainberger