# SHOWER Traditional Exposed Thermostatic Tub and Shower System - w/Metal Handshower Handle





### **Information**

CD2.12-C2S

- Showerhead, 20" Shower Arm, Flange
- Includes Matching Handshower w/Metal Handle
- Includes 59" long shower hose
- Flow Rates: showerhead ≤2.0 max gpm, handshower ≤1.5 max gpm
- CALGreen

G-8410





### Information

- Sunflower shape
- 112 no-clog, easy-clean rubber spray nozzles
- Metal ball-joint allows for showerhead angle adjustment
- Showerhead flow rate ≤ 1.8 max gpm
- Recommend use with ceiling shower arm
- Recommended for use at no more than 10 degrees tilt
- CALGreen



Olive Bronze




Polished Chrome




Polished Nickel



Steelnox® (Satin Nickel)

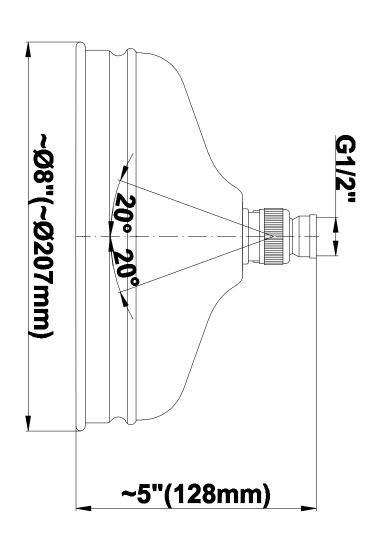



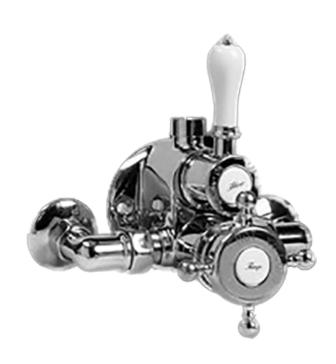



Olive Bronze



Polished Chrome





Polished Nickel



Steelnox® (Satin Nickel)

## G-8900 Exposed Thermostatic Valve

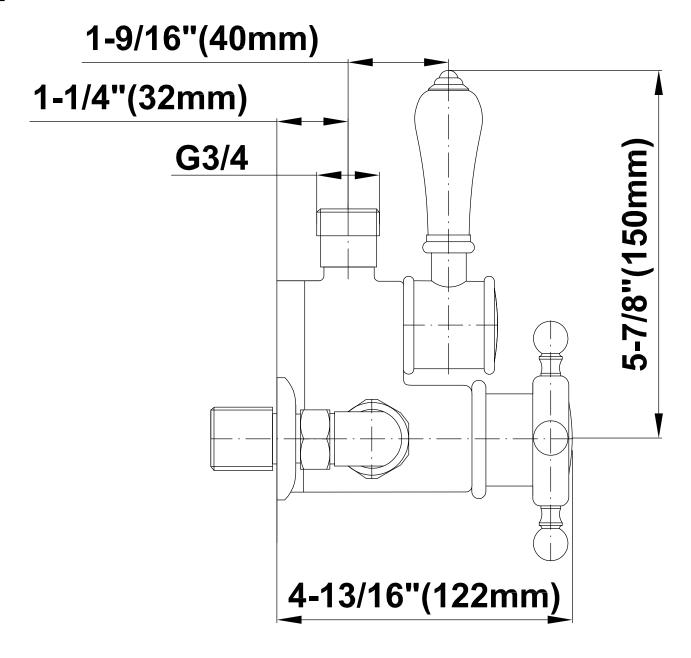

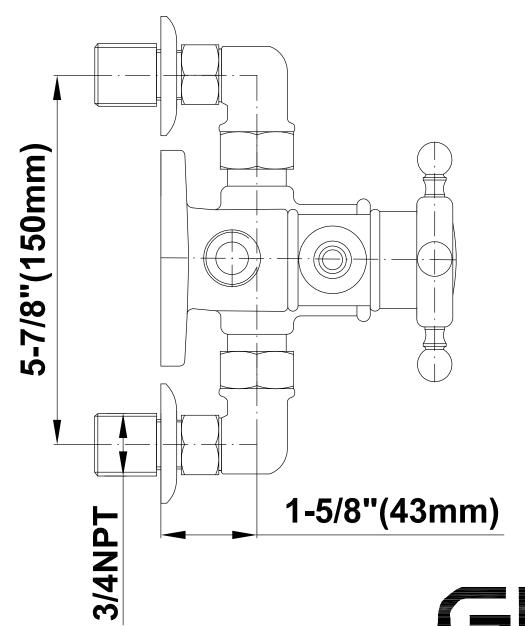





### Information

- Includes Matching Handshower w/Ceramic Handle
- Includes 59" long shower hose
- Optional Metal Handshower Handle Use code CD2.12-\*\*\*-\*\*
- CALGreen



Olive Bronze



Polished Chrome




Polished Nickel



Steelnox® (Satin Nickel)

# G-8934 Exposed Riser

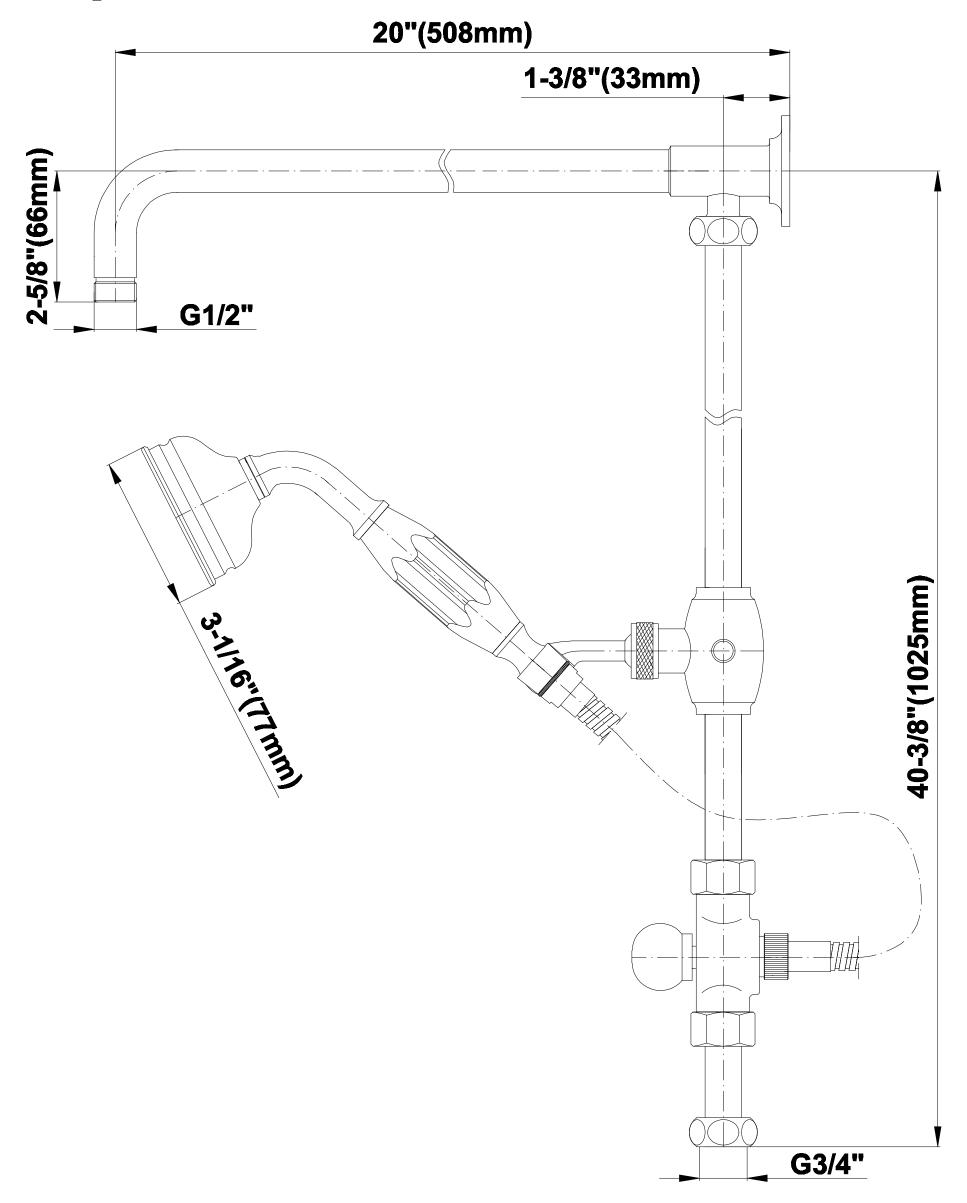



# SHOWER Traditional Exposed Thermostatic Tub and Shower System - w/Metal Handshower Handle

CD2.12-LC1S





### **Information**

- Showerhead, 20" Shower Arm, Flange
- Includes Matching Handshower w/Metal Handle
- Includes 59" long shower hose
- Flow Rates: showerhead ≤2.0 max gpm, handshower ≤1.5 max gpm
- CALGreen

G-8410





### Information

- Sunflower shape
- 112 no-clog, easy-clean rubber spray nozzles
- Metal ball-joint allows for showerhead angle adjustment
- Showerhead flow rate ≤ 1.8 max gpm
- Recommend use with ceiling shower arm
- Recommended for use at no more than 10 degrees tilt
- CALGreen



Olive Bronze




Polished Chrome




Polished Nickel



Steelnox® (Satin Nickel)

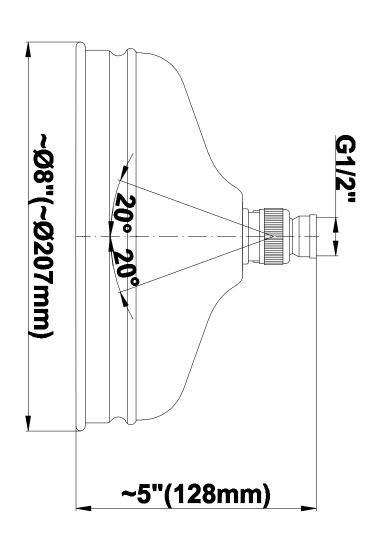



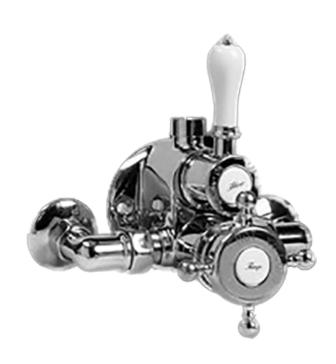



Olive Bronze



Polished Chrome





Polished Nickel



Steelnox® (Satin Nickel)

## G-8900 Exposed Thermostatic Valve

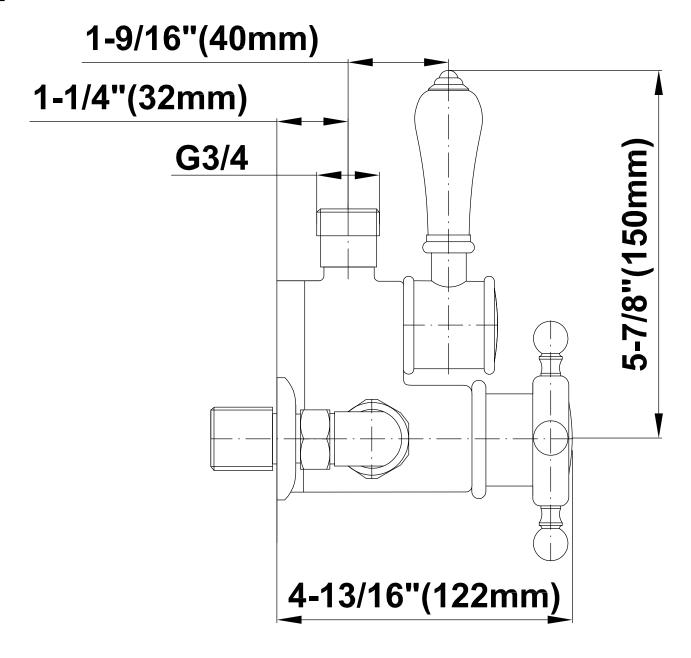

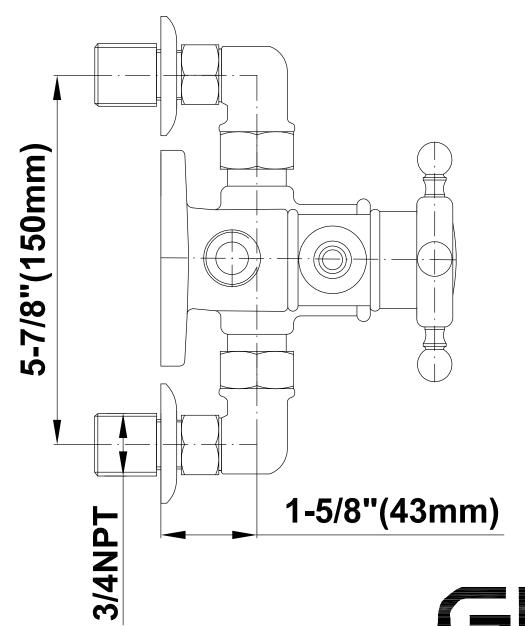





### Information

- Includes Matching Handshower w/Ceramic Handle
- Includes 59" long shower hose
- Optional Metal Handshower Handle Use code CD2.12-\*\*\*-\*\*
- CALGreen



Olive Bronze



Polished Chrome




Polished Nickel



Steelnox® (Satin Nickel)

# G-8934 Exposed Riser

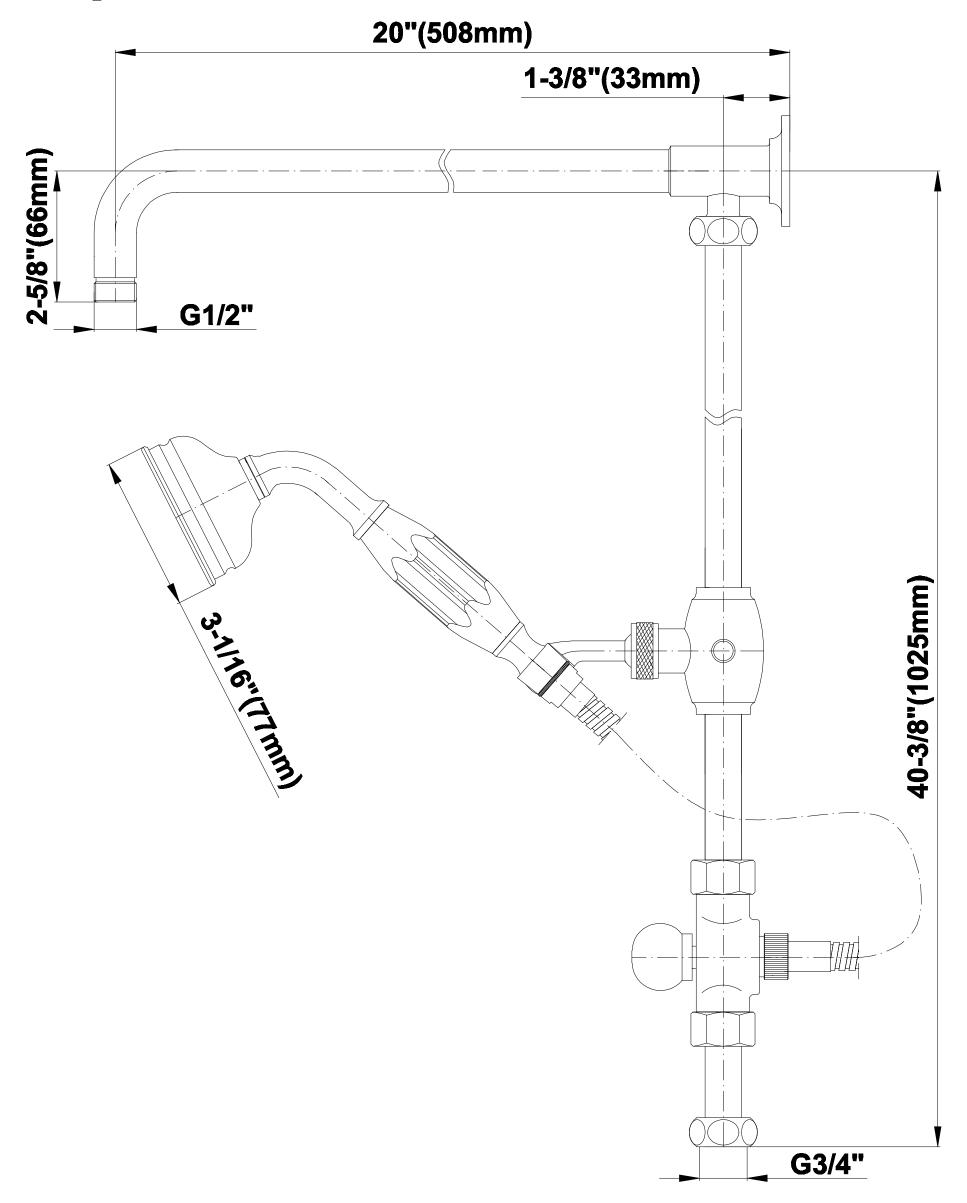



# SHOWER Traditional Exposed Thermostatic Tub and Shower System - w/Metal Handshower Handle

CD2.12-LM34S





### **Information**

- Showerhead, 20" Shower Arm, Flange
- Includes Matching Handshower w/Metal Handle
- Includes 59" long shower hose
- Flow Rates: showerhead ≤2.0 max gpm, handshower ≤1.5 max gpm
- CALGreen

G-8410





### Information

- Sunflower shape
- 112 no-clog, easy-clean rubber spray nozzles
- Metal ball-joint allows for showerhead angle adjustment
- Showerhead flow rate ≤ 1.8 max gpm
- Recommend use with ceiling shower arm
- Recommended for use at no more than 10 degrees tilt
- CALGreen



Olive Bronze




Polished Chrome




Polished Nickel



Steelnox® (Satin Nickel)

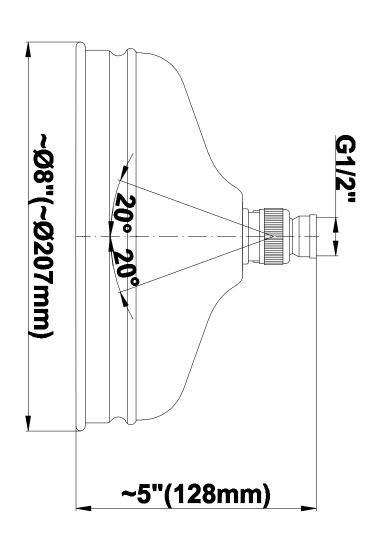



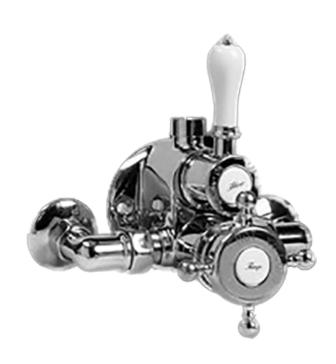



Olive Bronze



Polished Chrome





Polished Nickel



Steelnox® (Satin Nickel)

## G-8900 Exposed Thermostatic Valve

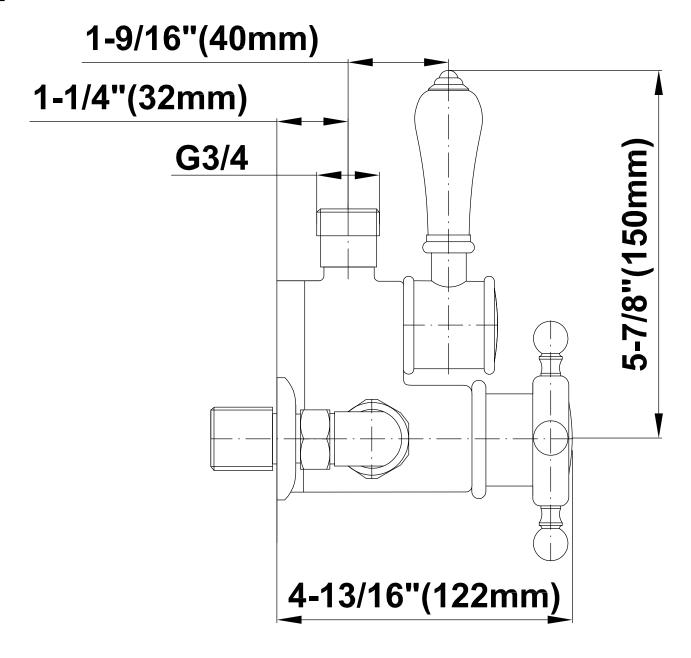

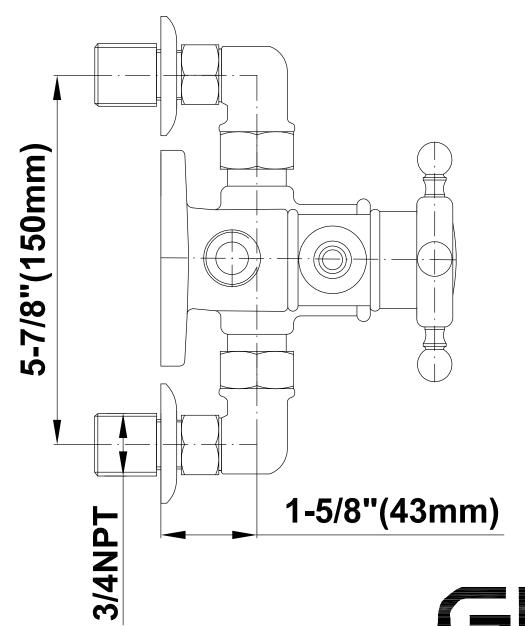





### Information

- Includes Matching Handshower w/Ceramic Handle
- Includes 59" long shower hose
- Optional Metal Handshower Handle Use code CD2.12-\*\*\*-\*\*
- CALGreen



Olive Bronze



Polished Chrome



Polished Nickel



Steelnox® (Satin Nickel)

# G-8934 Exposed Riser

