# Kraus Dex<sup>™</sup> Model KD1US25B

Kraus Dex<sup>™</sup> 25 Inch Undermount Single Bowl 16G Stainless Steel Kitchen Sink w/ Waterway and NoiseDefend<sup>™</sup> Soundproofing

**Stainless Steel** Thickness 16 Gauge Type 18/10 Antibacterial

**Bowl Configuration** Single Bowl

Installation Type Undermount

Recommended Minimum Cabinet Size 24" Front to Back 30" Left to Right

**The Big Sink - Bowl Dimensions** Front to Back: 17 1/8" Left to Right: 23"

Depth: 9"

The Big Sink - Rim Dimensions Front to Back: 18 7/8" Left to Right: 24 3/4"

**Drain Size** 3 1/2" (89mm)

Drain Location Rear Center

Recommended Dish Grid 23" Stainless Steel Kitchen Sink Grid Model No: BG2317

Antibacterial Properties99.9% reduction of bacteriaEscherichia coli

Staphyloccus



SPECIFICATION SHEET

Antibacterial Test Method KCL-FIR-1003:2011


### **Included with Product**

NoiseDefend Undercoating NoiseDefend Sound Dampening Pads Waste Fitting ST-4 Undermount Mounting Clips Installation Template US-1 Silicone Mitt KSM-1BLACK Silicone Trivet KST-1BLACK

### Warranty

Kraus Lifetime Limited Warranty

**Product Certification** cUPC (ASME A112.19.3/CSA B45.4), MASS

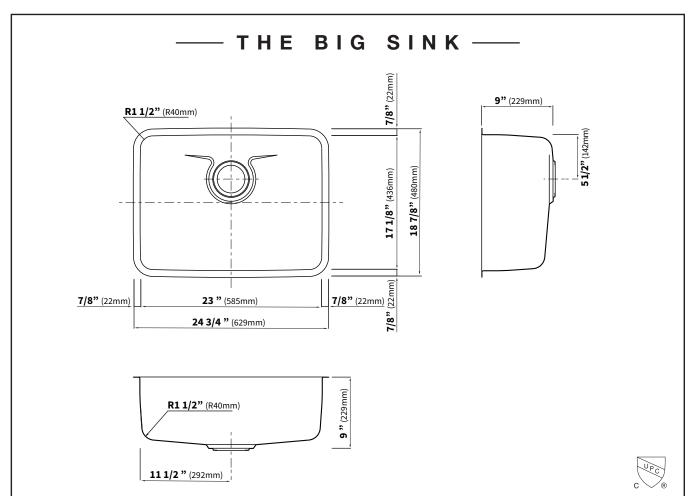

Kraus USA Customer Service Tel: 1.800.775.0703 Email: customerservice@kraususa.com

REV. August 16, 2017

# Kraus Dex<sup>™</sup> Model KD1US25B

### **KD1US25B Specification**

**Kräus**<sup>®</sup> Specification sheet

Kraus USA Model KD1US25B is a single bowl undermount kitchen sink manufactured from 16 gauge 18/10 antibacterial stainless steel. Product has a brush finished bowl bottom and satin finished bowl sides. Sink rim is satin finish, with mirror finish bowl radius opening. Sink includes NoiseDefend<sup>®</sup> undercoating and rubber sound dampening pads.

- Model KD1US25B bowl bottom has embossed Kraus waterways to channel water directly to drain. Drain is located rear center of the sink bowl.
- Waste fitting, undermount installation clips, and silicone oven mitt and trivet are also included.
- Model KD1US25B is a big sink, with sink bowl dimensions: 17 1/8"FB x 23"LR x 9"DP
- Recommended minimum cabinet size is 24"FB x 30"LR
- Model KD1US25B includes Kraus USA Lifetime Limited Warranty.

