

Floor Mount Tub Filler with Hand Shower


Hand Shower Flow Rate: 2.0 GPM

Note: Some building codes require remote pressure balance valves for anti-scald



Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings"

## WATERMYRK DESIGNS 8/31/2015

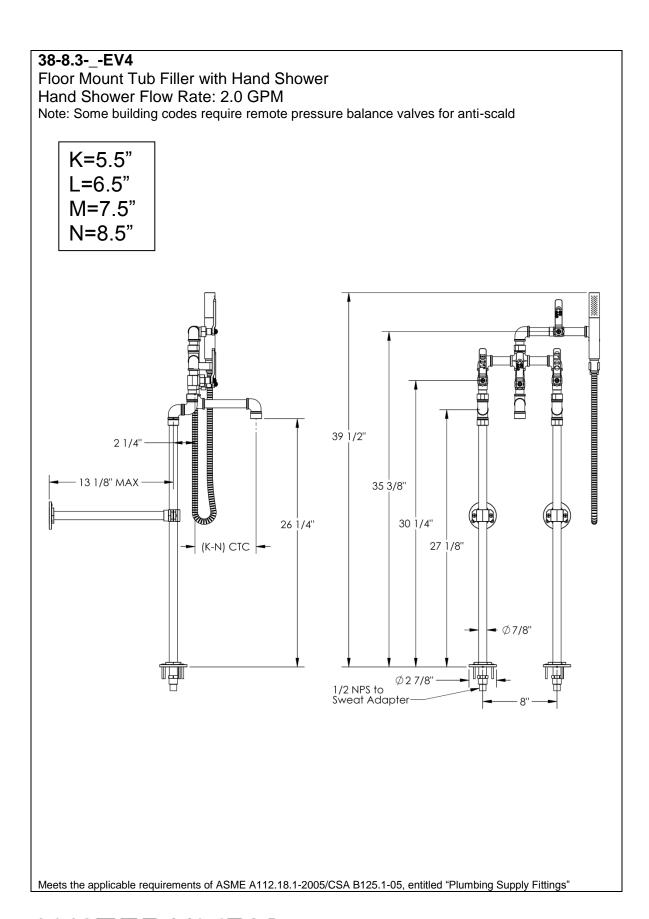

## WATERMYRK DESIGNS 8/31/2015