

Revo


INSTRUCTIONS

LAMPING

Risk of fire and electrical shock. Installation requires knowledge of electrical systems and should be installed by a qualified electrician. If not qualified, DO NOT ATTEMPT INSTALLATION.

To avoid the risk of fire or overheating, do not exceed the recommended wattage.

SHUT OFF ELECTRICAL SUPPLY AT THE CIRCUIT BREAKER

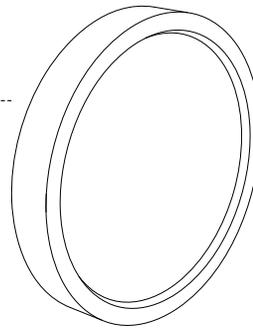

CARE INSTRUCTIONS

Wipe with a soft cloth only. Always avoid using harsh chemicals and/or cleaners.

fig. A

INSTALLATION

Detach and place the *Mounting Plate* against the junction box while allowing wires to pass through the central opening. Fasten *Mounting Plate* to junction box with the mounting screws (2) provided.

fig. B

WIRE CONNECTION

Attach the junction box GROUND WIRE to the bare copper GROUND WIRE from the fixture. Fasten with a plastic wire nut. If there is not a ground wire from the junction box, wrap the bare copper ground wire from the fixture around the green screw on the mounting bracket.

Connect the fixture's WHITE [neutral] wire to the NEUTRAL WIRE from the junction box.

Connect the fixture's BLACK [hot] wire to the HOT WIRE from the junction box.


Tuck the wired connections into the junction box and position the fixture correctly over the mounting plate. Wires must be neatly positioned for the fixture to sit properly on the mounting plate.

fig. C


Rotate the fixture clockwise until you feel it "lock" in place.

Restore power to the junction box.


A

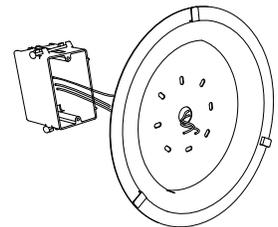

B

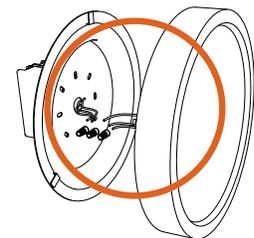

C

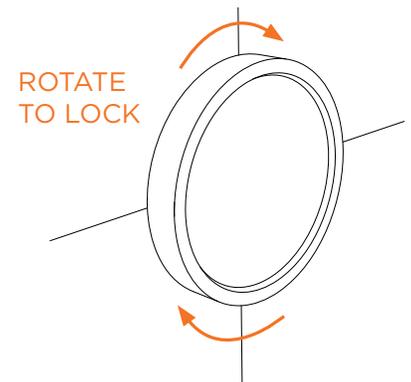

Revo

INSTRUCTIONS (CONT.)

LED LIGHT SOURCE

This fixture uses an integrated LED light source designed by AYRE specifically for this fixture. Please contact AYRE for further information if needed. This fixture will work with standard ELV, TRIAC and 0-10V LED dimming systems. Below is a short list of compatible Lutron wall dimmers although other brands of dimmers will also work.

RECOMMENDED LED DIMMER SWITCHES

LED dimming specifications are not as straight forward as incandescent dimming. You will need an LED dimmer switch to correctly control the LED modules in the fixture. DO NOT use an incandescent dimmer switch with this fixture.


USE ONLY Electronic Low Voltage dimmers (ELV), TRIAC or 0-10V dimmers.

Refer to your dimmer switch instruction manual for specifics in wiring and connecting to a light source

AYRE has tested the following dimmers:

Brand	Series
Lutron	Diva
Lutron	Maestro
Lutron	Maestro IR
Lutron	Skylark
Lutron	Nova
Lutron	Nova T
Lutron	Vareo
Lutron	Grafik T

Always consult with a certified electrician to understand the best setup for your space

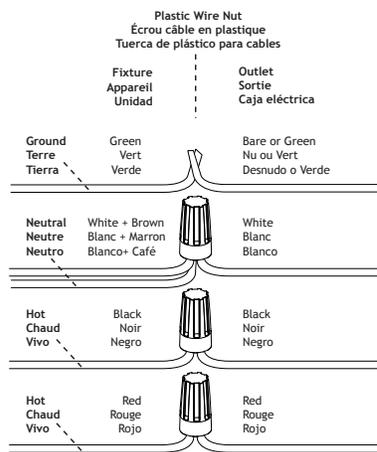

*If you are not qualified, do not attempt installation.
Always consult with a certified electrician.*