

Read & Save these Instructions Model: 62054 Installation & Operation Instructions

(1) TOOLS AND MATERIALS REQUIRED

- *** BLADE SCREW DRIVER**
- . ADJUSTABLE WRENCH
- STEP LADDER
- *** WIRE CUTTERS**
- WIRING SUPPLIES AS REQUIRED BY ELECTRICAL CODE

Attention:

Before assembling your lighting fixture, please read the following instructions. If you feel you do not have sufficient electrical experience, refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician.

(2) GENERAL

- To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
- All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code. If you are unfamiliar with methods of installing electrical wiring, secure the services of a qualified licensed electrician.
- These fixtures are intended for mounting to a standard 4" x 2 ½" deep metal octagon outlet box. The box must be directly supported by the building structure.
- Before commencing with the installation. disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.


NOTE:

The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that cannot be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture:

(3) UNPACKING THE FIXTURE

On checking the contents of the box you will find:

- · Fixture assembly
- · Checkered Glass panel
- Halogen bulb and protective tempered glass
- Mounting hardware package

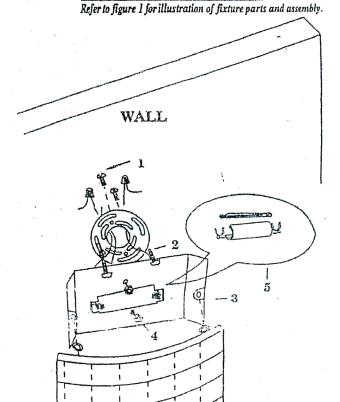

(4) PREPARE THE FIXTURE

CAUTION:

- > Ensure that the Fitting is Cool and Switched off, Before Changing the Halogen Bulb.
- Do Not use Bulbs Exceeding Maximum Wattage, As Per Caution Label.
- Do Not use lamp without the supplied Tempered Protection Glass.
- Do Not Touch the Halogen Bulb or Protective Glass while fixture is in operation.

WARNING: RISK OF FIRE MOST DWELLINGS BUILT BEFORE 1985 HAVE SUPPLY WIRE RATED 60 DEGREES. CONSULT A QUALIFIED ELECTRICIAN BEFORE INSTALLING, FOR SUPPLY CONNECTIONS USE WIRE RATED FOR AT LEAST 90 DEGREE C.