

There is more than 1 version of this model. Page down to identify the version you have.

DESCRIPTION

- · Metal construction with chrome plated finish
- 2 piece clamshell design for easy installation & maintenance
- Modern style
- Single mount
- · Vandal resistant aerator
- · Flexible stainless steel supply lines

OPERATION

- "Touch free" operation for improved hygiene
- Adjustable sensor activation distance from 3" to 12" (default 5-1/2")
- · Vandal Mode: 30 second time-out feature
- Maintenance / Cleaning Mode: Allows for a 30 second deactivation for maintenance or cleaning
- Sentinel Flow: Eliminates stagnant water supply lines every 24 hours (factory setting = off)
- Metering Mode Feature: Adjustable run time from 10 to 180 seconds (factory setting = off)
- Battery 4(AA) or AC powered
 - For AC connection: Transformer 104630 required for up to 8 devices
- · Battery level indicator with low battery warning light
- · Battery life: Up to 8 years*
- Built-in mixing-manual on/off handle (8552/8552AC models)
- · In-line filters included

FLOW

• 0.5 gpm (1.9 L/min) vandal-resistant multi-stream laminar flow

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein including NSF 61/9 & 372
- · Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA 🕭 compliant
- Meets the current requirements of the Buy American Act (BAA)

WARRANTY

· Warranted for 5 years against material or manufacturer defects

Specifications




M•Power™ Electronic Faucet Above-Deck Modern Style

Model: 8551, 8551AC (non-mixing)

NOTE: DESIGNED TO BE INSTALLED THROUGH ONE HOLE 1-1/4" MIN. DIA. (see the following page for model 8551AC)



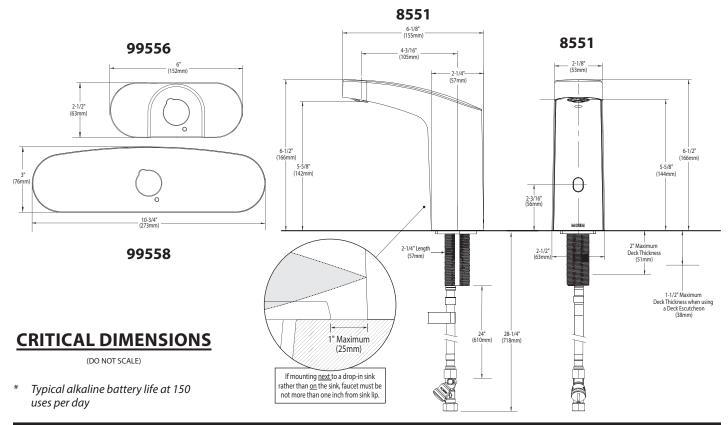



Specifications

There is more than 1 version of this model. Page down to identify the version you have. 8551AC 0 6-1/8" (155mm) 8551AC 4-3/16" (105mm) 2-1/8" (53mm) 2-1/4" (57mm) 6-1/2" (166mm) 5-5/8 1" Maximum (144mm) (25mm) If mounting <u>next</u> to a drop-in sink 2-3/16" (56mm) rather than on the sink, faucet must be not more than one inch from sink lip. 2" Maximum 2-1/2" (63mm) (57mm) Deck Thickness (F) (51mm) Length MOEN 1-1/2" Maximum Deck Thickness when using a Deck Escutcheon (38mm) **AC Transformer** Dep Velle Depte **104630** (Sold separately) 12" (Powers up to 8 devices; (305mm) see 104630 specifications) (F) 24" (610mm) 28-1/4" (718mm) 18AWG, Dual-Strand Cable -2-3/8" (Not supplied) (60mm) 2-5/8' Wire Nuts (Not supplied) -/Black 6-1/8" (156mm) +/Gray AC Connection Cable (4") 182538 (Included with every AC SKU) MOEN 0 **Power Connection** Extension (18") 174057 (Optional) **CRITICAL DIMENSIONS** (Included with every AC SKU) (DO NOT SCALE)



Models prior to September, 2017

DESCRIPTION

- · Metal construction with chrome plated finish
- 2 piece clamshell design for easy installation & maintenance
- Modern style
- · Single mount
- Vandal resistant aerator
- Flexible stainless steel supply lines

OPERATION

- · Adjustable sensor activation distance
- · Vandal Mode: 30 second time-out feature
- Sentinel Flow: Eliminates stagnant water in supply lines every 24 hours (factory settings – off)
- Maintenance / Cleaning Mode: Allows for a 30 second deactivation for maintenance or cleaning
- Battery 4(AA) or AC powered
- Low battery indicator light
- Battery life: Up to 6 years or 350,000 cycles*
- Built-in mixing-manual on/off handle (8552/8552AC models)
- In-line filters included

FLOW

• 0.5 gpm (1.9 L/min) vandal-resistant multi-stream laminar flow

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- · Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA 💪 compliant

WARRANTY

• Warranted for 5 years against material or manufacturer defects

Specifications




M•Power™ Electronic Faucet Above-Deck Modern Style

Model: 8551, 8551AC (non-mixing)

NOTE: DESIGNED TO BE INSTALLED THROUGH ONE HOLE 1-1/4" MIN. DIA. (see the following page for model 8551AC)



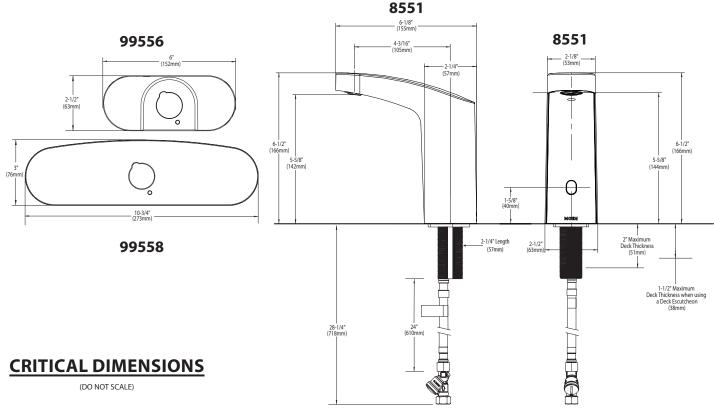

Typical alkaline battery life at 150 uses per day



Specifications

