

# Specifications

## DESCRIPTION

- Brass spout and metal handle construction with Chrome finish
- 3/8" compression stainless steel supply lines
- No lift rod hole in models without drain
- Vandal resistant aerator and handle assembly
- Red and Blue plastic indicator inserts

## OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel

## FLOW

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
  - 1.2 gpm max (4.5L/min) at 60 psi

## CARTRIDGE


- 1255 Duralast™ cartridge with brass adjustable temperature limit stop
- Nonmetallic/nonferrous and ceramic material

## STANDARDS

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handle

## WARRANTY


- Warranted for 5 years against material or manufacturing defects



**M•Dura™**  
**Single-Handle Lavatory Faucet**

Model	Flow (gpm)	Drain	WaterSense®
9417F12	1.2	Without	X
9419F12	1.2	All Metal	X

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/4" MIN. DIA.

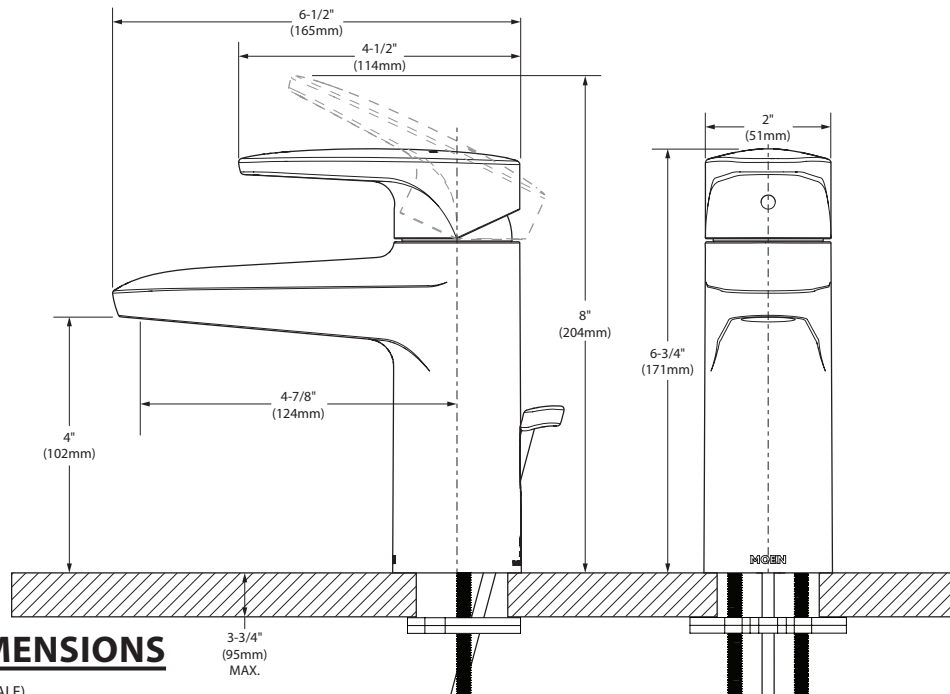

## CRITICAL DIMENSIONS

(DO NOT SCALE)

# Specifications

## DESCRIPTION

- Brass spout and metal handle construction with Chrome finish
- 3/8" compression stainless steel supply lines
- No lift rod hole in models without drain
- Vandal resistant aerator and handle assembly
- Red and Blue plastic indicator inserts

## OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel

## FLOW

- Standard aerator is limited to 1.5 gpm max (5.7 L/min)
- Eco-performance aerator is limited to 0.5 gpm max (1.9 L/min)

## CARTRIDGE


- 1255 Duralast™ cartridge with brass adjustable temperature limit stop
- Nonmetallic/nonferrous and ceramic material

## STANDARDS

- Third party certified to meet WaterSense® (only applies to 1.5 gpm), ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9 & 372
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA for lever handles

## WARRANTY

- Warranted for 5 years against material or manufacturing defects




**M•Dura™**  
**Single-Handle Lavatory Faucet**

Model	Flow (gpm)	Drain	WaterSense®
9417F15	1.5	Without	X
9417F05	0.5	Without	
9419	1.5	All Metal	X
9419F05	0.5	All Metal	

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/4" MIN. DIA.



See table above

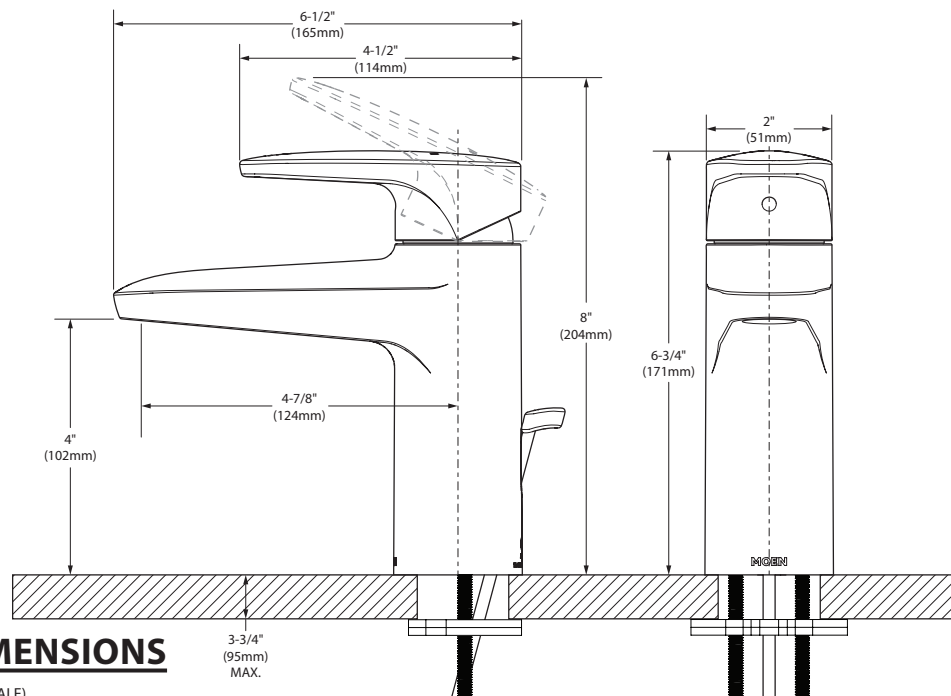

## CRITICAL DIMENSIONS

(DO NOT SCALE)