
1

Systems for Wall-Hung Toilets for Sigma 2x6 Installation

Geberit Duofix Carrier, Sigma 2x6 Installation

| lodel No. | Description | List Price | | | |
|-------------|---|------------|--|--|--|
| 11.335.00.5 | Carrier frame with 1.60/0.8 GPF Sigma Concealed Tank | \$519.00 | | | |
| 11.902.00.5 | Carrier frame with 1.28/0.8 GPF Sigma Concealed Tank | \$519.00 | | | |

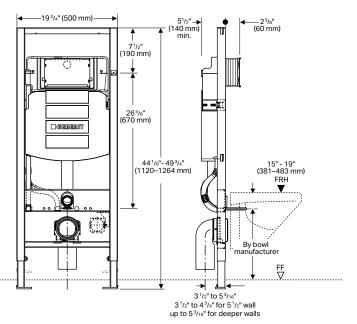

NOTES:

- 1. Concealed tank shipped dual-flush ready
- 2. Geberit Duofix Carrier for 2-hole washdown style wall-hung toilet fixtures only
- 3. Refer to → **geberit.us** for latest list of code approved compatible toilet fixtures, including certified WaterSense® combinations

Note: For System Accessories see pages 16-18.

| Style | Material | tors, Sigma 2x6 Installation Finish | Model No. | List Price |
|----------------------|-----------|--|------------------------------|-----------------|
| Sigma01 | Plastic | Alpine White | 115.770.11.5 | \$89.00 |
| | | Polished Chrome | 115.770.21.5 | 121.00 |
| $ \mathcal{O} $ | | Matte Chrome | 115.770.46.5 | 121.00 |
| | | | | |
| Sigma20 | Metal | Br Ni-Polished Ni-Br Ni* | 115.882.ID.1 | 251.00 |
| | | Br SS-Polished SS-Br SS* | 115.882.SN.1 | 252.00 |
| 00 | | Br Ni-Polished Ni-Br Ni* VR | 115.889.ID.1 | 290.00 |
| | | Br SS-Polished SS-Br SS* VR | 115.889.SN.1 | 290.00 |
| | Plastic | Polished Chr-Matte Chr- Polished Chr* | 115.882.KH.1 | 187.00 |
| | | White-Polished Chrome-White* | 115.882.KJ.1 | 129.00 |
| | | White-Polished Gold-White* (Effective 4/21/17) | 115.882.KK.1 | 450.00 |
| | | White-Matte Chr-Matte Chr* | 115.882.KL.1 | 159.00 |
| | | Black-Polished Chrome-Black* | 115.882.KM.1 | 159.00 |
| | | Matte Chr-Pol Chr-Matte Chr* | 115.882.KN.1 | 187.00 |
| Sigma30 | Plastic | Polished Chr-Matte Chr- Polished Chr*** | 115.883.KH.1 | 210.00 |
| | | White-Polished Chrome-White*** | 115.883.KJ.1 | 131.00 |
| | | White-Polished Gold-White*** | 115.883.KK.1 | 170.00 |
| | | White-Matte Chr-Matte Chr*** | 115.883.KL.1 | 170.00 |
| | | Black-Polished Chrome-Black*** | 115.883.KM.1 | 170.00 |
| | | Matte Chr-Polished Chr- Matte Chr*** | 115.883.KN.1 | 210.00 |
| Sigma50 | Die Cast | Customer supplied inlay | 115.788.00.5 | 366.00 |
| | | Alpine White | 115.788.11.5 | 366.00 |
| | | Polished Chrome | 115.788.21.5 | 472.00 |
| | | Black | 115.788.DW.5 | 366.00 |
| | | Brushed Chrome | 115.788.GH.5 | 472.00 |
| | | Smoke Glass | 115.788.SD.5 | 472.00 |
| | | Green Satin Glass | 115.788.SE.5 | 472.00 |
| 0: 00† | D: 0 . | Umber Glass | 115.788.SQ.5 | 472.00 |
| Sigma60 [†] | | Brushed chrome | 115.640.GH.1 | 618.00 |
| | Glass | White Glass | 115.640.SI.1 | 618.00 |
| سلسا | | Black Glass | 115.640.SJ.1 | 618.00 |
| | | Umber Glass Rough-in set | 115.640.SQ.1 243.168.00.1 | 618.00 16.00 |
| | | (REQUIRED accessory) | | |
| | | Cover frame (optional accessory) Polished Chrome | 115.641.21.1 | 160.00 |
| | | Cover frame (optional accessory) Brushed Chrome | 115.641.GH.1 | 160.00 |
| Sigma70 | | Customizable | 115.620.00.1 | 523.00 |
| | Metal | Br SS | 115.620.FW.1 | 694.00 |
| | Glass | White Glass | 115.620.SI.1 | 612.00 |
| | | Black Glass | 115.620.SJ.1 | 612.00 |
| | | Umber Glass | 115.620.SQ.1 | 612.00 |
| Single-F | lush Acti | uators, Sigma 2x6 Installatio | n & | |
| Sigma10 [‡] | Metal | Br SS | 115.758.SN.5 | \$252.00 |
| | | Br SS VR | 115.787.SN.5 | 286.00 |
| 0 | Plastic | Polished Chr-Matte Chr- Polished Chr* | 115.758.KH.5 | 187.00 |
| | | White-Polished Chrome-White* | 115.758.KJ.5 | 130.00 |
| | | White-Polished Gold-White* | 115.758.KK.5 | 371.00 |
| | | White-Matte Chr-Matte Chr* | 115.758.KL.5 | 159.00 |
| | | Black-Polished Chrome-Black* | 115.758.KM.5 | 159.00 |
| | | | | |

115.758.KN.5

115.893.45.1

115.893.KJ.1

115.893.KX.1

115.893.KY.1

187.00

594.00

246.00

361.00

361.00

Matte Chr-Pol Chr-Matte Chr*

White-Polished Chr-White***

Pol Chr-Br Chrome-Pol Chr***

Br Chrome-Pol Chr-Br Chrome***

Sigma30[‡] Die Cast Polished Gold***

Hands-Free Actuators and Transformer, Sigma 2x6 Installation



| Style | Material | Finish | Model No. | List Price |
|-----------------------|--|--|--------------|------------|
| Sigma ₁₀ ‡ | 10 [‡] Metal Br SS (AC Power) | | 115.890.SN.5 | \$858.00 |
| | Single- | Br SS (Battery/DC Power) | 115.891.SN.5 | 858.00 |
| | Flush | | | |
| Sigma80 | Glass | Black (AC Power) | 116.090.SG.1 | 1,448.00 |
| | Dual- | Mirror (AC Power) | 116.090.SM.1 | 1,448.00 |
| annum ererer | Flush | | | |
| (| | Connection cable (optional accessory) length 78–3/4" (2 m) | 242.658.00.1 | 42.00 |
| | D D | Extension mains cable (optional accessory for Sigma10 and Sigma80) length 78–3/4" (2 m) | 241.831.00.1 | 58.00 |
| | | Transformer for AC powered hands-free actuator. (For Sigma10 and Sigma80) | 115.861.00.1 | 145.00 |

Dual-Flush Buttons for Concealed Installations,

| Sigma 2x | (6 mstai | lation | | |
|-----------------|----------|--------------------------------|--------------|----------|
| Type 01 Plastic | | Alpine White | 116.042.11.1 | \$119.00 |
| (1) | | Polished Chrome | 116.042.21.1 | 154.00 |
| | | | | |
| @ | Plastic | Alpine White 🕭 | 116.044.11.1 | 119.00 |
| | | | | |
| Type 10 | Plastic | Matte Chr-Polished Chr** | 116.055.KH.1 | 170.00 |
| (| | Polished Chrome-White** | 116.055.KJ.1 | 154.00 |
| O | | | | |
| Type 70 | Metal | Br SS 🕭 | 115.630.FW.1 | 782.00 |
| | Glass | White Glass 🕹 | 115.630.SI.1 | 664.00 |
| | | Black Glass & | 115.630.SJ.1 | 664.00 |
| | | Umber Glass & | 115.630.SQ.1 | 664.00 |
| Rectangle | Plastic | Polished Chrome-Matte Chrome** | 115.932.KA.1 | 154.00 |
| | Metal | Brushed Chrome | 115.932.GH.1 | 243.00 |
| - | | | | |
| | Plastic | Polished Chrome 🖶 | 115.934.21.1 | 154.00 |

Dual-Flush Buttons for Furniture Installations, Sigma 2x6 Installation

| Plastic | Alpine White | 116.050.11.1 | \$119.00 |
|---------|--------------------------|---|-----------------|
| | Polished Chrome | 116.050.21.1 | 154.00 |
| | Matte Chrome | 116.050.46.1 | 154.00 |
| Plastic | Matte Chr-Polished Chr** | 116.057.KH.1 | 170.00 |
| | Polished Chrome-White** | 116.057.KJ.1 | 154.00 |
| | | Polished Chrome Matte Chrome Plastic Matte Chr-Polished Chr** | Polished Chrome |

Single-Flush Buttons for Concealed Installations, Sigma 2x6 Installation

| <i>y</i> , | Plastic | Alpine White | 116.040.11.1 | \$101.00 |
|------------|---------|-----------------|--------------|----------|
| 0 | | Polished Chrome | 116.040.21.1 | 119.00 |
| | | | | |

- * Finishes follow this pattern = Plate-Ring-Button
- ** Finishes follow this pattern = Frame-Button
- *** Finishes follow this pattern = Frame-Button Edge Trim-Button
- † Note: For tile, stone or other hard surfaced walls only!
- ‡ Not intended to be sold in California

VR = Vandal Resistant

Br SS = Brushed Stainless Steel

Br Ni = Brushed Nickel

Products marked with 👢 comply with the American Disabilities Act (ADA) when installed per the requirements of the latest ADA Accessibility Guidelines (ADAAG) and/or ICC/ANSI A117.1.

Cover Plates for Sigma Concealed Tank, Sigma 2x6 Installation, for use with Flush Buttons

| Style | Material | Finish | Model No. | List Price |
|-------|----------|-----------------|--------------|------------|
| | Glass | White | 115.766.SI.1 | \$205.00 |
| | Metal | Br SS | 115.764.FW.1 | 164.00 |
| | | Customizable | 115.766.00.1 | 164.00 |
| | Plastic | Alpine White | 115.768.11.1 | 71.00 |
| | | Polished chrome | 115.768.21.1 | 94.00 |
| | | Matte Chrome | 115.768.46.1 | 94.00 |

Surface Even Cover Plates for Sigma Concealed Tank, 2x6 Installation, for use with Flush Buttons

| IIIStalia | tion, for t | use with Hush Duttons | | |
|-----------|-------------|---|--------------|----------|
| | Plastic | Customizable + rough-in kit† | 115.698.00.1 | \$205.00 |
| | | Customizable with frame + rough-in kit [†] | 115.699.00.1 | 258.00 |

Note: Includes required accessory kit 243.168.00.1

The information and pricing in this document are subject to change without notice.


GEBERIT REPLACEMENT PARTS

Replacement Parts

Geberit Duofix Carrier 111.335.00.5 and 111.902.00.5, Sigma 2x6 Installation

| Item | Model No. | Description | List Price |
|------|---------------------------------|---|------------|
| 1 | 242.314.00.1 | Materials for Concealed Carrier and Tank installation | \$40.00 |
| 2 | 242.315.00.1 | Splash guard protection cover for Sigma Concealed Tank | 6.00 |
| 3 | 243.345.00.1 or 243.168.00.1 | Mud guard protection housing for Sigma Concealed Tanks 2x6 and 2x4, plastic | 16.00 |
| 4 | 362.771.00.1 | Seal for concealed flush pipe, EPDM | 2.00 |
| 5 | 362.796.92.1 | Protection plug, plastic | 5.00 |
| 6 | 240.189.00.1 | Threaded rod for wall-mounted toilet or bidet installation | 4.00 |
| 7 | 152.404.46.1 | Connector set with mounting hardware (bowl installation kit), HDPE; Matte Chrome cover caps | 42.00 |
| 7.1 | 217.713.46.1 | Cover caps with leveling washer, plastic, Matte Chrome | 7.00 |
| 7.2 | 119.668.00.1 | Seal for supply inlet tube, EPDM | 2.00 |
| 7.3 | 152.424.00.1 | Seal for toilet outlet connector, EPDM | 3.00 |
| 8 | 366.061.16.1 | HDPE waste fitting outlet bend, 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping and Ø3.50" (Ø90 mm) outlet | 22.00 |
| 8.1 | 387.282.00.1 | Seal for outlet bends, EPDM | 5.00 |
| 9 | 366.820.92.1 | Protection plug, plastic | 4.00 |

| Item | Model No. | Description I | ist Price |
|------|--------------|--|-----------|
| 10 | _ | Flexible coupling FERNCO 3005-33 | _ |
| 11 | 242.012.00.1 | Outlet pipe bracket (complete) | \$4.00 |
| 12 | 242.886.00.1 | Conduit pipe for shower toilet water supply with Sigma Concealed Tank 2x6, Omega Concealed Tank or Kappa Concealed Tank (from 2013 on) | 10.00 |
| 13 | 111.892.00.1 | Frame mounting screws for steel stud construction, galvanized, self-tapping | 6.00 |
| 14 | 240.853.00.1 | Supply angle stop (black handle) | 14.00 |
| 14.1 | 240.851.00.1 | Drop ear elbow, copper | 11.00 |
| 15 | 240.921.00.1 | Connection hose for Sigma Concealed Tank, 3/8" | 14.00 |
| 15.1 | 240.922.00.1 | Seal kit for braided hose, EPDM O-ring | 9.00 |
| 16 | 240.923.00.1 | Fixation clip for filling valve | 6.00 |
| 17 | 241.469.00.1 | Filling valve Type 380 for Sigma, Omega and Kapp Concealed Tanks | a 26.00 |
| 17.1 | 240.771.00.1 | Seal kit for filling valve Type 380 | 11.00 |
| 18A | 243.725.00.1 | 1.28/0.8 GPF dual-flush valve for Sigma Concealed Tank | 14.00 |
| 18B | 240.622.00.1 | 1.6/0.8 GPF dual-flush valve for Sigma Concealed Tank | 14.00 |
| 18.1 | 241.167.00.1 | Yoke set for flush valves | 9.00 |
| 18.2 | 816.418.00.1 | Flat gasket for flush valve | 2.00 |
| 19 | 241.859.00.1 | Valve seat basket and noise bushing for flush valve | 10.00 |
| 19.1 | 241.868.00.1 | U-cup seal for valve basket | 2.00 |
| 20 | 241.829.00.1 | Flush actuator gear box | 6.00 |
| 21 | 240.269.00.1 | Angle stop valve to concealed tank (blue handle) | 17.00 |
| 21.1 | 240.298.00.1 | Spindle to angle stop valve | 13.00 |
| 21.2 | 240.347.00.1 | Handle for angle stop valve (blue) | 4.00 |
| 21.3 | 241.857.00.1 | Counter nut, plastic | 4.00 |

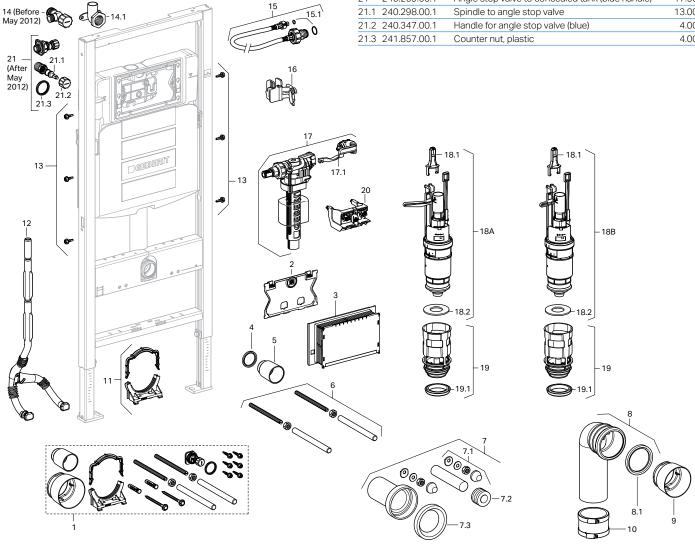

System Accessories

Geberit Optional and Required Accessories for Installation



111.335 111.798 111.012

| Description | | Model Number | List Price | | 111.798 | | | 111.524 | 111.490 | 111.625 | 109.304 |
|--|---|--------------|---------------|----------|----------|--------------|----------|----------|----------|----------|----------|
| OPTIONAL Conn | ection Sets and Accessories for Fi | nished Walls | up to 3.5" (| 9cm) Th | ick | | | | | | |
| | Connector set with mounting hardware (bowl installation kit), HDPE; Alpine White cover caps | 152.404.11.1 | \$42.00 | ✓ | ✓ | √ | | | | | |
| | PE syphon trap with horizontal outlet and seal; Ø1.96" (Ø50 mm) outlet | 152.950.11.1 | 35.00 | | | | | | | ✓ | |
| | PE syphon trap with vertical outlet and seal; Ø1.97" (Ø50 mm) outlet | 152.951.11.1 | 35.00 | | | | | | | ✓ | |
| 0,000 | Acoustic insulation set for wall-hung toilets and bidets | 156.050.00.1 | 18.00 | ✓ | √ | √ | ✓ | ✓ | | | |
| O OO | Cover caps with leveling washer, plastic, Alpine White | 217.713.11.1 | 7.00 | √ | ✓ | \checkmark | √ | ✓ | ✓ | | |
| | HDPE connection set with 1" (2.5 cm) offset and mounting hardware (bowl installation kit); with socket for Ø3.50" (Ø90 mm) push fit piping and Ø55 supply inlet; Matte Chrome cover caps | 405.116.00.1 | 218.00 | ✓ | ✓ | √ | | | | | ✓ |
| REQUIRED Conn | ection Sets and Accessories for Fi | nished Walls | 3.5" - 7.0" (| 9-18cm) | Thick | | | | | | |
| 00000000000000000000000000000000000000 | HDPE Connector set for extended installation and mounting hardware (bowl installation kit), with socket for Ø3.50" (Ø90 mm) push fit piping and Ø2.16" (Ø55 mm) supply inlet; Matte Chrome cover caps | 152.438.46.1 | 54.00 | ✓ | √ | √ | | | | | ✓ |
| 444 | Extension set for actuator plates for Sigma Concealed Tanks 2x6 and 2x4, Kappa and Omega Concealed Tanks | 240.938.00.1 | 22.00 | ✓ | ✓ | √ | | | | | ✓ |
| | Mud guard protection housing for Sigma Concealed Tanks 2x6 and 2x4, plastic, 4 inch (10 cm) | 241.826.00.1 | 13.00 | ✓ | √ | | | | | | ✓ |
| | Mud guard protection housing and extension set for urinal carrier | 241.930.00.1 | 19.00 | | | | | | | ✓ | |
| | Mounting rod M12 x 10" long. Not supplied. | M12 x 10" | _ | ✓ | ✓ | ✓ | ✓ | ✓ | | | |
| | Mounting rod M10 x 10" long. Not supplied. | M10 x 10" | _ | | | | | | √ | | |
| | Mounting rod M8 x 10" long. Not supplied. | M8 x 10" | | | | | | | | ✓ | |
| | | | | | | | | | | | |

Geberit Optional and Required Accessories for Installation



111.335 111.798 111.012

| | | | 111.555 111.756 111.012 |
|-------------|--------------|------------|---|
| Description | Model Number | Liet Drice | 111 002 111 507 111 019 111 520 111 524 111 400 111 625 100 304 |

| Description | | Model Number | List Price | | 111.597 | | 111.520 | 111.524 | 111.490 | 111.625 | 109.304 |
|--|---|--------------|------------|----------|----------|--------------|----------|----------|----------|----------|----------|
| OPTIONAL Installation Accessories for Bidet Seats | | | | | | | | | | | |
| | Water supply hose for bidet seat for Kappa and Omega Concealed Tank pre-wall. For adding bidet seat to an installed carrier. For complete installation, must order with 249.801.00.1. | 240.839.00.1 | \$57.00 | | | √ | | | | | |
| | Water supply hose for bidet seat for 111.597.00.1 and 111.798.00.1 carrier with Sigma Concealed Tank 2x4. For adding bidet seat to an installed carrier. For complete installation, must order with 249.801.00.1. | 243.173.00.1 | 46.00 | | ✓ | | | | | | |
| | Water supply hose for bidet seat add-on after finished installation of Sigma 2x6 and 2x4, Kappa and Omega Concealed Tanks. | 249.801.00.1 | 111.00 | ✓ | ✓ | ✓ | | | | | ✓ |
| OPTIONAL Installation Accessories for Geberit Duofix Carrier Frames | | | | | | | | | | | |
| Mar Park | Frame to wall anchoring for 5.125"- 7.875" (13-20 cm) thick unfinished pre-wall | 111.013.00.1 | 22.00 | | ✓ | | | | | | |
| | Frame to wall anchoring for 5.125"- 7.875" (13-20 cm) thick unfinished pre-wall | 111.815.00.1 | 34.00 | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | |
| The state of the s | Frame to wall anchoring for 5.125"- 7.875" (13-20 cm) thick unfinished pre-wall corner installations | 111.835.00.1 | 34.00 | ✓ | ✓ | \checkmark | ✓ | ✓ | ✓ | ✓ | |
| | Support brackets for wall-hung toilets with small contact surface (thin profiles) | 111.847.00.1 | 44.00 | ✓ | | \checkmark | | | | | |
| | Fire protection set for Sigma Concealed Tank 90 min. fire resistance to DIN EN 1364-1:1999-10 | 111.863.00.1 | 490.00 | ✓ | | | | | | | |
| | Frame to wall anchoring where foot installations into floor are not allowed for 5.125"-7.875" (13-20 cm) | 111.867.00.1 | 65.00 | √ | ✓ | ✓ | ✓ | ✓ | √ | ✓ | |
| | Fastening set for sinks with 14.9"-22.8" (38-58 cm) mounting centers | 111.868.00.1 | 111.00 | | | | | | ✓ | | |
| | Frame to stud fastening set for extended stud spacing from 19.75"-25.56" (50-65 cm) | 111.869.00.1 | 34.00 | √ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| 1 | Frame to wall anchoring extensions for 7.875"-15.75" (20-40 cm) thick (unfinished pre-wall) | 111.887.00.1 | 14.00 | √ | ✓ | √ | ✓ | ✓ | ✓ | ✓ | |
| | Crossbar for inlet 1/2" thread | 242.042.00.1 | 69.00 | | | | | | | ✓ | |
| ©© | Elbow supply fitting set, Gun Metal (until Q3 2017) | 465.034.00.1 | 37.00 | | | | ✓ | ✓ | √ | | |

System Accessories

Geberit Optional and Required Accessories for Installation



111.335 111.798 111.012

Description Model Number List Price 111.902 111.597 111.018 111.520 111.524 111.490 111.625 109.304

| Description | | Model Number | List Price | 111.902 | 111.597 | 111.018 | 111.520 | 111.524 | 111.490 | 111.625 | 109.304 |
|------------------------|--|--------------|------------|----------|----------|----------|---------|---------|---------|---------|-----------------------------------|
| OPTIONAL Instal | lation Waste Fitting Accessories | | | | | | | | | | |
| | PP connector set with bend for floor-mount toilets with mounting hardware, 1 x 90° bends with socket for Ø4.375" (Ø110 mm) push fit piping for Ø3.82"–4.21" (Ø97–107 mm) male connection and expansion to Ø4.375" (Ø110 mm) outlet | 152.647.00.1 | \$111.00 | | | | | | | | (For A or B discharge. See below) |
| | HDPE waste fitting outlet bend, $1 \times 90^{\circ}$ bend with socket for Ø3.50" (Ø90 mm) push fit piping and Ø3.50" (Ø90 mm) outlet | 366.061.16.1 | 22.00 | | | | | | | | (For A discharge. See below) |
| | HDPE straight connector with socket for Ø3.50" (Ø90 mm) push fit piping and Ø3.50" (Ø90 mm) outlet x 12" (31 cm) long | 366.887.16.1 | 34.00 | √ | ✓ | √ | | | | | (For A discharge. See below) |
| | HDPE connector with offset for LH horizontal drain connections (as viewed from sitting position), 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping, with 45° offset and Ø3.50" (Ø90 mm) outlet for 5.5" (13.97 cm) minimum walls only. | 366.913.16.1 | 71.00 | ✓ | ✓ | ✓ | | | | | (For A discharge. See below) |
| | HDPE connector with offset for RH horizontal drain connections (as viewed from sitting position), 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping, with 45° offset and Ø3.50" (Ø90 mm) outlet for 5.5" (13.97 cm) minimum walls only. | 366.914.16.1 | 71.00 | ✓ | ✓ | ✓ | | | | | (For A discharge. See below) |
| | Cast iron outlet bend; $1 \times 90^{\circ}$ bend with socket for Ø3.50" (Ø90 mm) push fit piping and 3" CIP outlet | 367.071.18.1 | 147.00 | ✓ | ✓ | ✓ | | | | | (For A discharge. See below) |
| | HDPE "Back-to-back" connector for horizontal drain connections; 2 x 90° bends with sockets for Ø3.50" (Ø90 mm) push fit piping, with 45° offset and expansion to Ø4.375" (Ø110 mm) outlet for 10.75" (27.31 cm) minimum walls only. | 367.485.16.1 | 147.00 | ✓ | ✓ | ✓ | | | | | (For A or B discharge. See below) |
| | HDPE "Back-to-back" connector for vertical drain connections; 2 x 90° bends with sockets for Ø3.50" (Ø90 mm) push fit piping and expansion to Ø4.375" (Ø110 mm) outlet for 10.75" (27.31 cm) minimum walls only. | 367.923.16.1 | 147.00 | ✓ | ✓ | ✓ | | | | | (For A or B discharge See below) |

Note: Any of these fittings in combination with carrier 111.798.00.1 are cUPC and IPC listed.

Waste Fitting Discharge Configurations for Floor Mount Back Outlet Toilets

Note: Mounting collar/clamp by installer



A. Floor-Mount Rear Discharge into Wall



B. Floor-Mount Rear Discharge into Floor