

SERENITY 21 – SERENITY SERIES

inches (mm)

71 ¼ x 41 ½ x 24 (1810 x 1055 x 610) • Fax on Demand #1266

SOAKER MODEL #AI21AIR7242CTO

AIR BATH MODEL #AI21AIR7242C

HOTSOAK MODEL #AI21AIR7242CHS

DRIFTBATH MODEL #AI21AIR7242CDB



AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand

FEATURES

- Deep bathing well
- Slip-resistant floor
- Modern styling
- Suitable for undermount application
- Pre-leveled ABS support base
- Center Front drain
- Lucite® cast acrylic surface
- Limited lifetime warranty

OPTIONS

- Studio Lights Package: 4 high-intensity LEDs, contemporary keypad (air baths)
- Comfort pillow: Biscuit, Black, White
- Bolt-on grab bar(s): Chrome, Oil-Rubbed Bronze, Polished Brass, Brushed Nickel, Color Matched (Biscuit, White)
- Cable drive waste & overflow: Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, Color Matched (Biscuit, Bone, White)
- Integral tile flange
- Remote control kit (Air bath only)
- Remote blower wiring kit (Air bath only)
- 1" Low Profile Deck (Skirt option not available with Low Profile Deck)

COLOR & TRIM OPTIONS

Stock	Premium
Almond	Black
Bone	Cashmere
Biscuit	Mexican Sand
White	Red
	Sandbar
	Sterling Silver

AVAILABLE SYSTEMS

AIR BATH

- Perimeter air channel lined with antimicrobial coating
- Variable-speed, heated-air blower and automated purge-and-dry cycle and water sensors
- Electronic control with wave and pulse features
- Chromotherapy
- Factory run-tested

HOTSOAK

- 2 low-profile circulation portals
- 1.5kW inline maintenance heater
- Quiet, run-dry safe pump
- Electronic one-touch off/on control
- Quiet pad anti-vibration pump mount
- Heatbent rigid PVC piping
- Factory run-tested

DRIFTBATH

- Up to 70 water-only portals
- Quiet 3/4 hp pump with integrated heat
- Electronic control
- 4 high-intensity LED chromotherapy lights
- Available in White or Biscuit





AQUATIC
Where Inspiration Takes Shape

SERENITY 21

 71 1/4 x 41 1/2 x 24 (1810 x 1055 x 610)
 inches (mm)


Note: Drop-in Serenity models feature a Pre-leveled ABS Support Base.

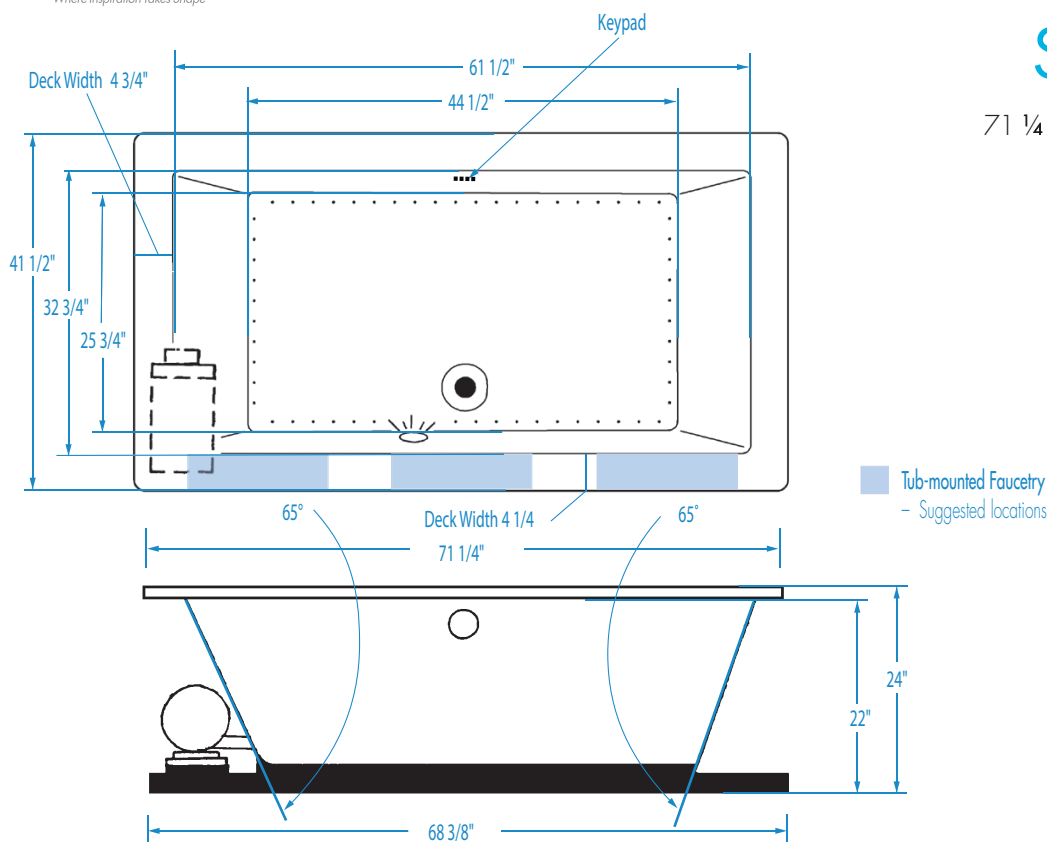
FEATURES lbs (kg) Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	System	Powered By	Heater	Controls	Drain	Pkg. Wt.
Soaker #AI21AIR7242CTO	Acrylic	-	-	-	-	Center Front	158 (72)
HotSoak #AI21AIR7242CHS	Acrylic	Water circulation	Pump	1.5 kW Inline maintenance	Electronic	Center Front	188 (86)
Air Bath #AI21AIR7242C	Acrylic	Air channel	Variable speed blower	Integrated	Electronic	Center Front	188 (86)
DriftBath #AI21AIR7242CDB	Acrylic	Water circulation	Pump	Integrated	Electronic	Center Front	199 (91)

DIMENSIONS inches (mm)

Width	Depth	Height	Skirt Height
Overall / Net	Overall / Net	Overall / Net	
71 1/4 (1810)	41 1/2 (1055)	24 (610)	-

SUMP DATA inches (mm)

Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
163 (617)	-	61 1/2 (1560)	44 1/2 (1130)	32 3/4 (830)	25 3/4 (655)

PLUMBING DIMENSIONS inches (mm)

A	B	Drain Diameter / Clearance
3 3/4 (95)	11 3/4 (300)	2 (50) / 1 1/2 (35)

ELECTRICAL DATA

Component	Specification	Requirement
Heated Blower (Air Bath)	10.5 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI
Pump (HotSoak)	1/15 HP; 1.3 AMP; 120V	20 AMP; 120V, separate circuit; Class A GFCI
Heater (HotSoak)	1.5 kW; 12 AMP; 120V	
Pump (DriftBath)	3/4 HP; 8.8 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI

NOTES:

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 16 (405 x 405) minimum access required at pump/blower location(s).

3) For Low Profile Deck, framing height will need to be increased by an additional 1".

4) If a (3T) tiling flange is selected, then the keypad is located opposite of the flange.

Each Serenity air bath is equipped with an air heating system to raise the temperature of the air entering the bath. This air temperature will be lower than the bathing temperature of the water, but will help reduce rapid decrease in water temperature. In addition, the air coming from the air jets will feel cool against the skin. This system does not heat the water.

SERENITY


PUMP/BLOWER LOCATIONS

TECHNICAL SPECIFICATIONS


Air Bath • HotSoak • DriftBath

AIR BATH

Center Drain Models

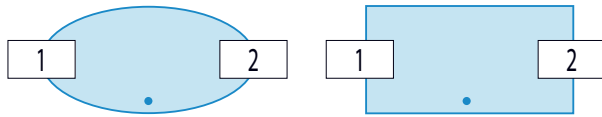


End Drain Models

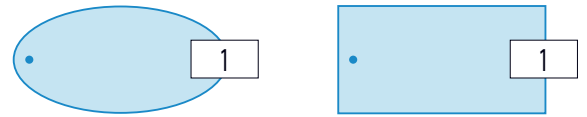


HOTSOAK

Center Drain Models

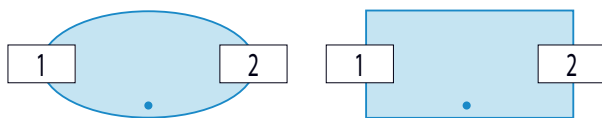


End Drain Models

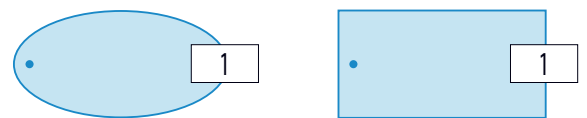

DRIFTBATH

Center Drain Models

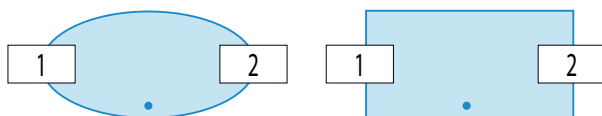

End Drain Models



Center Drain Models

