

Bowen Ceiling Fan Collection

60" Bowen Ceiling Fan MWH

330243MWH

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____



Product Information

Product ID	330243MWH
Blade Finish	Matte White/Matte White
Collection	Bowen Ceiling Fan Collection


Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	127	6479	96	.55	67
Med	100	4754	124	.44	38
Low	60	2659	187	.27	14

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	60"
Blades Reversible	No
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	188MM X 25MM
Motor Type	AC

Dimensions

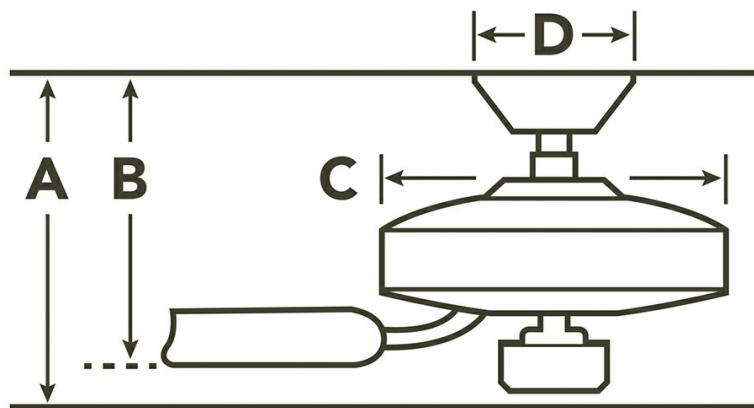

Downrod	A	B	C	D
1.00 OD X 4.50	13.75	11.00	8.00	5.90

Downlight

Optional Light Kit Available	Yes
------------------------------	-----

Safety Listings & Certifications

Safety Rated	Dry
Energy Star	Yes
Warranty	www.kichler.com/warranty

Installation

The electrical junction box

Bowen Ceiling Fan Collection
60" Bowen Ceiling Fan MWH
 330243MWH

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
Matte White	330243MWH		MATTE WHITE	MATTE WHITE
Brushed Nickel	330243NI		SILVER	WALNUT
Olde Bronze	330243OZ		WALNUT	CHERRY

Installation requirements and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""

Electrical Requirements 120V 60Hz AC

Minimum Distance Between Bottom Of Fan Blade To Floor 7.5 feet

Control Options

Product ID	Descr
337001WH	Universal Remote Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
370040	4 Speed Rotary Switch 10 AMP

Bowen Ceiling Fan Collection

60" Bowen Ceiling Fan NI

330243NI (Brushed Nickel)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Product Information

Product ID	330243NI
Finish	Brushed Nickel
Blade Finish	Silver/Walnut
Collection	Bowen Ceiling Fan Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	127	6479	96	.55	67
Med	100	4754	124	.44	38
Low	60	2659	187	.27	14

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	60"
Blades Reversible	No
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	188MM X 25MM
Motor Type	AC

Downlight

Optional Light Kit Available	Yes
------------------------------	-----

Safety Listings & Certifications


Safety Rated	Dry
Energy Star	Yes
Warranty	www.kichler.com/warranty

Installation

The electrical junction box



Dimensions

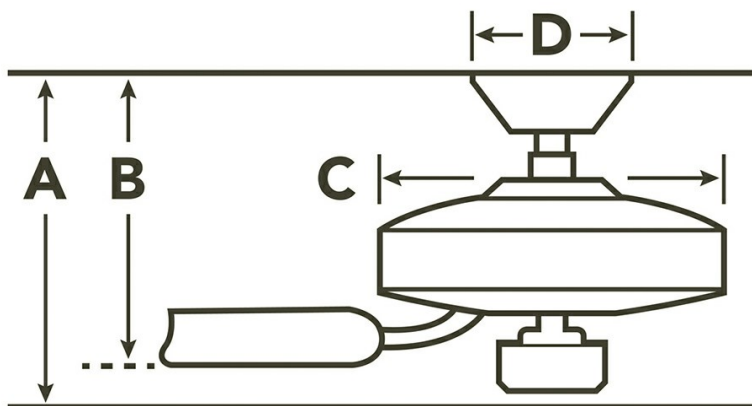

Downrod	A	B	C	D
1.00 OD X 4.50	13.75	11.00	8.00	5.90

Available Finishes

Kichler
7711 East Pleasant Valley Road
Cleveland, Ohio 44131-8010
Toll free: 866.558.5706 or kichler.com

Notes:

- 1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
- 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

KICHLER.

Bowen Ceiling Fan Collection

60" Bowen Ceiling Fan NI

330243NI (Brushed Nickel)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Finish	Fixture	Glass	Blade 1	Blade 2
Matte White	330243MWH		MATTE WHITE	MATTE WHITE
Brushed Nickel	330243NI		SILVER	WALNUT
Olde Bronze	330243OZ		WALNUT	CHERRY

Installation requirements and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked "For Fan Support"

Electrical Requirements 120V 60Hz AC

Minimum Distance Between Bottom Of Fan Blade To Floor 7.5 feet

Control Options

Product ID	Descr
337001WH	Universal Remote Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
370040	4 Speed Rotary Switch 10 AMP

Bowen Ceiling Fan Collection

60" Bowen Ceiling Fan OZ

330243OZ (Olde Bronze)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Product Information

Product ID	330243OZ
Finish	Olde Bronze
Blade Finish	Walnut/Cherry
Collection	Bowen Ceiling Fan Collection

Airflow, Power and Efficiency


Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	127	6479	96	.55	67
Med	100	4754	124	.44	38
Low	60	2659	187	.27	14



Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	60"
Blades Reversible	No
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	188MM X 25MM
Motor Type	AC

Dimensions

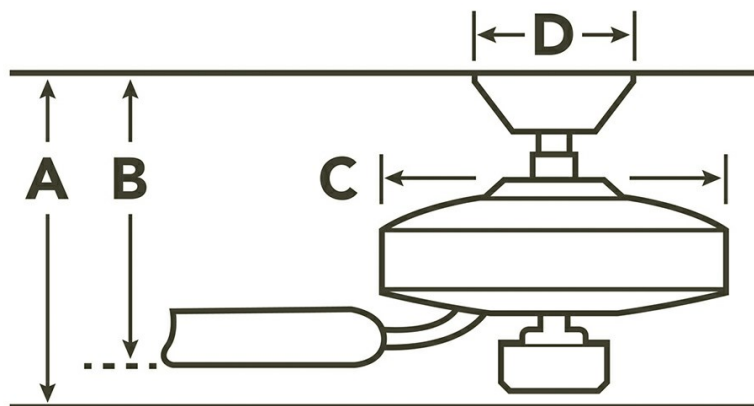

Downrod	A	B	C	D
1.00 OD X 4.50	13.75	11.00	8.00	5.90

Downlight

Optional Light Kit Available	Yes
------------------------------	-----

Safety Listings & Certifications

Safety Rated	Dry
Energy Star	Yes
Warranty	www.kichler.com/warranty

Installation

The electrical junction box

Available Finishes

Notes:

1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.

2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

Bowen Ceiling Fan Collection

60" Bowen Ceiling Fan OZ

330243OZ (Olde Bronze)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Finish	Fixture	Glass	Blade 1	Blade 2
Matte White	330243MWH		MATTE WHITE	MATTE WHITE
Brushed Nickel	330243NI		SILVER	WALNUT
Olde Bronze	330243OZ		WALNUT	CHERRY

Installation requirements and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked "For Fan Support"

Electrical Requirements 120V 60Hz AC

Minimum Distance Between Bottom Of Fan Blade To Floor 7.5 feet

Control Options

Product ID	Descr
337001WH	Universal Remote Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
370040	4 Speed Rotary Switch 10 AMP

Notes:

- 1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
- 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.