

Renew Patio Collection

52" Renew Patio Ceiling Fan MWH

339515MWH

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Product Information

Product ID	339515MWH
Blade Finish	Matte White/Non-Reversible
Collection	Renew Patio Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	195	5717	85	.58	67
Med	138	4179	128	.41	33
Low	65	2147	205	.24	10

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	52"
Blades Reversible	No
Blade Material	ABS
Optional Blades Available	No
Downrod 1	1.00 OD X 4.00
Downrod 2	FLUSH MOUNT
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes, Dual Mount Included
Lead Wire Length	78.00"
Motor Size	153MM X 15MM
Motor Type	AC

Downlight

Optional Light Kit Available	No
------------------------------	----

Safety Listings & Certifications

Safety Rated	Wet
Energy Star	Yes
Warranty	www.kichler.com/warranty


Installation

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds.

Installation requirements



Dimensions

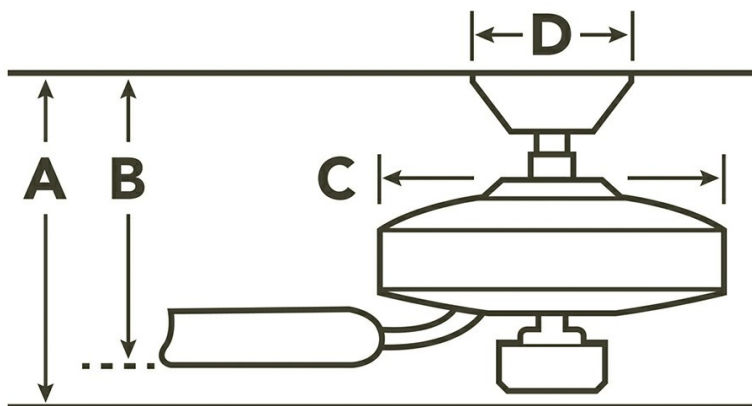

Downrod	A	B	C	D
1.00 OD X 4.00	12.34	10.00	11.75	5.90
FLUSH MOUNT	9.25	7.00	11.75	5.90

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

Kichler
 7711 East Pleasant Valley Road
 Cleveland, Ohio 44131-8010
 Toll free: 866.558.5706 or kichler.com

Notes:

- 1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
- 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

KICHLER.

Renew Patio Collection
52" Renew Patio Ceiling Fan MWH
 339515MWH

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

White	339515WH	N/A	WHITE	NON-REVERSIBLE
Satin Natural Black	339515SBK	N/A	SATIN NATURAL BLACK	NON-REVERSIBLE
Tannery Bronze Powder Coat	339515TZP	N/A	BROWN	NON-REVERSIBLE
Matte White	339515MWH		MATTE WHITE	NON-REVERSIBLE

Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""

Electrical Requirements	120V 60Hz AC
Hanging Weight	23.1 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function

Renew Patio Collection
52 Inch Renew Patio Ceiling Fan SBK
 339515SBK (Satin Black)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Product Information

Product ID	339515SBK
Finish	Satin Black
Blade Finish	Satin Natural Black/Non-Reversible
Collection	Renew Patio Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	195	5717	85	.58	67
Med	138	4179	128	.41	33
Low	65	2147	205	.24	10

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	52"
Blades Reversible	No
Blade Material	ABS
Optional Blades Available	No
Downrod 1	1.00 OD X 4.00
Downrod 2	FLUSH MOUNT
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes, Dual Mount Included
Lead Wire Length	78.00"
Motor Size	153MM X 15MM
Motor Type	AC

Downlight

Optional Light Kit Available	No
------------------------------	----

Safety Listings & Certifications


Safety Rated	Wet
Energy Star	Yes
Warranty	www.kichler.com/warranty

Installation

The electrical junction box



Dimensions

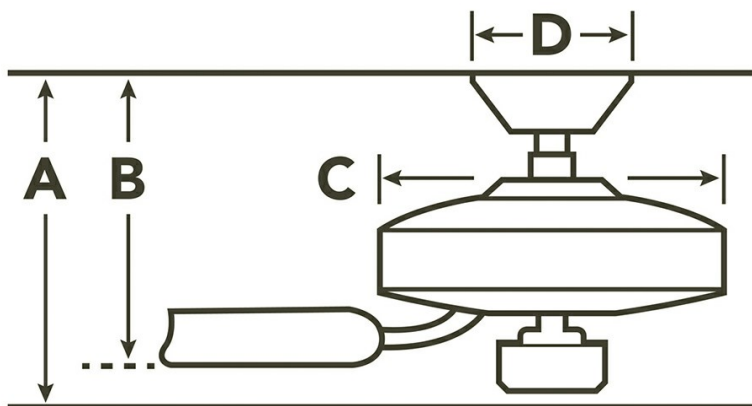

Downrod	A	B	C	D
1.00 OD X 4.00	12.34	10.00	11.75	5.90
FLUSH MOUNT	9.10	6.75	11.75	5.90

Available Finishes

Kichler
 7711 East Pleasant Valley Road
 Cleveland, Ohio 44131-8010
 Toll free: 866.558.5706 or kichler.com

Notes:
 1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

KICHLER.

Renew Patio Collection

52 Inch Renew Patio Ceiling Fan SBK

339515SBK (Satin Black)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Finish	Fixture	Glass	Blade 1	Blade 2
White	339515WH	N/A	WHITE	NON-REVERSIBLE
Satin Natural Black	339515SBK	N/A	SATIN NATURAL BLACK	NON-REVERSIBLE
Tannery Bronze Powder Coat	339515TZP	N/A	BROWN	NON-REVERSIBLE
Matte White	339515MWH		MATTE WHITE	NON-REVERSIBLE

Installation requirements	and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	23.1 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function

Renew Patio Collection

52 Inch Renew Patio Ceiling Fan TZP

339515TZP (Tannery Bronze Powder Coat)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Product Information

Product ID	339515TZP
Finish	Tannery Bronze Powder Coat
Blade Finish	Brown/Non-Reversible
Collection	Renew Patio Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	195	5717	85	.58	67
Med	138	4179	128	.41	33
Low	65	2147	205	.24	10

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	52"
Blades Reversible	No
Blade Material	ABS
Optional Blades Available	No
Downrod 1	1.00 OD X 4.00
Downrod 2	FLUSH MOUNT
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes, Dual Mount Included
Lead Wire Length	78.00"
Motor Size	153MM X 15MM
Motor Type	AC

Downlight

Optional Light Kit Available	No
------------------------------	----

Safety Listings & Certifications


Safety Rated	Wet
Energy Star	Yes
Warranty	www.kichler.com/warranty

Installation

The electrical junction box and support structure must be



Dimensions

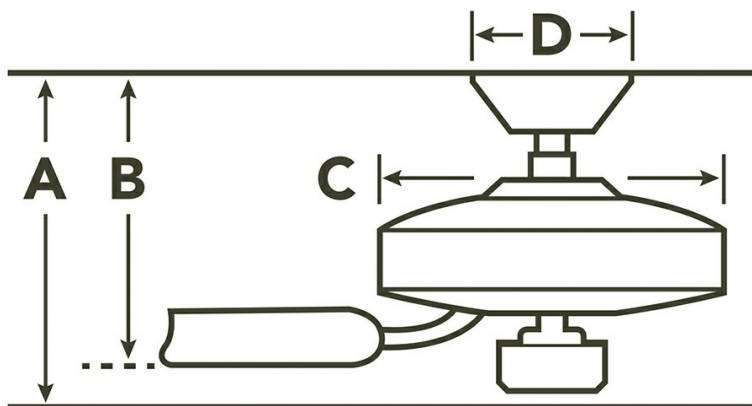

Downrod	A	B	C	D
1.00 OD X 4.00	12.34	10.00	11.75	5.90
FLUSH MOUNT	9.10	6.75	11.75	5.90

Available Finishes

Kichler
 7711 East Pleasant Valley Road
 Cleveland, Ohio 44131-8010
 Toll free: 866.558.5706 or kichler.com

Notes:

- 1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
- 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

KICHLER.

Renew Patio Collection

52 Inch Renew Patio Ceiling Fan TZP

339515TZP (Tannery Bronze Powder Coat)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Finish	Fixture	Glass	Blade 1	Blade 2
White	339515WH	N/A	WHITE	NON-REVERSIBLE
Satin Natural Black	339515SBK	N/A	SATIN NATURAL BLACK	NON-REVERSIBLE
Tannery Bronze Powder Coat	339515TZP	N/A	BROWN	NON-REVERSIBLE
Matte White	339515MWH		MATTE WHITE	NON-REVERSIBLE

Installation requirements	securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	23.1 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function

Notes:

- 1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
- 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

Renew Patio Collection

52 Inch Renew Patio Ceiling Fan WH

339515WH (White)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Product Information

Product ID	339515WH
Finish	White
Blade Finish	White/Non-Reversible
Collection	Renew Patio Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	195	5717	85	.58	67
Med	138	4179	128	.41	33
Low	65	2147	205	.24	10

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	52"
Blades Reversible	No
Blade Material	ABS
Optional Blades Available	No
Downrod 1	1.00 OD X 4.00
Downrod 2	FLUSH MOUNT
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes, Dual Mount Included
Lead Wire Length	78.00"
Motor Size	153MM X 15MM
Motor Type	AC

Downlight

Optional Light Kit Available	No
------------------------------	----

Safety Listings & Certifications


Safety Rated	Wet
Energy Star	Yes
Warranty	www.kichler.com/warranty

Installation

The electrical junction box and support structure must be



Dimensions

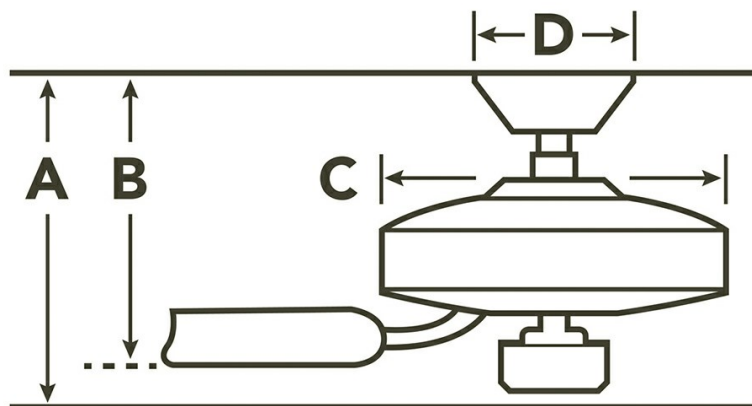

Downrod	A	B	C	D
1.00 OD X 4.00	12.34	10.00	11.75	5.90
FLUSH MOUNT	9.10	6.75	11.75	5.90

Available Finishes

Kichler
 7711 East Pleasant Valley Road
 Cleveland, Ohio 44131-8010
 Toll free: 866.558.5706 or kichler.com

Notes:

- 1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
- 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

KICHLER.

Renew Patio Collection

52 Inch Renew Patio Ceiling Fan WH

339515WH (White)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Finish	Fixture	Glass	Blade 1	Blade 2
White	339515WH	N/A	WHITE	NON-REVERSIBLE
Satin Natural Black	339515SBK	N/A	SATIN NATURAL BLACK	NON-REVERSIBLE
Tannery Bronze Powder Coat	339515TZP	N/A	BROWN	NON-REVERSIBLE
Matte White	339515MWH		MATTE WHITE	NON-REVERSIBLE

Installation requirements	securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	23.1 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function

Notes:

- 1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
- 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.